

## KUEBLER - ABSOLUTE-CODED ANGULAR TRANSMITTER SENDIX F5863 / F5883, OPTICAL, SSI, Ø58 MM

SERIE F5863

- Housing diameter Ø58 mm
- SSI-Interface
- Total resolution 41 bits
- 100% insensitive to magnetic fields



### PRODUCT DESCRIPTION

Sendix F5863 / F5883 is a series of robust absolute encoded SSI axis sensors for demanding environments. Thanks to its rugged construction with Safety-Lock™ and the fully cast housing, the sensor can also handle the more demanding applications where the requirements are high. The wide temperature range combined with the high enclosure class allows the sensor to be used outdoors as well as applications where large temperature changes occur. Perfect for applications requiring high resolution.

The LED indication facilitates diagnostics of the sensor in place and saves time when troubleshooting.

Please refer to the images below for ordering information.

Order code	8.F5863	.XXXX	.XXXX
Shaft version	Type	a b c d	e f g h
<b>a Flange</b>		<b>c Interface / power supply</b>	<b>e Code</b>
<b>1 = clamping flange, IP65 ø 58 mm [2.28"]</b>		1 = SSI, BiSS / 5 V DC	<b>B = SSI, binary</b>
<b>3 = clamping flange, IP67 ø 58 mm [2.28"]</b>		<b>2 = SSI, BiSS / 10 ... 30 V DC</b>	<b>C = BiSS, binary</b>
<b>2 = synchro flange, IP65 ø 58 mm [2.28"]</b>		3 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC	<b>G = SSI, gray</b>
<b>4 = synchro flange, IP67 ø 58 mm [2.28"]</b>		4 = SSI, BiSS + 2048 ppr. SinCos / 10 ... 30 V DC	<b>g Resolution (multiturn)<sup>4)</sup></b>
		5 = SSI, BiSS / 5 V DC, with sensor output	<b>2 = 12 bit MT</b>
		6 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC, with sensor output	6 = 16 bit MT
		7 = SSI, BiSS + 2048 ppr. RS422 (TTL-comp.) / 5 V DC	4 = 24 bit MT
		8 = SSI, BiSS + 2048 ppr. RS422 (TTL-comp.) / 10 ... 30 V DC	
<b>b Shaft (ø x L), with flat</b>		<b>d Type of connection</b>	<b>h Options (service)</b>
<b>1 = 6 x 10 mm [0.24 x 0.39"]<sup>1)</sup></b>		1 = axial cable, 1 m [3.28'] PVC	1 = no option
<b>2 = 10 x 20 mm [0.39 x 0.79"]<sup>2)</sup></b>		A = axial cable, special length PVC *)	2 = status LED
3 = 1/4" x 7/8"		<b>2 = radial cable, 1 m [3.28'] PVC</b>	<b>3 = SET button and status LED</b>
4 = 3/8" x 7/8"		B = radial cable, special length PVC *)	
		3 = axial M23 connector, 12-pin	
		<b>4 = radial M23 connector, 12-pin</b>	
		5 = axial M12 connector, 8-pin <sup>3)</sup>	
		6 = radial M12 connector, 8-pin <sup>3)</sup>	
		<b>f Resolution (singleturn)<sup>4)</sup></b>	
		B = 9 bit ST	
		A = 10 bit ST	
		1 = 11 bit ST	
		2 = 12 bit ST	
		<b>3 = 13 bit ST</b>	
		4 = 14 bit ST	
		7 = 17 bit ST	
		<b>Optional on request</b>	
		- Ex 2/22 <sup>5)</sup>	
		- surface protection salt spray tested	
		- other singleturn resolutions	
		<b>*) Available special lengths (connection types A, B):</b>	
		2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21']	
		order code expansion .XXXX = length in dm	
		ex.: 8.F5863.122A.G323.0030 (for cable length 3 m)	

<b>Order code</b>		<b>8.F5883</b>		.XXXXX.XXXXX							
<b>Hollow shaft</b>		Type		a	b	c	d	e	f	g	h

**a Flange**  
 1 = with spring element, long, IP65  
 2 = with spring element, long, IP67  
 3 = with stator coupling, IP65, ø 65 mm [2.56"]  
 4 = with stator coupling, IP67, ø 65 mm [2.56"]  
**5 = with stator coupling, IP65, ø 63 mm [2.48"]**  
 6 = with stator coupling, IP67, ø 63 mm [2.48"]

**b Through hollow shaft**  
 3 = ø 10 mm [0.39"]  
**4 = ø 12 mm [0.47"]**  
 5 = ø 14 mm [0.55"]  
 6 = ø 15 mm [0.59"]  
 8 = ø 3/8"  
 9 = ø 1/2"

**c Interface / power supply**  
 1 = SSI, BiSS / 5 V DC  
**2 = SSI, BiSS / 10 ... 30 V DC**  
 3 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC  
 4 = SSI, BiSS + 2048 ppr. SinCos / 10 ... 30 V DC  
 5 = SSI, BiSS / 5 V DC, with sensor output  
 6 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC, with sensor output  
 7 = SSI, BiSS + 2048 ppr. RS422 (TTL-comp.) / 5 V DC  
 8 = SSI, BiSS + 2048 ppr. RS422 (TTL-comp.) / 10 ... 30 V DC

**d Type of connection**  
 2 = radial cable, 1 m [3.28"] PVC  
 B = radial cable, special length PVC \*)  
**E = tangential cable, 1 m [3.28"] PVC**  
 F = tangential cable, special length PVC \*)  
**4 = radial M23 connector, 12-pin**  
 6 = radial M12 connector, 8-pin <sup>2)</sup>

**e Code**  
 B = SSI, binary  
 C = BiSS, binary  
**G = SSI, gray**

**f Resolution (singleturn) <sup>1)</sup>**  
 B = 9 bit ST  
 A = 10 bit ST  
 1 = 11 bit ST  
 2 = 12 bit ST  
**3 = 13 bit ST**  
 4 = 14 bit ST  
 7 = 17 bit ST

**g Resolution (multiturn) <sup>1)</sup>**  
**2 = 12 bit MT**  
 6 = 16 bit MT  
 4 = 24 bit MT


**h Options (service)**  
 1 = no option  
 2 = status LED  
**3 = SET button and status LED**

*Optional on request*  
 - Ex 2/22 (not for type of connection E, F) <sup>3)</sup>  
 - surface protection salt spray tested  
 - other singleturn resolutions

\*) Available special lengths (connection types B, F):  
 2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21']  
 order code expansion .XXXX = length in dm  
 ex.: 8.F5883.542B.G323.0030 (for cable length 3 m)


# TECHNICAL DATA

<b>Connection</b>	Cable, M12, M23 contact
<b>Housing diameter</b>	58 mm
<b>IP class</b>	IP65, IP67
<b>Mounting</b>	Shoulder
<b>Output</b>	SSI
<b>Resolution MT</b>	SSI: max. 24 bit, BiSS: max. 24 bit
<b>Resolution ST</b>	SSI: 10-17 bit, BiSS: 10-17 bit
<b>Sensor type</b>	Absolute
<b>Shaft diameter max</b>	10 mm
<b>Shaft diameter min</b>	6 mm
<b>Supply voltage dc max</b>	30 V DC
<b>Supply voltage dc min</b>	5 V DC
<b>Temperature operational max</b>	85 °C
<b>Temperature operational min</b>	-40 °C
<b>Version</b>	Multiturn

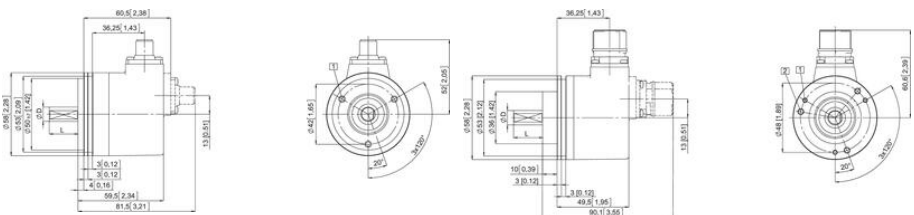

Interface	Type of connection	Features	Cable (isolate unused wires individually before initial start-up)
1,2	1,2,A,B,E,F	SET,DIR,Status	Signal: 0V -V+ -V- C+ C- D+ D- SET DIR Stat N/C N/C' H Cable colour: WH BN GN YE GF PK BU RD BK - - - (sheld)
Interface	Type of connection	Features	M12 connector
1,2	3,4	SET,DIR,Status	Signal: 0V -V+ -V- C+ C- D+ D- SET DIR Stat N/C N/C' H Pin: 1 2 3 4 5 6 7 8 9 10 11 12 PH
Interface	Type of connection	Features	Cable (isolate unused wires individually before initial start-up)
5	1,2,A,B,E,F	SET,DIR,Status sensor output	Signal: 0V -V+ -V- C+ C- D+ D- SET DIR Stat N/C N/C' H Cable colour: WH BN GN YE GF PK BU RD BK - - - (sheld)
Interface	Type of connection	Features	M12 connector
5	3,4	SET,DIR,Status sensor output	Signal: 0V -V+ -V- C+ C- D+ D- SET DIR Stat N/C N/C' H Pin: 1 2 3 4 5 6 7 8 9 10 11 12 PH
Interface	Type of connection	Features	Cable (isolate unused wires individually before initial start-up)
3,4,7,8	1,2,A,B,E,F	SET,DIR,StatCos or Inco RS422	Signal: 0V -V+ -V- C+ C- D+ D- SET DIR A X B H Cable colour: WH BN GN YE GF PK BU RD BK VT - - (sheld)
Interface	Type of connection	Features	M12 connector
3,4,7,8	3,4	SET,DIR,StatCos or Inco RS422	Signal: 0V -V+ -V- C+ C- D+ D- SET DIR A X B H Pin: 1 2 3 4 5 6 7 8 9 10 11 12 PH
Interface	Type of connection	Features	Cable (isolate unused wires individually before initial start-up)
6	1,2,A,B,E,F	StatCos or Inco RS422 sensor output	Signal: 0V -V+ -V- C+ C- D+ D- A X B H Cable colour: WH BN GN YE GF PK BU RD BK VT - - (sheld)
Interface	Type of connection	Features	M12 connector
6	3,4	StatCos or Inco RS422 sensor output	Signal: 0V -V+ -V- C+ C- D+ D- A X B H Pin: 1 2 3 4 5 6 7 8 9 10 11 12 PH
Interface	Type of connection	Features	M12 connector
1,2	5,6	SET,DIR	Signal: 0V -V+ -V- C+ C- D+ D- SET DIR H Pin: 1 2 3 4 5 6 7 8 PH

V+ Encoder power supply +VDC  
 0V Encoder power supply ground (GND 0V)  
 0Vmax / 0Vmin: Using the sensor outputs of the encoder, the voltage present can be measured and if necessary increased accordingly.  
 C+, C-: Clock signal  
 D+, D-: Data signal  
 A, X: Incremental output channel A (zooies)  
 B, H: Incremental output channel B (lines)  
 SET: Set input. The current position becomes defined as position zero.  
 DIR: Direction input. If this input is active, output values are counted backwards (decrease) when the shaft is turning clockwise.  
 Stat: Status output  
 PH H: Plug connector housing (sheld)



Interface	Type of connection	Features	Cable (isolate unused wires individually before initial start-up)
1,2	1,2,A,B,E,F	SET,DIR,Status	Signal: 0V -V+ -V- C+ C- D+ D- SET DIR Stat N/C N/C' H Cable colour: WH BN GN YE GF PK BU RD BK - - - (sheld)
Interface	Type of connection	Features	M12 connector
1,2	3,4	SET,DIR,Status	Signal: 0V -V+ -V- C+ C- D+ D- SET DIR Stat N/C N/C' H Pin: 1 2 3 4 5 6 7 8 9 10 11 12 PH
Interface	Type of connection	Features	Cable (isolate unused wires individually before initial start-up)
5	1,2,A,B,E,F	SET,DIR,Status sensor output	Signal: 0V -V+ -V- C+ C- D+ D- SET DIR Stat N/C N/C' H Cable colour: WH BN GN YE GF PK BU RD BK - - - (sheld)
Interface	Type of connection	Features	M12 connector
5	3,4	SET,DIR,Status sensor output	Signal: 0V -V+ -V- C+ C- D+ D- SET DIR Stat N/C N/C' H Pin: 1 2 3 4 5 6 7 8 9 10 11 12 PH
Interface	Type of connection	Features	Cable (isolate unused wires individually before initial start-up)
3,4,7,8	1,2,A,B,E,F	SET,DIR,StatCos or Inco RS422	Signal: 0V -V+ -V- C+ C- D+ D- SET DIR A X B H Cable colour: WH BN GN YE GF PK BU RD BK VT - - (sheld)
Interface	Type of connection	Features	M12 connector
3,4,7,8	3,4	SET,DIR,StatCos or Inco RS422	Signal: 0V -V+ -V- C+ C- D+ D- SET DIR A X B H Pin: 1 2 3 4 5 6 7 8 9 10 11 12 PH
Interface	Type of connection	Features	Cable (isolate unused wires individually before initial start-up)
6	1,2,A,B,E,F	StatCos or Inco RS422 sensor output	Signal: 0V -V+ -V- C+ C- D+ D- A X B H Cable colour: WH BN GN YE GF PK BU RD BK VT - - (sheld)
Interface	Type of connection	Features	M12 connector
6	3,4	StatCos or Inco RS422 sensor output	Signal: 0V -V+ -V- C+ C- D+ D- A X B H Pin: 1 2 3 4 5 6 7 8 9 10 11 12 PH
Interface	Type of connection	Features	M12 connector
1,2	5,6	SET,DIR	Signal: 0V -V+ -V- C+ C- D+ D- SET DIR H Pin: 1 2 3 4 5 6 7 8 PH

V+ Encoder power supply +VDC  
 0V Encoder power supply ground (GND 0V)  
 0Vmax / 0Vmin: Using the sensor outputs of the encoder, the voltage present can be measured and if necessary increased accordingly.  
 C+, C-: Clock signal  
 D+, D-: Data signal  
 A, X: Incremental output channel A (zooies)  
 B, H: Incremental output channel B (lines)  
 SET: Set input. The current position becomes defined as position zero.  
 DIR: Direction input. If this input is active, output values are counted backwards (decrease) when the shaft is turning clockwise.  
 Stat: Status output  
 PH H: Plug connector housing (sheld)

