#### **OEM Automatic Ltd**

Address: Whiteacres, Whetstone Leicester, LE8 6ZG 0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

# POWER SUPPLY 3-PHASE, 48 V DC DIMENSION X SERIES 20A

XT40.481 PSU 3PH 400V ac I/P 48V dc 20A 960W O/P

- . Output current of 20 A
- Up to 96% efficiency
- · Semi Regulated
- Replaces linear transformers
- · Very high short-circuit current



L3

#### PRODUCT DESCRIPTION

Dimension X series is a series of semi-regulated power supplies. A so-called semi-controlled unit means that the output voltage is regulated within the specified input voltage range. Outside this range decreases / increases the output voltage compared to the input voltage.

The unit has a bonus effect of 25% (25 A) to cope with high starting currents, as well as a very high short-circuit current enables safe trips for eg MCB. The unit leaves up to 90 A at 100 ms. Lasts short circuit longer than 100 ms, the unit shuts off automatically. See chart below for details. Recovery occurs in the front, or by disconnecting the primary voltage.


A yellow LED indicates the status and warns of the following errors; phase failure, over-temperature and high load current.

The unit has a low weight (1.4 kg), no inrush current and active transient filter that protects the secondary side from transients on the primary side.


Typical applications include motors, solenoids or other "power hungry" loads that do not have requirements for accurate voltage regulation. X series are a great alternative to traditional transformers. With lower energy costs and easier installation, along with an attractive price concept means a low total cost.

We recommend free space of 40 mm above and 20 mm under the power supply, and 5 mm at the sides. (if neighbouring products are counted as a heat source spacing of 15 mm is recommended).

Input voltage range/regulation



#### Output characteristics

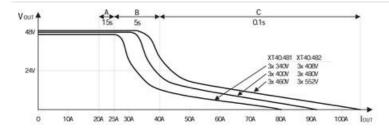

## **TECHNICAL DATA**

## **INPUT DATA**

Input voltage ac	400 V
Input voltage ac min	360 V AC
Input voltage ac max	440 V AC
Inrush current at 400 V ac typical	4 A
Power factor at 400 V ac, full load. Typical	0.93
Number of phases	3

### **OUTPUT DATA**

Output voltage	48 V DC
Output voltage min	48 V DC
Output voltage max	48 V DC
Output current	20 A
Power	960 W

### **EFFICIENCY / LIFETIME / MTBF**

Efficiency at 400 V ac, full load, typical	96 %
Lifetime at 400 V ac, full load and +40 ° C	77000 h
MTBF (IEC 61709) 400 V ac, max loan, +40 °C	541000 h


## **DIMENSIONS**


Width	96 mm
Height	124 mm
Depth	159 mm
Weight	1.4 kg

### **OTHER**

Approvals	CB, CE, CSA, UL
-----------	-----------------

Hold time at 400 V ac, typical full load	3 ms
IP class	IP20
Material protection	Aluminium
Supply frequency	50-60 ±6 %
Ripple max	300 mV pp
Series	Dimension X
Power consumption at 400 V ac	1.65 A
Power drop from +60 °C to + 70 °C	24 W/°C
Temperature min without derating	-25 °C
Temperature max without derating	60 °C
Type Power Supply	AC-DC
Active Transient	Yes









Fig. 9-1 Efficiency vs. output current Efficiency 96%-95 94 93 92 91 90 89 85 88 <del>+</del> 2.5 **Output Current** 

10 12.5 15 17.5 20A



25. COMPARISON BETWEEN THE XT40, A TRANSFORMER AND A TRADITIONAL SWITCHED-MODE POWER SUPPLY

	XT40 Semi- regulated power supply	Traditional switched-mode power supply	Transformer power supply
Input voltage range	+	**	
Inrush current surge	**	+	
Hold-up time			
Phase-loss operation			
Efficiency	***	**	
Output voltage regulation		++	
Output adjustment range		**	
Ripple & noise voltage		**	
Error diagnostics	**	**	
Harmonic distortion (PFC)		+	
EMC	**	**	
Ease of installation	**	**	
Size	***	**	
Weight	***		

	Fig. 11-1 Front side o	XT40.481	
Output Terminals Large screw terminal	66	DC-ok LED (green) Indicates a normal operation. if the output voltage is higher	
Positive output     Negative (return) output	et esv žia	Warning LED (yellow)  - A steady-state light indica current higher than the no and that the internal shut running.	tes an output
See chapter 12 "Terminals and Wiring" to choose appropriate wire size.	PULS	- A double flash indicates a too low / too high input ve (XT40.481: < 3x43374e or > XT40.482: < 3x40074e or >	oltage. 3x467Vac
Input Terminals		<ul> <li>A fast flash warns of a temperature shut-down.</li> <li>can be expected within the ambient temperature current stays constant.</li> </ul>	A shut-down 10 minutes, if
Screw terminals L1, L2, L3:	Prost Supply	Shut-down LED (red) and re The red LED flashes when the	
Line inputs  PE (Protective Earth) input	0000 11 13 13 ®	shut down. Pressing the res cycling the input power ( initiates a restart. If the fa cleared the device will operate	et button or 10s required) ult has been

Fig. 22-1 Front view

12 20.3

DC ok O Warning O

Warning O

Overload

M.M. Check Input

MMML Temperature


Shut-downO


L1 L2 L3 PE Reset ●


13.5 38.1

Width: 96mm

3.78"







Allowed Output Current

20A

15

Ambient Temperature

-25

0


20


40

60

70°C

Fig. 9-1 Efficiency vs. output current Efficiency 96% 95 94 93 92 91 90 89 **Output Current** 88 10 12.5 15 17.5 20A 2.5 5 7.5





25. COMPARISON BETWEEN THE XT40, A TRANSFORMER AND A TRADITIONAL



