



### DC/DC CONVERTER


- 24V DC-Input
- Isolated 24Vdc Output
- NEC Class 2 Output
- Quick-connect Spring-clamp Connection Terminals
- Efficiency up to 90.5%
- Width only 32mm
- Full Power Between -25°C and +60°C
- Soft-start Function Included
- Minimal Inrush Current Surge
- Reverse Input Polarity Protection
- 3 Year Warranty

### GENERAL DESCRIPTION

The Dimension CD-Series offer DIN-rail DC/DC converters in the 92-120W output power range in a very compact housing. These DC/DC converters are allowed to run with a battery or similar sources or can also be used to refresh and stabilize the 24Vdc on the end of long cable runs. The basic units include all the essential basic functions while the -S1 version is equipped with quick-connect spring clamp terminals, a DC-OK-contact which monitors the output and an input-low-relay-contact. The -L1 version additionally fulfills the NEC Class 2 requirements. All devices except the CD5.241-L1 have a PowerBoost of 20% incorporated. This extra power can even be used continuously up to +45°C.

#### CD-Series

Related products

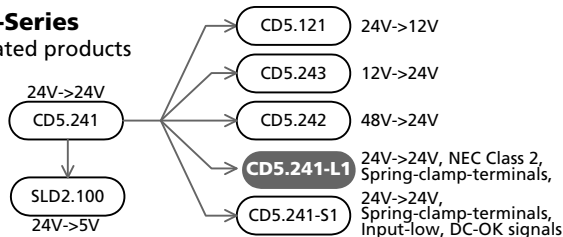

### SHORT-FORM DATA

|                      |                 |                |
|----------------------|-----------------|----------------|
| Output voltage       | DC 24V          |                |
| Adjustment range     | not adjustable  |                |
| Output current       | 3.8A            | NEC Class 2    |
| Output power         | 92W             |                |
| Output ripple        | < 50mVpp        | 20Hz to 20MHz  |
| Input voltage        | DC 24V          |                |
| Input voltage range  | 14.4 to 32.4Vdc | full specified |
| Input current        | typ. 4.25A      | at 24Vdc input |
| Input inrush current | typ. 1.2A peak  |                |
| Efficiency           | 90.5%           | at 24Vdc input |
| Losses               | 9.7W            | at 24Vdc input |
| Temperature range    | -25°C to +70°C  | operational    |
| Derating             | 0W/°C           | +60 to +70°C   |
| Hold-up time         | typ. 7ms        | at 24Vdc input |
| Dimensions           | 32x124x102mm    | WxHxD          |
| Weight               | 425g / 0.94lb   |                |

### ORDER NUMBERS

|                 |                   |                    |
|-----------------|-------------------|--------------------|
| DC/DC Converter | <b>CD5.241-L1</b> | Standard unit      |
| Accessory       | ZM1.WALL          | Wall mount bracket |
|                 | ZM11.SIDE         | Side mount bracket |

### MARKINGS

  
 Ind. Cont. Eq.  
 UL 508

  
 UL 60950-1  
 UL 61010-1

  
 EMC, ATEX

  
 Class I Div 2

  
 IECEx ATEX  
 II 3G Ex nA nC II T4 Gc

  
 Marine

## INDEX

|                                                    | Page |                                                  | Page |
|----------------------------------------------------|------|--------------------------------------------------|------|
| 1. Intended Use .....                              | 3    | 18. RoHS, REACH and Other Fulfilled Standards .. | 16   |
| 2. Installation Requirements.....                  | 3    | 19. Physical Dimensions and Weight .....         | 16   |
| 3. Input Voltage .....                             | 4    | 20. Accessories .....                            | 17   |
| 4. Soft-start and Input Inrush Current Surge ..... | 5    | 21. Application Notes.....                       | 18   |
| 5. Output .....                                    | 6    | 21.1. Peak Current Capability .....              | 18   |
| 6. Hold-up Time.....                               | 7    | 21.2. Back-feeding Loads .....                   | 18   |
| 7. Efficiency and Power Losses.....                | 8    | 21.3. Inductive and Capacitive Loads.....        | 18   |
| 8. Functional Diagram.....                         | 9    | 21.4. External Input Protection.....             | 19   |
| 9. Front Side and User Elements.....               | 9    | 21.5. Requirements for the Supplying Source..    | 19   |
| 10. Terminals and Wiring.....                      | 10   | 21.6. Parallel Use to Increase Output Power....  | 19   |
| 11. Reliability .....                              | 10   | 21.7. Parallel Use for Redundancy .....          | 19   |
| 12. EMC.....                                       | 11   | 21.8. Series Operation .....                     | 20   |
| 13. Environment .....                              | 12   | 21.9. Charging of Batteries .....                | 20   |
| 14. Protection Features .....                      | 13   | 21.10. Use in a Tightly Sealed Enclosure .....   | 20   |
| 15. Safety Features .....                          | 13   | 21.11. Mounting Orientations .....               | 21   |
| 16. Dielectric Strength .....                      | 14   |                                                  |      |
| 17. Approvals.....                                 | 15   |                                                  |      |

The information presented in this document is believed to be accurate and reliable and may change without notice.  
Some parts of this unit are patent by PULS (US patent No 091662,063, Des. 424,529, ...).

No part of this document may be reproduced or utilized in any form without permission in writing from PULS GmbH.

## TERMINOLOGY AND ABBREVIATIONS

|                                          |                                                                                                                                                                                                                     |
|------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>PE and <math>\oplus</math> symbol</b> | PE is the abbreviation for <b>Protective Earth</b> and has the same meaning as the symbol $\oplus$ .                                                                                                                |
| <b>Earth, Ground</b>                     | This document uses the term "earth" which is the same as the U.S. term "ground".                                                                                                                                    |
| <b>T.b.d.</b>                            | To be defined, value or description will follow later.                                                                                                                                                              |
| <b>DC 24V</b>                            | A figure displayed with the AC or DC before the value represents a nominal voltage with standard tolerances included.<br>E.g.: DC 12V describes a 12V battery disregarding whether it is full (13.7V) or flat (10V) |
| <b>24Vdc</b>                             | A figure with the unit (Vac) at the end is a momentary figure without any additional tolerances included.                                                                                                           |

## 1. INTENDED USE

This device is designed for installation in an enclosure and is intended for the general use such as in industrial control, office, communication, and instrumentation equipment.

Do not use this DC/DC converter in equipment where malfunction may cause severe personal injury or threaten human life.

## 2. INSTALLATION REQUIREMENTS

This device may only be installed and put into operation by qualified personnel.

This device does not contain serviceable parts. The tripping of an internal fuse (if included) is caused by an internal defect.

If damage or malfunction should occur during installation or operation, immediately turn power off and send unit to the factory for inspection.

Mount the unit on a DIN-rail so that the output terminals are located on top and input terminal on the bottom. For other mounting orientations see de-rating requirements in this document.

This device is designed for convection cooling and does not require an external fan. Do not obstruct airflow and do not cover ventilation grid (e.g. cable conduits) by more than 30%!

Keep the following installation clearances: 40mm on top, 20mm on the bottom, 5mm on the left and right sides are recommended when the device is loaded permanently with more than 50% of the rated power. Increase this clearance to 15mm in case the adjacent device is a heat source (e.g. another DC/DC converter).



**WARNING** Risk of electrical shock, fire, personal injury or death.

- Do not use the DC/DC converter without proper grounding (Protective Earth). Use the terminal on the input block for earth connection and not one of the screws on the housing.
- Turn power off before working on the device. Protect against inadvertent re-powering.
- Make sure that the wiring is correct by following all local and national codes.
- Do not modify or repair the unit.
- Do not open the unit as high voltages may present inside.
- Use caution to prevent any foreign objects from entering the housing.
- Do not use in wet locations or in areas where moisture or condensation can be expected.
- Do not touch during power-on, and immediately after power-off. Hot surface may cause burns.

The input must be powered from a SELV source (according to IEC 60950-1), a PELV source (according to IEC 62477-1) or an Isolated Secondary Circuit (according to UL 508).

### Notes for use in hazardous location areas:

The DC/DC Converter is suitable for use in Class I Division 2 Groups A, B, C, D locations and for use in Group II Category 3 (Zone 2) environments and are evaluated according to EN 60079-0 and EN 60079-15.

### WARNING EXPLOSION HAZARDS!

Substitution of components may impair suitability for this environment. Do not disconnect the unit unless power has been switched off or the area is known to be non-hazardous.

A suitable enclosure must be provided for the end product which has a minimum protection of IP54 and fulfils the requirements of the EN 60079-15.

### 3. INPUT VOLTAGE

|                                         |      |                  |                                                                                     |
|-----------------------------------------|------|------------------|-------------------------------------------------------------------------------------|
| Input voltage                           | nom. | DC 24V           |                                                                                     |
| Input voltage range                     |      | 14.4-32.4Vdc     | full specified                                                                      |
|                                         | max. | 36.0Vdc          | absolute maximum continuous input voltage with no damage to the DC/DC converter     |
| Allowed voltage between input and earth | max. | 60Vdc or 42.2Vac | in case the output voltage is not grounded.                                         |
| Allowed input ripple voltage            | max. | 5Vpp             | 47Hz-500Hz, the momentary input voltage must always be within the specified limits. |
| Turn-on voltage                         | typ. | 17.5Vdc          | steady-state value, see Fig. 3-1                                                    |
| Shut-down voltage                       | typ. | 14.0Vdc          | steady-state value, see Fig. 3-1                                                    |
|                                         | typ. | 35.0Vdc          | steady-state value, see Fig. 3-1                                                    |
| Input current                           | typ. | 4.25A            | at 24Vdc input and output 24V, 3.8A, see Fig. 3-3                                   |
| Start-up delay                          | typ. | 290ms            | see Fig. 3-2                                                                        |
| Rise time                               | typ. | 520ms            | 0mF, 24V, resistive load 3.8A, see Fig. 3-2                                         |
|                                         | typ. | 610ms            | 3.8mF, 24V, resistive load 3.8A, see Fig. 3-2                                       |
| Turn-on overshoot                       | max. | 500mV            | see Fig. 3-1                                                                        |
| Input capacitance                       | typ. | 3 000µF          | external capacitors on the input voltage bus are allowed without any limitations.   |

Fig. 3-1 Input voltage range

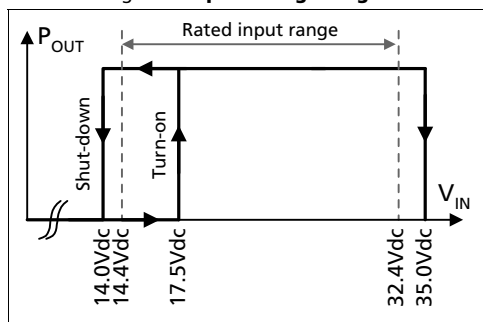


Fig. 3-2 Turn-on behavior, definitions


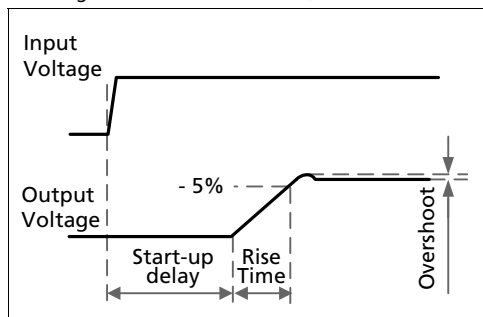


Fig. 3-3 Input current vs. output load

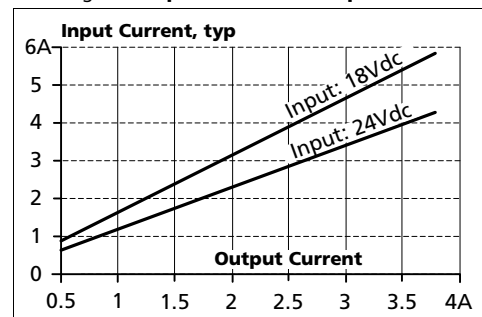

## 4. SOFT-START AND INPUT INRUSH CURRENT SURGE


### Inrush current limitation

An active inrush limitation circuit (inrush limiting resistor which is bypassed by a relay contact) limits the input inrush current after turn-on of the input voltage.

The charging current into EMI suppression capacitors is disregarded in the first microseconds after switch-on.

|                |      |                      |                              |
|----------------|------|----------------------|------------------------------|
| Inrush current | max. | 1.6A <sub>peak</sub> | -25°C to +70°C, input: 24Vdc |
|                | typ. | 1.2A <sub>peak</sub> | -25°C to +70°C, input: 24Vdc |
| Inrush energy  | typ. | negligible           | -25°C to +70°C, input: 24Vdc |

Fig. 4-1 Input inrush current, typical behavior

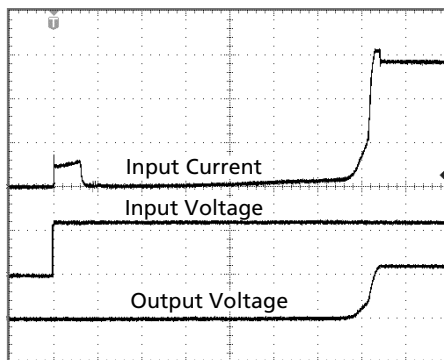


Input: 24Vdc  
Output: 24V, 3.8A, constant current load  
Ambient: 25°C

Upper curve: Input current 2A / DIV  
Middle curve: Input voltage 20V / DIV  
Lower curve: Output voltage 20V / DIV  
Time basis: 100ms / DIV

### Soft-start function:

After the DC/DC converter is turned on, the internal output current rises slowly to its nominal value. This method charges the output capacitors (internal and external capacitors) slowly and avoids high input currents during turn-on. High input currents can produce a high voltage drop on the input wiring (especially with long and thin cables) which reduces the terminal voltage on the DC/DC converter. If the terminal voltage is below the shut-down voltage, the DC/DC converter will turn-off and will make a new start-up attempt. This effect is avoided with the integrated soft-start function. Please note, that this function increases the rise time of the output voltage by a small amount.

Fig. 4-2 Soft-start behavior

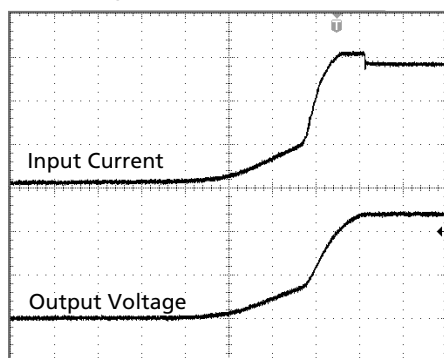

Input: 24Vdc  
Output: 24V, 3.8A, constant current load  
Ambient: 25°C  
No additional external output capacitors

Upper curve: Input current 2A / DIV  
Lower curve: Output voltage 10V / DIV  
Time basis: 20ms / DIV

## 5. OUTPUT

|                          |      |         |                                                     |
|--------------------------|------|---------|-----------------------------------------------------|
| Output voltage           | nom. | 24V     |                                                     |
| Adjustment range         | min. | -       | not adjustable                                      |
| Factory setting          |      | 24.1V   | ±0.2%, at full load, cold unit                      |
| Line regulation          | max. | 25mV    | Input voltage variations between 18 to 32.4Vdc      |
| Load regulation          | max. | 100mV   | static value, 0A → 3.8A                             |
| Ripple and noise voltage | max. | 50mVpp  | 20Hz to 20MHz, 50Ohm                                |
| Output current           | nom. | 3.8A    | see Fig. 5-1                                        |
| Output power             | nom. | 92W     |                                                     |
| Short-circuit current    | min. | 3A      | continuous current, short circuit impedance 200mOhm |
|                          | max. | 6A      | continuous current, short circuit impedance 200mOhm |
| Output capacitance       | typ. | 2 200µF |                                                     |

Fig. 5-1 **Output voltage vs. output current, typ.**


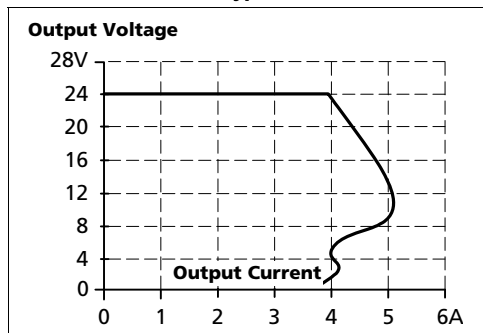


Fig. 5-2 **Current limitation vs. input voltage, (23V constant voltage load), typ.**

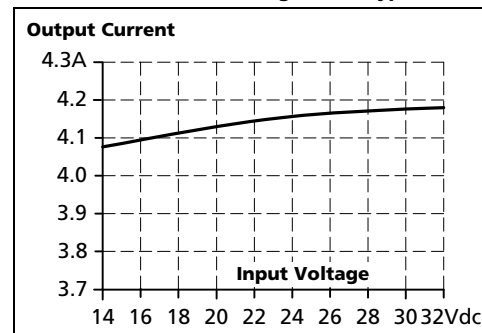

### Peak current capability (up to several milliseconds)

The DC/DC converter can deliver a peak current, which is higher than the specified short term current. This helps to start current demanding loads or to safely operate subsequent circuit breakers.

The extra current is supplied by the output capacitors inside the DC/DC converter. During this event, the capacitors will be discharged and causes a voltage dip on the output. Detailed curves can be found in chapter 21.1.

|                           |      |                   |                                  |
|---------------------------|------|-------------------|----------------------------------|
| Peak current voltage dips | typ. | from 24V to 16V   | at 7.6A for 50ms, resistive load |
|                           | typ. | from 24V to 12.5V | at 15.2A for 2ms, resistive load |
|                           | typ. | from 24V to 8.5V  | at 15.2A for 5ms, resistive load |

## 6. HOLD-UP TIME

The input side of the DC/DC converter is equipped with a bulk capacitor which keeps the output voltage alive for a certain period of time when the input voltage dips or is removed. The bulk capacitor can be discharged by loading the DC/DC converter on the output side or through a load which is parallel to the input. There is no protection in the DC/DC converter which prevents current from flowing back to the input terminals. If prevention is needed, an external diode should be used.

|              |      |        |                                                |
|--------------|------|--------|------------------------------------------------|
| Hold-up Time | typ. | 13.8ms | input 24Vdc, output: 24Vdc, 1.9A, see Fig. 6-1 |
|              | typ. | 7ms    | input 24Vdc, output: 24Vdc, 3.8A, see Fig. 6-1 |

Fig. 6-1 **Hold-up time vs. input voltage**

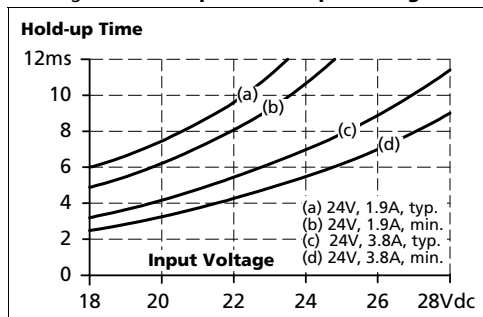


Fig. 6-2 **Shut-down test setup**


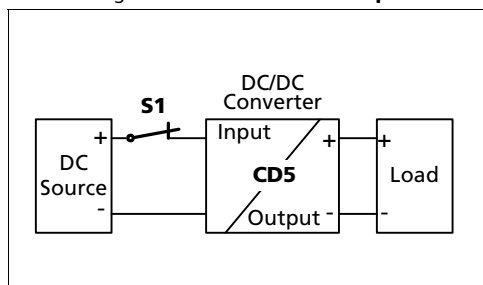


Fig. 6-3 **Shut-down behavior, definitions**

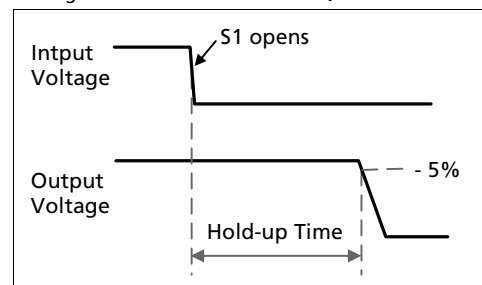

Note: At no load, the hold-up time can be up to several seconds. The green DC-ok lamp is also on during this time.

### 7. EFFICIENCY AND POWER LOSSES

| Input 24Vdc  |      |       |                   |
|--------------|------|-------|-------------------|
| Efficiency   | typ. | 90.5% | at 24V, 3.8A      |
| Power losses | typ. | 0.7W  | at no output load |
|              | typ. | 5.5W  | at 24V, 1.9A      |
|              | typ. | 9.7W  | at 24V, 3.8A      |

Fig. 7-1 Efficiency vs. output current at 24V, typ.

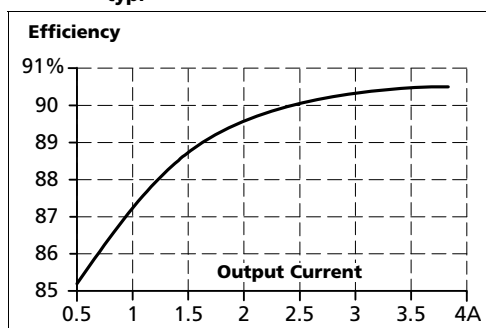


Fig. 7-2 Losses vs. output current at 24V, typ.

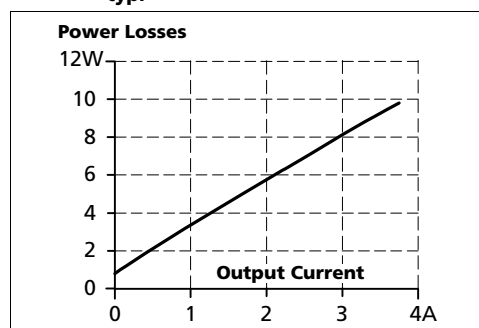


Fig. 7-3 Efficiency vs. input voltage at 24V, 3.8A, typ.



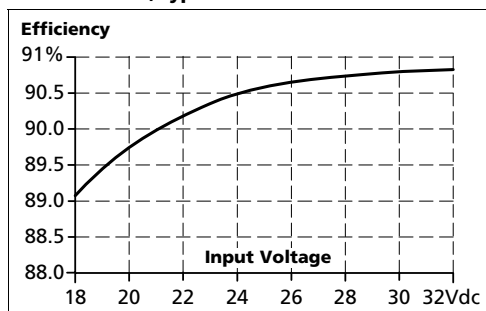


Fig. 7-4 Losses vs. input voltage at 24V, 3.8A, typ.



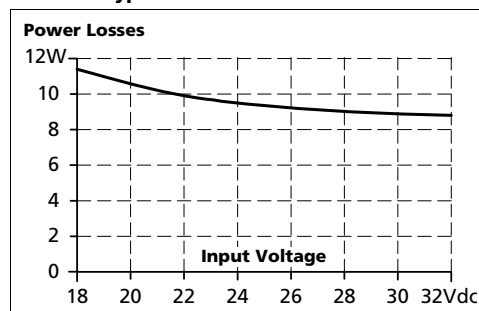

### 8. FUNCTIONAL DIAGRAM

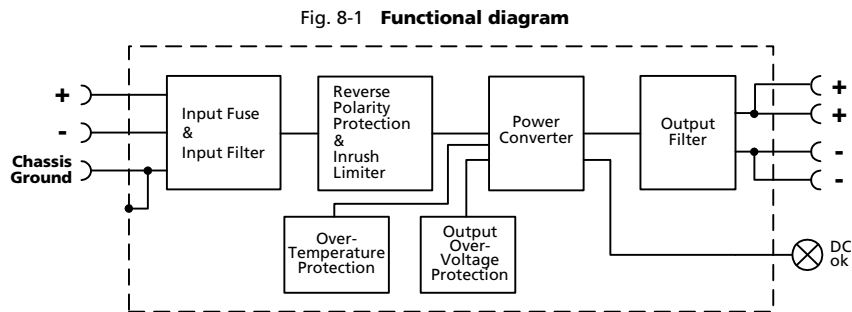

### 9. FRONT SIDE AND USER ELEMENTS

Fig. 9-1 Front side



- A** Input terminals  
Screw terminals  
+ Positive input  
- Negative (return) input  
Chassis ground: can be used to bond the housing to PE  
Ground this terminal to minimize high-frequency emissions.
- B** Output terminals  
Screw terminals, dual terminals per pole, both pins are equal  
+ Positive output  
- Negative (return) output Screw terminals
- C** DC-OK LED (green)  
On when the voltage on the output terminals is > 21V

## 10. TERMINALS AND WIRING

|                       | <b>Input</b>           | <b>Output</b>          |
|-----------------------|------------------------|------------------------|
| Type                  | spring-clamp terminals | spring-clamp terminals |
| Solid wire            | max. 6mm <sup>2</sup>  | max. 6mm <sup>2</sup>  |
| Stranded wire         | max. 4mm <sup>2</sup>  | max. 4mm <sup>2</sup>  |
| American Wire Gauge   | 20-10 AWG              | 20-10 AWG              |
| Wire stripping length | 10mm / 0.4inch         | 10mm / 0.4inch         |

### Instructions:

- The external circuitry of all terminals must meet the safety requirements stipulated by IEC/EN/UL 60950-1: SELV.
- Use appropriate copper cables that are designed for an operating temperature of:  
60°C for ambient up to 45°C and  
75°C for ambient up to 60°C minimum  
90°C for ambient up to 70°C minimum.
- Follow national installation codes and installation regulations!
- Ensure that all strands of a stranded wire enter the terminal connection!
- Screws of unused terminal compartments should be securely tightened.
- Screws of unused terminal compartments should be securely tightened.
- Ferrules are allowed.
- Do not connect or disconnect the wires from the terminals below -25°C (-13°F).

## 11. RELIABILITY

|                              | <b>Input 24Vdc</b> |                                           |
|------------------------------|--------------------|-------------------------------------------|
| Lifetime expectancy *)       | 228 000h           | at 24V, 1.9A and 40°C                     |
|                              | 134 000h           | at 24V, 3.8A and 40°C                     |
|                              | 378 000h           | at 24V, 3.8A and 25°C                     |
| MTBF **) SN 29500, IEC 61709 | 1 487 000h         | at 24V, 3.8A and 40°C                     |
|                              | 2 534 000h         | at 24V, 3.8A and 25°C                     |
| MTBF **) MIL HDBK 217F       | 665 000h           | at 24V, 3.8A and 40°C; Ground Benign GB40 |
|                              | 937 000h           | at 24V, 3.8A and 25°C; Ground Benign GB25 |

\*) The **Lifetime expectancy** shown in the table indicates the minimum operating hours (service life) and is determined by the lifetime expectancy of the built-in electrolytic capacitors. Lifetime expectancy is specified in operational hours and is calculated according to the capacitor's manufacturer specification. The prediction model allows only a calculation of up to 15 years from date of shipment.

\*\*) **MTBF** stands for **Mean Time Between Failure**, which is calculated according to statistical device failures, and indicates reliability of a device. It is the statistical representation of the likelihood of a unit to fail and does not necessarily represent the life of a product. The MTBF figure is a statistical representation of the likelihood of a device to fail. A MTBF figure of e.g. 1 000 000h means that statistically one unit will fail every 100 hours if 10 000 units are installed in the field. However, it can not be determined if the failed unit has been running for 50 000h or only for 100h.

## 12. EMC

The DC/DC converter is suitable for applications in industrial environment as well as in residential, commercial and light industry environment without any restrictions.

|                          |                                                  |                        |       |             |
|--------------------------|--------------------------------------------------|------------------------|-------|-------------|
| <b>EMC Immunity</b>      | Generic standards: EN 61000-6-1 and EN 61000-6-2 |                        |       |             |
| Electrostatic discharge  | EN 61000-4-2                                     | Contact discharge      | 8kV   | Criterion A |
|                          |                                                  | Air discharge          | 15kV  | Criterion A |
| Electromagnetic RF field | EN 61000-4-3                                     | 80MHz-2.7GHz           | 10V/m | Criterion A |
| Fast transients (Burst)  | EN 61000-4-4                                     | Input lines            | 4kV   | Criterion A |
|                          |                                                  | Output lines           | 2kV   | Criterion A |
| Surge voltage on input   | EN 61000-4-5                                     | + → -                  | 1kV   | Criterion A |
|                          |                                                  | +/- → chassis ground   | 2kV   | Criterion A |
| Surge voltage on output  | EN 61000-4-5                                     | + → -                  | 500V  | Criterion A |
|                          |                                                  | + / - → chassis ground | 1kV   | Criterion A |
| Conducted disturbance    | EN 61000-4-6                                     | 0.15-80MHz             | 10V   | Criterion A |

**Criteria:**

**A:** DC/DC converter shows normal operation behavior within the defined limits.

**C:** Temporary loss of function is possible. DC/DC converter may shut-down and restarts by itself. No damage or hazards for the DC/DC converter will occur.

|                     |                                                  |                                                     |  |
|---------------------|--------------------------------------------------|-----------------------------------------------------|--|
| <b>EMC Emission</b> | Generic standards: EN 61000-6-3 and EN 61000-6-4 |                                                     |  |
| Conducted emission  | IEC/CISPR 16-1-2, IEC/CISPR 16-2-1               | Class B, input lines<br>(Limits for DC power ports) |  |
| Radiated emission   | EN 55011, EN 55022                               | Class B                                             |  |

This device complies with FCC Part 15 rules.

Operation is subjected to following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

### Switching frequency

Variable between 90kHz and 135kHz depending on load and input voltage  
(output current > 0.5A)

### 13. ENVIRONMENT

|                            |                                                                                                                  |                                                                               |
|----------------------------|------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| Operational temperature *) | -25°C to +70°C (-13°F to 158°F)                                                                                  | see Fig. 13-1                                                                 |
| Storage temperature        | -40 to +85°C (-40°F to 185°F)                                                                                    | for storage and transportation                                                |
| Humidity **)               | 5 to 95% r.H.                                                                                                    | IEC 60068-2-30                                                                |
| Vibration sinusoidal ***)  | 2-17.8Hz: $\pm 1.6\text{mm}$ ; 17.8-500Hz: 2g<br>2 hours / axis                                                  | IEC 60068-2-6                                                                 |
| Shock ***)                 | 30g 6ms, 20g 11ms<br>3 bumps / direction, 18 bumps in total                                                      | IEC 60068-2-27                                                                |
| Altitude                   | 0 to 6000m (0 to 20 000ft)                                                                                       | Reduce output power or ambient temperature<br>above 2000m sea level.          |
| Altitude de-rating         | 5.8W/1000m or 5°C/1000m                                                                                          | above 2000m (6500ft), see Fig. 13-2                                           |
| Over-voltage category      | III<br>II                                                                                                        | IEC 62477-1, EN 50178, altitudes up to 2000m<br>Altitudes from 2000m to 6000m |
| Degree of pollution        | 2                                                                                                                | IEC 62477-1, EN 50178, not conductive                                         |
| LABS compatibility         | The unit does not release any silicone or other LABS-critical substances and is suitable for use in paint shops. |                                                                               |

\*) Operational temperature is the same as the ambient temperature and is defined as the air temperature 2cm below the unit.

\*\*) Do not energize while condensation is present

\*\*\*) Tested in combination with DIN-Rails according to EN 60715 with a height of 15mm and a thickness of 1.3mm and standard mounting orientation.

Fig. 13-1 Output current vs. ambient temp.


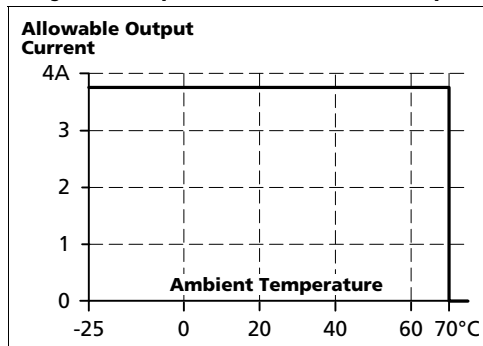


Fig. 13-2 Output current vs. altitude at 24V

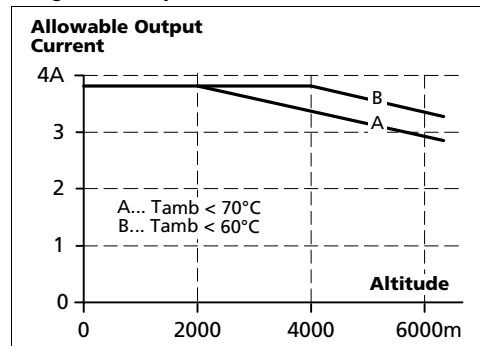

## 14. PROTECTION FEATURES

|                                   |                                                                          |                                                                                                                                                                 |
|-----------------------------------|--------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Output protection                 | Electronically protected against overload, no-load and short-circuits *) |                                                                                                                                                                 |
| Output over-voltage protection    | typ. 31Vdc<br>max. 32Vdc                                                 | in case of an internal power supply defect, a redundant circuit limits the maximum output voltage. The output shuts down and automatically attempts to restart. |
| Reverse input polarity protection | Included                                                                 | unit does not start when input voltage is reversed                                                                                                              |
| Output over-current protection    | electronically limited *)                                                | see Fig. 5-1                                                                                                                                                    |
| Degree of protection              | IP 20                                                                    | EN/IEC 60529                                                                                                                                                    |
| Penetration protection            | > 3.5mm                                                                  | e.g. screws, small parts                                                                                                                                        |
| Over-temperature protection       | yes                                                                      | output shut-down with automatic restart                                                                                                                         |
| Input transient protection        | MOV                                                                      | Metal Oxide Varistor                                                                                                                                            |
| Internal input fuse               | included                                                                 | not user replaceable                                                                                                                                            |

\*) In case of a protection event, audible noise may occur.

## 15. SAFETY FEATURES

|                                  |                                                                                                                                                                                                                                                  |                                                                                                                                          |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Classification of output voltage | SELV<br>PELV                                                                                                                                                                                                                                     | IEC/EN 60950-1<br>IEC/EN 60204-1, EN 50178, IEC 62477-1, IEC 60364-4-41                                                                  |
| Class of protection              | III                                                                                                                                                                                                                                              | PE (Protective Earth) connection not required. A connection of the "Chassis Ground" pin to earth is recommended for best EMI performance |
| Isolation resistance             | > 5MΩ                                                                                                                                                                                                                                            | input to output, 500Vdc                                                                                                                  |
| PE resistance                    | < 0.1Ω                                                                                                                                                                                                                                           | between housing and Chassis Ground terminal                                                                                              |
| Touch current (leakage current)  | The leakage current which is produced by the DC/DC converter itself depends on the input voltage ripple and need to be investigated in the final application.<br>For a smooth DC input voltage, the produced leakage current is less than 100μA. |                                                                                                                                          |


\*) provided, that the input voltage meets the requirements of chapter 2.

## 16. DIELECTRIC STRENGTH

The output voltage is floating and has no ohmic connection to the ground.

Type and factory tests are conducted by the manufacturer. Field tests may be conducted in the field using the appropriate test equipment which applies the voltage with a slow ramp (2s up and 2s down). Connect all phase-terminals together as well as all output poles before conducting the test. When testing, set the cut-off current settings to the value in the table below.

Fig. 16-1 Dielectric strength

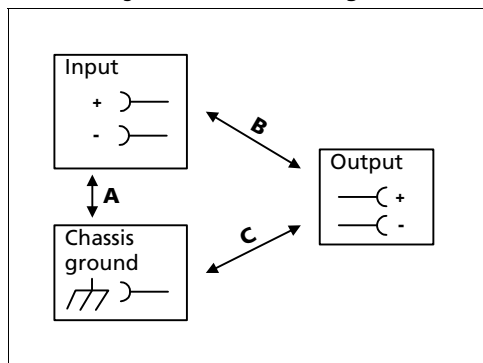

|                         |     | <b>A</b> | <b>B</b> | <b>C</b> |
|-------------------------|-----|----------|----------|----------|
| Type test               | 60s | 1500Vac  | 1500Vac  | 500Vac   |
| Factory test            | 5s  | 1500Vac  | 1500Vac  | 500Vac   |
| Field test              | 5s  | 1000Vac  | 1000Vac  | 500Vac   |
| Cut-off current setting |     | > 30mA   | > 30mA   | > 12mA   |

To fulfill the PELV requirements according to EN60204-1 § 6.4.1, we recommend that either the + pole, the – pole or any other part of the output circuit shall be connected to the protective earth system. This helps to avoid situations in which a load starts unexpectedly or can not be switched off when unnoticed earth faults occur.

## 17. APPROVALS

|                                           |                                                                                                                |                                                                                                                                                                     |
|-------------------------------------------|----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EC Declaration of Conformity              |                               | The CE mark indicates conformance with the<br>- EMC directive and the<br>- ATEX directive.                                                                          |
| IEC 60950-1<br>2 <sup>nd</sup> Edition    |                               | CB Scheme,<br>Information Technology Equipment                                                                                                                      |
| IEC 61010-1                               |                               | CB Scheme,<br>Electrical Equipment for Measurement, Control and<br>Laboratory Use                                                                                   |
| UL 508                                    |                               | LISTED for use as Industrial Control Equipment;<br>U.S.A. (UL 508) and Canada (C22.2 No. 107-1-01);<br>E-File: E198865                                              |
| UL 60950-1                                |                               | RECOGNIZED for the use as Information Technology<br>Equipment, Level 3; U.S.A. (UL 60950-1) and Canada (C22.2<br>No. 60950-1); E-File: E137006                      |
| NEC Class 2                               | NEC CLASS 2                                                                                                    | According to NEC (National Electrical Code) Article 725-41 (4).<br>Listed as Limited Power Source (LPS) in the UL 60950-1 UL<br>report.                             |
| UL 61010-1                                |                             | RECOGNIZED for use in Electrical Equipment for<br>Measurement, Control and Laboratory Use;<br>E-File: E326782                                                       |
| EN 60079-0, EN 60079-15<br>ATEX           | <br>II 3G Ex nA nC II T4 Gc | Approval for use in hazardous locations Zone 2 Category 3G.<br>Number of ATEX certificate: EPS 08 ATEX 1 142 X<br>The device must be built-in in an IP54 enclosure. |
| IEC 60079-0, IEC 60079-15                 |                             | Suitable for use in Class 1 Zone 2 Groups Ila, IIb and IIc<br>locations. Number of IECEx certificate: IECEx EPS 14.0001X                                            |
| ANSI / ISA 12.12.01-2007<br>Class I Div 2 |                             | Recognized for use in Hazardous Location Class I Div 2 T4<br>Groups A,B,C,D systems; U.S.A. (ANSI / ISA 12.12.01) and<br>Canada (C22.2 No. 213-M1987)               |
| Marine                                    |                             | GL (Germanischer Lloyd) classified and<br>ABS (American Bureau for Shipping) PDA<br>Environmental category: C, EMC2<br>Marine and offshore applications             |
| EAC TR Registration                       |                             | Registration for the Eurasian Customs Union market<br>(Russia, Kazakhstan, Belarus)                                                                                 |

## 18. RoHS, REACH AND OTHER FULFILLED STANDARDS

RoHS Directive

**RoHS** ✓

Directive 2011/65/EU of the European Parliament and the Council of June 8<sup>th</sup>, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

REACH Directive

**REACH** ✓

Directive 1907/2006/EU of the European Parliament and the Council of June 1<sup>st</sup>, 2007 regarding the Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)

## 19. PHYSICAL DIMENSIONS AND WEIGHT

Weight 425g / 0.94lb

DIN-Rail Use 35mm DIN-rails according to EN 60715 or EN 50022 with a height of 7.5 or 15mm. The DIN-rail height must be added to the unit depth (102mm) to calculate the total required installation depth.

Installation Clearances See chapter 2

Fig. 19-1 **Front view**


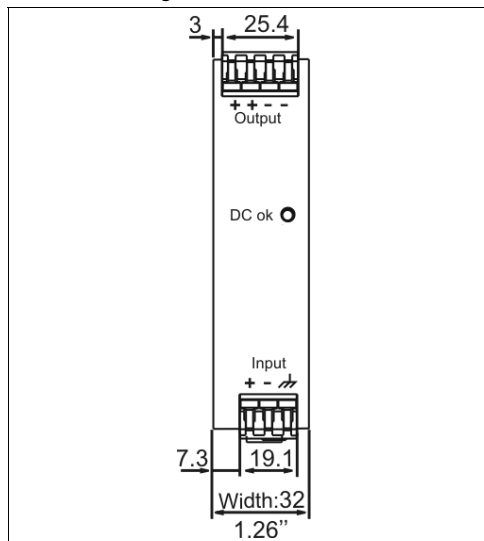


Fig. 19-2 **Side view**



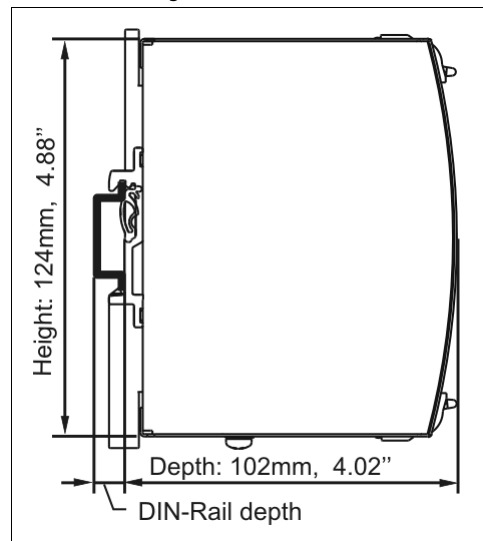

## 20. ACCESSORIES

### ZM1.WALL Wall mounting bracket

This bracket is used to mount specific Dimension units onto a flat surface without utilizing a DIN-Rail. The two aluminum brackets and the black plastic slider of the unit have to be removed, so that the two steel brackets can be mounted.

Fig. 20-1 ZM1.WALL Wall mounting bracket


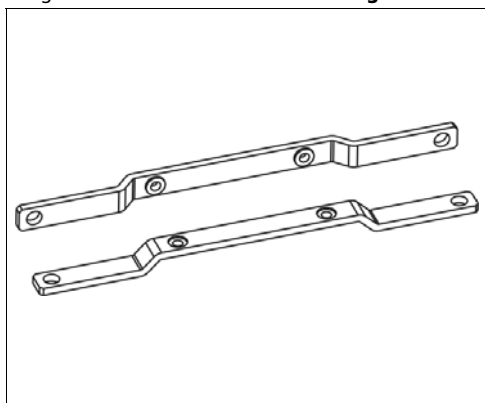


Fig. 20-2 Assembled wall mounting bracket \*)

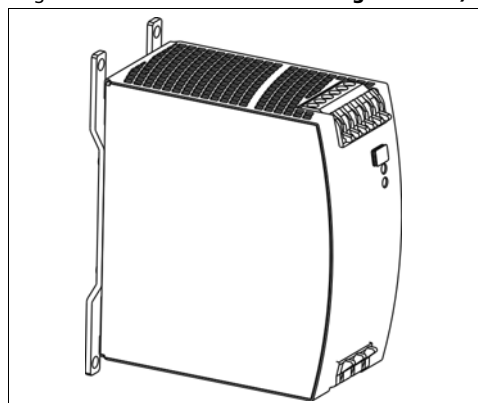

\*) Picture of the DC/DC converter is for representation only

### ZM11.SIDE Side mounting bracket

This bracket is used to mount Dimension units sideways with or without utilizing a DIN-Rail. The two aluminum brackets and the black plastic slider of the unit have to be detached, so that the steel brackets can be mounted. For sideways DIN-rail mounting, the removed aluminum brackets and the black plastic slider need to be mounted on the steel bracket.

Fig. 20-3  
ZM11.SIDE Side mounting bracket \*)


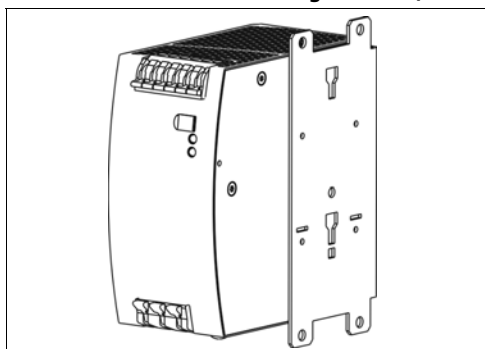


Fig. 20-4  
Side mounting with DIN-rail brackets \*)

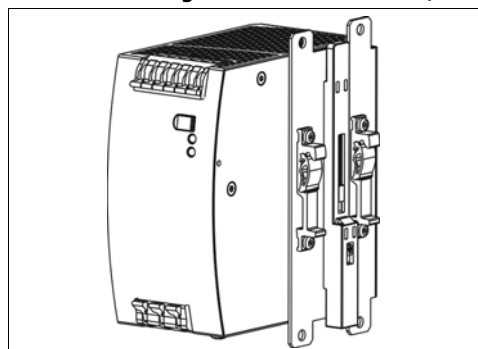

\*) Picture of the DC/DC converter is for representation only

## 21. APPLICATION NOTES


### 21.1. PEAK CURRENT CAPABILITY

Solenoids, contactors and pneumatic modules often have a steady state coil and a pick-up coil. The inrush current demand of the pick-up coil is several times higher than the steady-state current and usually exceeds the nominal output current (including the PowerBoost). The same situation applies, when starting a capacitive load.

Branch circuits are often protected with circuit breakers or fuses. In case of a short or an overload in the branch circuit, the fuse needs a certain amount of over-current to trip or to blow. The peak current capability ensures the safe operation of subsequent circuit breakers.


Assuming the input voltage is turned on before such an event, the built-in large sized output capacitors inside the DC/DC converter can deliver extra current. Discharging this capacitor causes a voltage dip on the output. The following two examples show typical voltage dips:

Fig. 21-1 **Peak loading with 2x the nominal current for 50ms, typ.**

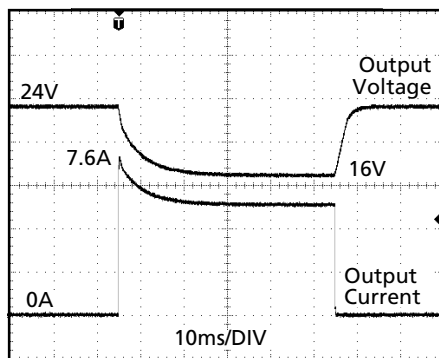

Peak load 7.6A (resistive load) for 50ms  
Output voltage dips from 24V to 16V.

Fig. 21-2 **Peak loading with 5x the nominal current for 5ms, typ.**

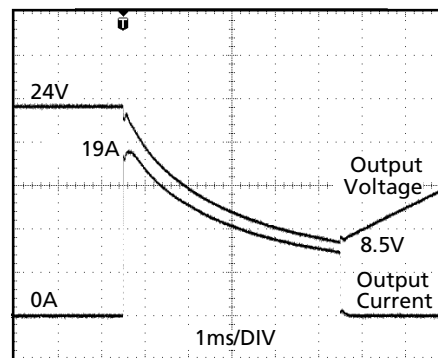

Peak load 19A (resistive load) for 5ms  
Output voltage dips from 24V to 8.5V.

### 21.2. BACK-FEEDING LOADS

Loads such as decelerating motors and inductors can feed voltage back to the DC/DC converter. This feature is also called return voltage immunity or resistance against Back- E.M.F. (Electro Magnetic Force).

This DC/DC converter is resistant and does not show malfunctioning when a load feeds back voltage to the DC/DC converter. It does not matter, whether the DC/DC converter is on or off.

The maximum allowed feed-back-voltage is 30Vdc. The absorbing energy can be calculated according to the built-in large sized output capacitance which is specified in chapter 5.

### 21.3. INDUCTIVE AND CAPACITIVE LOADS

The unit is designed to supply any kind of loads, including unlimited capacitive and inductive loads.

## 21.4. EXTERNAL INPUT PROTECTION


The unit is tested and approved for branch circuits up to 50A. An external protection is only required, if the supplying branch has an ampacity greater than this. Check also local codes and local requirements. In some countries local regulations might apply.

If an external fuse is necessary or utilized, minimum requirements need to be considered to avoid nuisance tripping of the circuit breaker. A minimum value of 10A B- or 8A C-Characteristic breaker should be used.

## 21.5. REQUIREMENTS FOR THE SUPPLYING SOURCE

In certain circumstances, the input filter of the DC/DC converter can show a resonant effect which is caused by the supplying network. Especially when additional external input filters are utilized, a superimposed AC voltage can be generated on the input terminals of the DC/DC converter which might cause a malfunction of the unit. Therefore, additional input filters are not recommended. To avoid the resonant effects, the minimal resistance of the supplying network which depends on the inductance of the input network, shall be above the boundary curve in Fig. 21-3.

Fig. 21-3 **External input filter requirements to avoid filter instabilities**

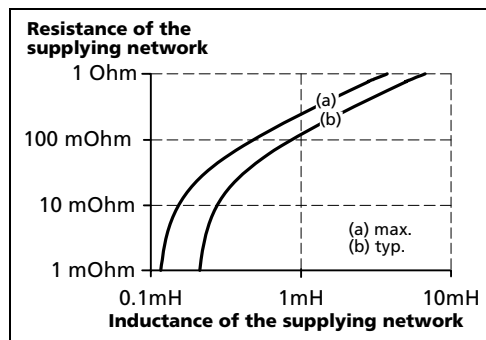

## 21.6. PARALLEL USE TO INCREASE OUTPUT POWER

This DC/DC-converter is designed to meet the NEC Class 2 requirements. Do not use in parallel to increase the output current. This would increase the output current and violates the NEC Class 2 limitations. Use CD5.241 or CD5.241-S1.

## 21.7. PARALLEL USE FOR REDUNDANCY

This DC/DC-converter is designed to meet the NEC Class 2 requirements. Do not use in parallel for redundancy. This would increase the output current and violates the NEC Class 2 limitations. Use CD5.241 or CD5.241-S1.

## 21.8. SERIES OPERATION

This DC/DC-converter is designed to meet the NEC Class 2 requirements. Do not use in series to increase the output voltage. This would increase the output power for the NEC Class 2 circuit and violates the NEC Class 2 limitations. Use CD5.241 or CD5.241-S1.

## 21.9. CHARGING OF BATTERIES

This DC/DC converter can not be used to charge batteries. The output voltage is not adjustable.

## 21.10. USE IN A TIGHTLY SEALED ENCLOSURE

When the DC/DC converter is installed in a tightly sealed enclosure, the temperature inside the enclosure will be higher than outside. In such situations, the inside temperature defines the ambient temperature for the DC/DC converter.

The following measurement results can be used as a reference to estimate the temperature rise inside the enclosure.

The DC/DC converter is placed in the middle of the box, no other heat producing items are inside the box

|                                |                                                                                        |
|--------------------------------|----------------------------------------------------------------------------------------|
| Enclosure:                     | Rittal Typ IP66 Box PK 9516 100, plastic, 110x180x165mm                                |
| Load:                          | 24V, 3A; (=80%) load is placed outside the box                                         |
| Input:                         | 24Vdc                                                                                  |
| Temperature inside enclosure:  | 37.7°C (in the middle of the right side of the DC/DC converter with a distance of 2cm) |
| Temperature outside enclosure: | 22.2°C                                                                                 |
| Temperature rise:              | 15.5K                                                                                  |

### 21.11. MOUNTING ORIENTATIONS

Mounting orientations other than input terminals on the bottom and output on the top require a reduction in continuous output power or a limitation in the max. allowed ambient temperature. The amount of reduction influences the lifetime expectancy of the DC/DC converter. Therefore, two different derating curves for continuous operation can be found below:

**Curve A1** Recommended output current.

**Curve A2** Max allowed output current (results in approximately half the lifetime expectancy of A1).

Fig. 21-4  
**Mounting Orientation A**  
(Standard orientation)

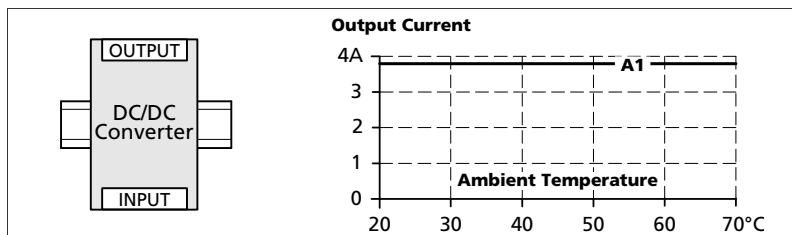


Fig. 21-5  
**Mounting Orientation B**  
(Upside down)

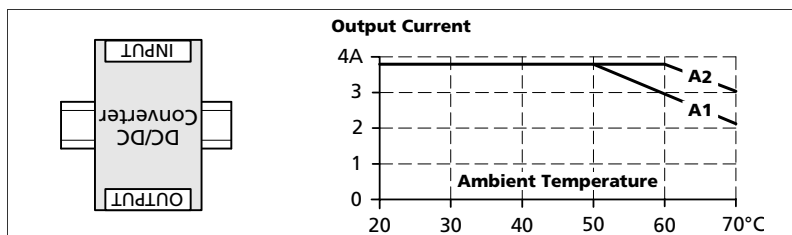


Fig. 21-6  
**Mounting Orientation C**  
(Table-top mounting)

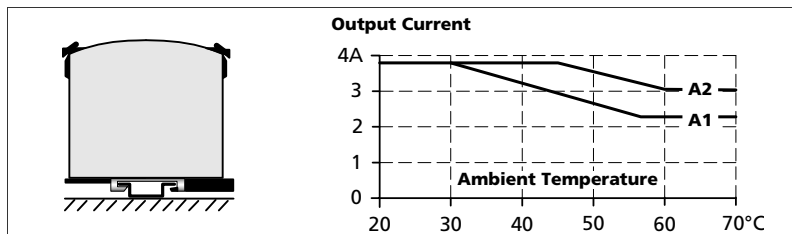


Fig. 21-7  
**Mounting Orientation D**  
(Horizontal cw)

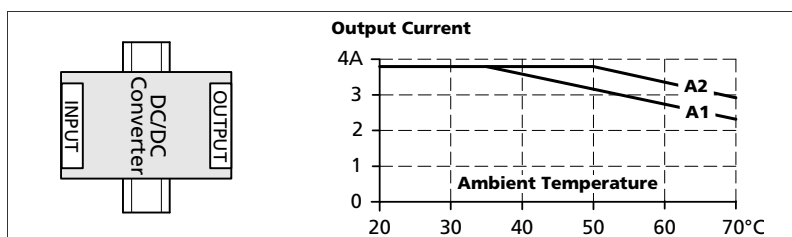


Fig. 21-8  
**Mounting Orientation E**  
(Horizontal ccw)

