OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

NAFSA - ER SERIES

ER15/C
ER15/C



- Single acting, spring or load return
- Up to class F winding (155°C)
- Duty cycle from 0 to 100%
- Up to 234N force
- Customer specific version available

PRODUCT DESCRIPTION

The ER series of electromagnets are a single acting solenoid.

When an electrical connection is made to to coil, the plunger moves through the magnetic field and pushes the shaft along its designated stroke.

Upon removing the electrical connection, the shaft is retracted to its rest position using either a mechanical spring or the load applied.

Many different standard versions are available (please see catalogue PDF below) and application specific designs can be provided for larger volume requirements.

TECHNICAL DATA


Absorbed power @ 20°C, 100% duty	3 W
Absorbed power @ 20°C, 15% duty	20 W
Absorbed power @ 20°C, 25% duty	12 W
Absorbed power @ 20°C, 40% duty	75 W
Absorbed power @ 20°C, 5% duty	60 W
Beginning of stroke force at 100% duty	3 N
Beginning of stroke force at 15% duty	1 N
Beginning of stroke force at 25% duty	8 N
Beginning of stroke force at 40% duty	5 N
Beginning of stroke force at 5% duty	25 N
End of stroke force at 100% duty	49 N
End of stroke force at 15% duty	122 N
End of stroke force at 25% duty	98 N
End of stroke force at 40% duty	79 N
End of stroke force at 5% duty	165 N

Function	pull/push
Insulation class	B (130°C)
IP class	IP00
Spring return	No
Total weight	39 g
Voltage ac max	230 V
Voltage ac min	110 V
Voltage dc max	205 V
Voltage dc min	6 V

Duty-cycle ED%	Standard voltages									Under demand voltages			
	VDC							VAC		VDC		VAC	
	6	12	24	48	100	125	205	110	230	Min	Max	Min	Max
100%	o	o	o	o	x	x	x	x	x	3	55	x	x
40%	o	o	o	o	x	x	x	x	x	3	85	x	x
25%	o	o	o	o	o	x	x	x	x	3	105	x	x
15%	o	o	o	o	o	o	x	x	x	6	135	x	x
5%	o	o	o	o	o	o	o	x	x	6	230	x	x

Layout: o = Available ; x = Unavailable

Force-stroke curve

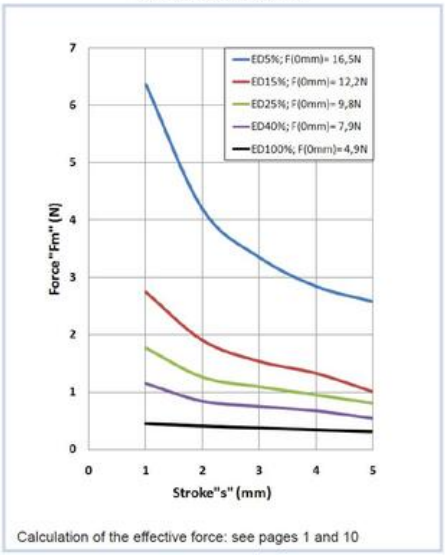

Calculation of the effective force: see pages 1 and 10

Solenoid under voltage

