OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

NAFSA - ER SERIES

ER50-15/C
ER50-15/C



- Single acting, spring or load return
- Up to class F winding (155°C)
- Duty cycle from 0 to 100%
- Up to 234N force
- Customer specific version available

PRODUCT DESCRIPTION

The ER series of electromagnets are a single acting solenoid.

When an electrical connection is made to to coil, the plunger moves through the magnetic field and pushes the shaft along its designated stroke.

Upon removing the electrical connection, the shaft is retracted to its rest position using either a mechanical spring or the load applied.


Many different standard versions are available (please see catalogue PDF below) and application specific designs can be provided for larger volume requirements.

TECHNICAL DATA

Absorbed power @ 20°C, 100% duty	14 W
Absorbed power @ 20°C, 15% duty	93 W
Absorbed power @ 20°C, 25% duty	56 W
Absorbed power @ 20°C, 40% duty	35 W
Absorbed power @ 20°C, 5% duty	280 W
Beginning of stroke force at 100% duty	67 N
Beginning of stroke force at 15% duty	23 N
Beginning of stroke force at 25% duty	16 N
Beginning of stroke force at 40% duty	13 N
Beginning of stroke force at 5% duty	37 N
End of stroke force at 100% duty	225 N
End of stroke force at 15% duty	68 N
End of stroke force at 25% duty	527 N
End of stroke force at 40% duty	41 N
End of stroke force at 5% duty	99 N

Function	pull/push
Insulation class	B (130°C)
IP class	IP00
Spring return	Yes
Stroke	15 mm
Total weight	365 g
Voltage ac max	230 V
Voltage ac min	110 V
Voltage dc max	205 V
Voltage dc min	6 V

Force stroke curve

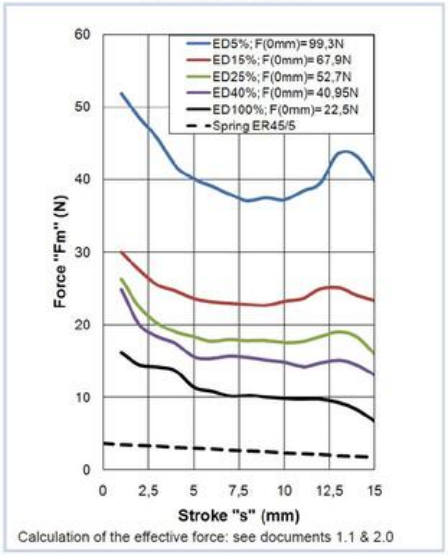

Calculation of the effective force: see documents 1.1 & 2.0

Duty-cycle ED%	Standard voltages									Under demand voltages			
	VDC							VAC		VDC		VAC	
	6	12	24	48	100	125	205	110	230	Min	Max	Min	Max
100%	o	o	o	o	o	o	o	o	o	6	230	41	230
40%	x	o	o	o	o	o	o	o	o	9	230	100	230
25%	x	o	o	o	o	o	o	x	o	11	230	160	230
15%	x	x	o	o	o	o	o	x	o	15	230	230	230
5%	x	x	o	o	o	o	o	x	x	24	230	x	x

Layout: o = Available ; x = Unavailable

Solenoid under voltage

