


**KUEBLER - ABSOLUTE-CODED
ANGULAR TRANSMITTER SENDIX
5858/5878, OPTICAL, CANOPEN, Ø58M
SERIE 5878 CANOPEN**

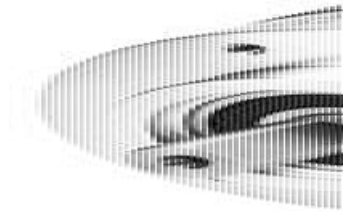

- Housing diameter Ø58 mm
- CANopen
- Safety-Lock™
- High degree of enclosure

PRODUCT DESCRIPTION

Sendix 5858/5878 is a one-way fieldbus transducer with CANopen in robust design. Thanks to the construction of Safety-Lock™ as well as the fully cast housing, the sensor is able to handle even the more demanding applications where there are high demands on the sensor. The wide temperature range combined with the high enclosure class allows the sensor to be used outdoors as well as applications where large temperature changes occur. Sendix 5858/5878 is available with LED indication, which facilitates diagnosis of the sensor and a set button that facilitates calibration.

Please refer to the images below for ordering information.

Order code Shaft version	<div> <div>8.5858</div> <div>Type</div> <div> <div>XX</div> <div>XX</div> <div>2X</div> <div>21</div> <div>1X</div> </div> </div>	
a Flange 1 = clamping flange, IP65 ø 58 mm [2.28"] 3 = clamping flange, IP67 ø 58 mm [2.28"] 2 = synchro flange, IP65 ø 58 mm [2.28"] 4 = synchro flange, IP67 ø 58 mm [2.28"] 5 = square flange, IP65 □ 63.5 mm [2.5"] 7 = square flange, IP67 □ 63.5 mm [2.5"]	d Type of connection <i>removable bus terminal cover</i> 1 = radial cable gland 2 = 2 x M12 connector, 5-pin <i>Fixed connection without bus terminal cover</i> A = radial cable, 2 m [6.56'] PVC B = radial cable, special length PVC *) E = 1 x radial M12 connector, 5-pin F = 2 x radial M12 connector, 5-pin I = 1 x radial M23 connector, 12-pin J = 2 x radial M23 connector, 12-pin *) Available special lengths (connection type B): 3, 5, 8, 10, 15 m [9.84, 16.40, 26.25, 32.80, 49.21'] order code expansion .XXXX = length in dm ex.: 8.5858.112B.2113.0030 (for cable length 3 m)	e Fieldbus profile 21 = CANopen f Options (service) 2 = no options 3 = SET button <i>Optional on request</i> - Ex 2/22 ³⁾ - surface protection salt spray tested

Order code Hollow shaft

8.5878
Type

.XX2X.211X
a b c d e f

a Flange

- 1 = with spring element, long, IP65
- 2 = with spring element, long, IP67
- 3 = with stator coupling, IP65 ø 65 mm [2.56"]
- 4 = with stator coupling, IP67 ø 65 mm [2.56"]
- 5 = with stator coupling, IP65 ø 63 mm [2.48"]**
- 6 = with stator coupling, IP67 ø 63 mm [2.48"]

b Blind hollow shaft

- (insertion depth max. 30 mm [1.18"])
- 3 = ø 10 mm [0.39"]
- 4 = ø 12 mm [0.47"]**
- 5 = ø 14 mm [0.55"]
- 6 = ø 15 mm [0.59"]
- 8 = ø 3/8"
- 9 = ø 1/2"

c Interface / power supply

- 2 = CANopen DS301 V4.02 / 10 ... 30 V DC**

d Type of connection

- removable bus terminal cover
- 1 = radial cable gland
- 2 = 2 x M12 connector, 5-pin**
- Fixed connection without bus terminal cover
- A = radial cable, 2 m [6.56'] PVC
- B = radial cable, special length PVC *)
- E = 1 x radial M12 connector, 5-pin
- F = 2 x radial M12 connector, 5-pin
- I = 1 x radial M23 connector, 12-pin
- J = 2 x radial M23 connector, 12-pin

*) Available special lengths (connection type B):
3, 5, 8, 10, 15 m [9.84, 16.40, 26.25, 32.80, 49.21']
order code expansion .XXXX = length in dm
ex.: 8.5878.542B.2113.0030 (for cable length 3 m)

e Fieldbus profile

- 21 = CANopen**

f Options (service)





- 2 = no options
- 3 = SET button**

Optional on request

- Ex 2/22 ¹⁾
- surface protection
salt spray tested

TECHNICAL DATA

Connection	Cable, M12, M23 contact
Housing diameter	58 mm
IP class	IP65, IP67
Mounting	Hollow shaft
Output	CANopen
Sensor type	Absolute
Shaft diameter max	15 mm
Shaft diameter min	10 mm
Supply voltage dc max	30 V DC
Supply voltage dc min	10 V DC
Temperature operational max	80 °C
Temperature operational min	-40 °C
Version	Singleturn



Bus terminal cover with terminal box type of connection II)									
Direction	CAN_Ground	CAN_Low (-)	CAN_High (+)	0 V power supply	+5V power supply	0 V power supply	+5V power supply	CAN_Low (-)	CAN_High (+)
Abbreviation	CG	CL	CH	0V	+5V	0V	+5V	CL	CH
Cable colour	WH	BN	YE	GN	GY	GN	GY	CL	CH

Cable connection type of connection II)									
Direction	0 V power supply	+5V power supply	CAN_Low (-)	CAN_High (+)	CAN_Ground	0 V power supply	+5V power supply	CAN_Low (-)	CAN_High (+)
Abbreviation	0V	+5V	CL	CH	CG	0V	+5V	CL	CH
Cable colour	WH	BN	YE	GN	GY	WH	BN	YE	GN

Connector M23 type of connection II) or M12 type of connection I)									
Direction	0 V power supply	+5V power supply	CAN_Low (-)	CAN_High (+)	CAN_Ground	0 V power supply	+5V power supply	CAN_Low (-)	CAN_High (+)
Abbreviation	0V	+5V	CL	CH	CG	0V	+5V	CL	CH
M23 PIN assignment	1	2	7	2	7	3	1	2	7
M12 PIN assignment	3	2	5	4	1	3	2	5	4

Bus terminal cover with Connectors 2 x M12 type of connection 2, F or J)									
Direction	CAN_Ground	CAN_Low (-)	CAN_High (+)	0 V power supply	+5V power supply	0 V power supply	+5V power supply	CAN_Low (-)	CAN_High (+)
Signal	CL	CL	CH	0V	+5V	0V	+5V	CL	CH
M23 PIN assignment	1	5	4	3	2	3	2	5	4
M12 PIN assignment	1	5	4	3	2	3	2	5	4

Bus terminal cover with terminal box (type of connection T)

		OUT						IN					
Direction		CAN_Ground	CAN_Low (+)	CAN_High (+)	0 V power supply	+15 power supply	+15 power supply	0 V power supply	+15 power supply	CAN_Low (+)	CAN_High (+)	CAN_Ground	
Abbreviation		CG	CL	CH	0 V	+V		0 V	+V	CL	CH		CG

Cable connection (type of connection A)

		IN					
Direction		0 V power supply	+15 power supply	CAN_Low (+)	CAN_High (+)	CAN_Ground	
Abbreviation		0 V	+V	CL	CH		CG
Cable colour		WH	BN	YS	GN		GV



Bus in and out M23

Connector M23 (type of connection B) or M12 (type of connection E)

		IN					
Direction		0 V power supply	+15 power supply	CAN_Low (+)	CAN_High (+)	CAN_Ground	
Abbreviation		0 V	+V	CL	CH		CG
M12 PIN assignment		10	12	2	7	3	
M12 PIN assignment		3	2	5	4	1	



Bus in

Bus terminal cover with Connectors 2 x M12 (type of connection E, F or B)

		OUT						IN					
Direction		CAN_Ground	CAN_Low (+)	CAN_High (+)	0 V power supply	+15 power supply	+15 power supply	0 V power supply	+15 power supply	CAN_Low (+)	CAN_High (+)	CAN_Ground	
Signal													
M12 PIN assignment		3	2	7	10	12		10	12	2	7	3	
M12 PIN assignment		1	5	6	3	2		3	2	5	4	1	