

## KUEBLER - ABSOLUTE-CODED ANGULAR TRANSMITTER SENDIX F3653 / F3673, OPTICAL, SSI, Ø36 MM

SERIE F3653



- Housing diameter Ø36 mm
- SSI-Interface
- 17 bit resolution
- -40 to +90 ° C working temperature

### PRODUCT DESCRIPTION

Sendix F3653 / F3673 is a series of single-axis optical axial and hole axle outputs with SSI interface and a resolution of up to 17 bits, despite its compact size of 36x42 mm. The sensor also has high enclosure class, shock resistance and a wide temperature range. The sensor is therefore very suitable for applications where extreme environments or temperatures can occur, such as mobile applications. The sensor is supplied with a tangential cable, which means that there is no exposed cable input on the sensor, but it is embedded in the housing itself to increase impact on impact and impact. The Sendix F3653 / F3673 is also available in a salt water resistant version.

Please refer to the images below for ordering information.

| Order code                                       | 8.F3653 . XXXX . XX12 |   |   |                            |   |     |
|--|-----------------------|---|---|----------------------------|---|-----|
| Shaft version                                    | Type                  | a   | b | c                          | d | e f |
| <b>a Flange</b>                                  |                       | <b>c Interface / power supply</b>                             |   | <b>e Code</b>              |   |     |
| 1 = clamping flange, IP67, ø 36 mm [1.42"]       |                       | 1 = SSI, BiSS / 5 V DC  |   | B = SSI, binary            |   |     |
| 3 = clamping flange, IP65, ø 36 mm [1.42"]       |                       | <b>2 = SSI, BiSS / 10 ... 30 V DC</b>                         |   | C = BiSS, binary           |   |     |
| 2 = synchro flange, IP67, ø 36 mm [1.42"]        |                       | 3 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC                     |   | <b>G = SSI, gray</b>       |   |     |
| <b>4 = synchro flange, IP65, ø 36 mm [1.42"]</b> |                       | 4 = SSI, BiSS + 2048 ppr. SinCos / 10 ... 30 V DC             |   |                            |   |     |
|  |                       | 5 = SSI, BiSS / 5 V DC, with sensor output                    |   | <b>f Resolution</b>        |   |     |
| <b>b Shaft (ø x L), with flat</b>                |                       | 6 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC, with sensor output |   | A = 10 bit                 |   |     |
| 1 = ø 6 x 12.5 mm [0.24 x 0.49"]                 |                       | 7 = SSI, BiSS + 2048 ppr. RS422 / 5 V DC                      |   | 2 = 12 bit                 |   |     |
| <b>3 = ø 8 x 15 mm [0.32 x 0.59"]</b>            |                       | 8 = SSI, BiSS + 2048 ppr. RS422 / 10 ... 30 V DC              |   | <b>3 = 13 bit</b>          |   |     |
| 5 = ø 10 x 20 mm [0.39 x 0.79"]                  |                       |   |   | 4 = 14 bit                 |   |     |
| 2 = ø 1/4" x 12.5 mm [0.49"]                     |                       |   |   | 7 = 17 bit                 |   |     |
| 4 = ø 3/8" x 5/8"                                |                       | <b>d Type of connection</b>                                   |   |                            |   |     |
|  |                       | <b>1 = tangential cable, 1 m [3.28] PUR</b>                   |   |                            |   |     |
|  |                       | 3 = tangential cable, 5 m [16.40] PUR                         |   |                            |   |     |
|  |                       | F = tangential cable, special length PUR *)                   |   |                            |   |     |
|  |                       | 8 = axial M12 connector, 8-pin <sup>1)</sup>                  |   |                            |   |     |
|  |                       | *) Available special lengths (connection type F):             |   |                            |   |     |
|  |                       | 2, 3, 8, 10, 15 m [6.56, 9.84, 26.25, 32.80, 49.21']          |   |                            |   |     |
|  |                       | order code expansion .XXXX = length in dm                     |   |                            |   |     |
|  |                       | ex.: 8.F3653.432F.G312.0030 (for cable length 3 m)            |   |                            |   |     |
|  |                       |   |   | <i>Optional on request</i> |   |     |
|  |                       |   |   | - surface protection       |   |     |
|  |                       |   |   | salt spray tested          |   |     |
|  |                       |   |   | - other resolutions        |   |     |

**Order code**  
**Hollow shaft**

**8.F3673** . **XXXX.XX12**  
Type

**a Flange**

- 1 = with spring element, short, IP65
- 3 = with spring element, long, IP65
- 2 = with stator coupling, IP65, ø 46 mm [1.81"]**

**b Through hollow shaft**

- 1 = ø 6 mm [0.24"]
  - 3 = ø 8 mm [0.32"]
  - 2 = ø 1/4"
- Blind hollow shaft*  
(insertion depth max. 14.5 mm [0.57"])
- 4 = ø 10 mm [0.39"]**

**c Interface / power supply**

- 1 = SSI, BiSS / 5 V DC
- 2 = SSI, BiSS / 10 ... 30 V DC**
- 3 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC
- 4 = SSI, BiSS + 2048 ppr. SinCos / 10 ... 30 V DC
- 5 = SSI, BiSS / 5 V DC, with sensor output
- 6 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC, with sensor output
- 7 = SSI, BiSS + 2048 ppr. RS422 / 5 V DC
- 8 = SSI, BiSS + 2048 ppr. RS422 / 10 ... 30 V DC

**d Type of connection**

- 1 = tangential cable, 1 m [3.28] PUR**
- 3 = tangential cable, 5 m [16.40] PUR
- F = tangential cable, special length PUR \*)
- 8 = axial M12 connector, 8-pin <sup>1)</sup>

\*) Available special lengths (connection type F):  
2, 3, 8, 10, 15 m [6.56, 9.84, 26.25, 32.80, 49.21']  
order code expansion .XXXX = length in dm  
ex.: 8.F3673.242FG312.0030 (for cable length 3 m)

**e Code**

- B = SSI, binary
- C = BiSS, binary
- G = SSI, gray**



**f Resolution**

- A = 10 bit
- 2 = 12 bit
- 3 = 13 bit**
- 4 = 14 bit
- 7 = 17 bit

*Optional on request*  
- surface protection  
- salt spray tested  
- other resolutions

# TECHNICAL DATA

|                             |            |
|-----------------------------|------------|
| Connection                  | Cable      |
| Housing diameter            | 36 mm      |
| IP class                    | IP65, IP67 |
| Mounting                    | Shoulder   |
| Output                      | SSI        |
| Sensor type                 | Absolute   |
| Shaft diameter max          | 10 mm      |
| Shaft diameter min          | 6 mm       |
| Supply voltage dc max       | 30 V DC    |
| Supply voltage dc min       | 5 V DC     |
| Temperature operational max | 90 °C      |
| Temperature operational min | -40 °C     |
| Version                     | Singleturn |

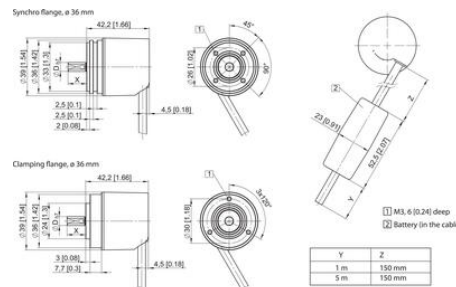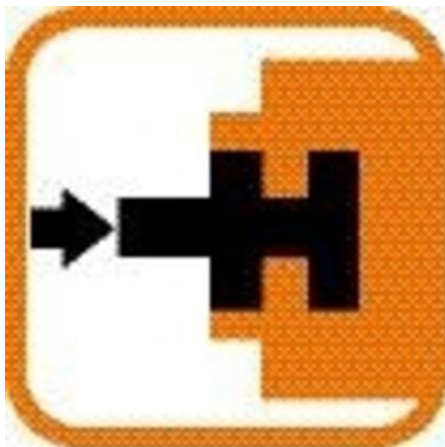


**Terminal assignment**

| Interface | Type of connection | Features                                 | Cable  |
|-----------|--------------------|--|--|
| 1,2       | 1,3                | SSI or BiSS, SET, DIR, Status            | Signal: GND +V +C -C +D -D SET DIR Stat PE<br>Cable colour: WH BN GN YE GY PK BU RD BK VT (CPN, RD, BU, Shield)                                |
| 1,2       | 5                  | SSI or BiSS, SET, DIR                    | M12 connector<br>Signal: GND +V +C -C +D -D SET DIR Shield/PE<br>Cable colour: WH BN GN YE GY PK BU RD BK VT (CPN, RD, BU, Shield)             |
| 3,4       | 1,3                | SSI or BiSS, SET, DIR, 2048 SinCos       | M12 connector<br>Signal: GND +V +C -C +D -D SET DIR A Ainc B Binc PE<br>Cable colour: WH BN GN YE GY PK BU RD BK VT (CPN, RD, BU, Shield)      |
| 5         | 1,3                | SSI or BiSS, SET, DIR, Sensor outputs    | M12 connector<br>Signal: GND +V +C -C +D -D SET DIR ONOinc +Vinc PE<br>Cable colour: WH BN GN YE GY PK BU RD BK VT (CPN, RD, BU, Shield)       |
| 6         | 1,3                | SSI or BiSS, 2048 SinCos, Sensor outputs | M12 connector<br>Signal: GND +V +C -C +D -D ONOinc +Vinc A Ainc B Binc PE<br>Cable colour: WH BN GN YE GY PK BU RD BK VT (CPN, RD, BU, Shield) |
| 7,8       | 1,3                | SSI or BiSS, 2048 incl. RS422            | M12 connector<br>Signal: GND +V +C -C +D -D A Ainc B Binc PE<br>Cable colour: WH BN GN YE GY PK BU RD BK VT (CPN, RD, BU, Shield)              |

+V: Encoder power supply +V DC  
GND: Encoder power supply ground (GND)  
+C: Clock signal  
-C: Data signal  
+D: Direction input. The current position becomes defined as position zero.  
-D: Direction input. If this input is active, output values are counted backwards (decreased) when the shaft is turning clockwise.  
Stat: Status output  
PE: Protective earth  
PH: Plug connector housing (Shield)  
A, Ainc: Incremental output channel A  
B, Binc: Incremental output channel B

Top view of mating side, male contact base



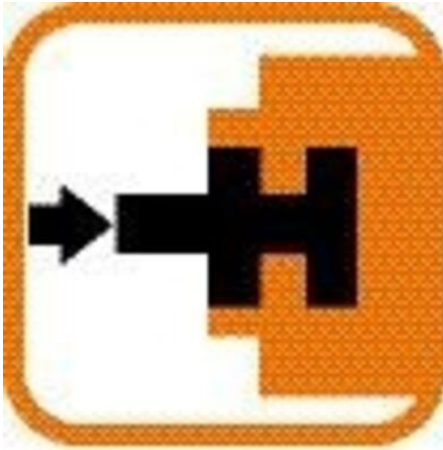

Terminal assignment

| Interface | Type of connector | Features                               | Cable  |
|-----------|-------------------|--|--|
| 1,2       | 5, 3              | 5V or BSS, SET, DIR, Status            | Signal: GND +V +C -C +D -D SET DIR Stat PE<br>Cable colour: WH BN GN YE GY PK BK BU RD VT Shield   |
| 1,2       | 5                 | 5V or BSS, SET, DIR                    | M12 connector<br>Signal: GND +V +C -C +D -D SET DIR<br>M12 connector: 1 2 3 4 5 6 7 8 Pin Shield/PE  |
| 3,4       | 5, 3              | 5V or BSS, SET, DIR, 2048 SinCos       | Cable<br>Signal: GND +V +C -C +D -D SET DIR A A inc B B inc PE<br>Cable colour: WH BN GN YE GY PK BK BU RD VT GT/PR RD-BU Shield                 |
| 5         | 5, 3              | 5V or BSS, SET, DIR, Sensor outputs    | Cable<br>Signal: GND +V +C -C +D -D SET DIR GND <sub>ext</sub> +V <sub>ext</sub> PE<br>Cable colour: WH BN GN YE GY PK BK BU RD VT RD-BU Shield  |
| 6         | 5, 3              | 5V or BSS, 2048 SinCos, Sensor outputs | Cable<br>Signal: GND +V +C -C +D -D GND <sub>ext</sub> +V <sub>ext</sub> PE<br>Cable colour: WH BN GN YE GY PK BK BU RD VK VT GT/PR RD-BU Shield |
| 7,8       | 5, 3              | 5V or BSS, 2048 inc, RS422             | Cable<br>Signal: GND +V +C -C +D -D A A inc B B inc PE<br>Cable colour: WH BN GN YE GY PK BK VT GT/PR RD-BU Shield                               |

- +V: Encoder power supply +V DC
- GND: Encoder power supply ground GND (0V)
- +C, -C: Clock signal
- +D, -D: Data signal
- SET: Set point. The current position becomes defined as position zero.
- DIR: Direction input. If this input is active, output values are counted backwards (increased) when the shaft is turning clockwise.
- Stat: Status output
- PE: Protective earth
- PR: Plug connector housing (Shield)
- A, A inc: Incremental output channel A
- B, B inc: Incremental output channel B

Top view of mating side, male contact base



M12 connector, 8 pin