

**KUEBLER - ABSOLUTE-CODED
ANGULAR TRANSMITTER SENDIX
5868/5888, OPTICAL, CANOPEN, Ø58 MM
SERIE 5868 CANOPEN**







- Housing diameter Ø58 mm
- CANopen / CANopenLift
- High shock resistance
- High enclosure class

PRODUCT DESCRIPTION

Sendix 5868/5888 is a multivariate fieldbus transmitter with profibus in robust design. Thanks to the construction of Safety-Lock[™] as well as the fully cast housing, the sensor is able to handle even the more demanding applications where there are high demands on the sensor. The wide temperature range combined with the high enclosure class allows the sensor to be used outdoors as well as applications where large temperature changes occur. Sendix 5868/5888 has LED indication which facilitates diagnosis of the sensor and a set button that facilitates calibration.


Please refer to the image below for ordering information.






Order code Shaft version	<div> <div>8.5868</div> <div>Type</div> </div> <div> <div>XXXX</div> <div>a b c d</div> </div> <div> <div>XXXX</div> <div>e f</div> </div>	
a Flange 1 = clamping flange, IP65 ø 58 mm [2.28"] 3 = clamping flange, IP67 ø 58 mm [2.28"] 2 = synchro flange, IP65 ø 58 mm [2.28"] 4 = synchro flange, IP67 ø 58 mm [2.28"] 5 = square flange, IP65 □ 63.5 mm [2.5"] 7 = square flange, IP67 □ 63.5 mm [2.5"]	d Type of connection removable bus terminal cover 1 = radial cable gland 2 = 2 x or 3 x M12 connector, 5-pin Fixed connection without bus terminal cover A = radial cable, 2 m [6.56'] PVC B = radial cable, special length PVC *) E = 1 x radial M12 connector, 5-pin F = 2 x radial M12 connector, 5-pin I = 1 x radial M23 connector, 12-pin J = 2 x radial M23 connector, 12-pin K = 1 x Sub-D connector, 9-pin *) Available special lengths (connection type B): 3, 5, 8, 10, 15 m [9.84, 16.40, 26.25, 32.80, 49.21'] order code expansion .XXXX = length in dm ex.: 8.5868.112B.2123.0030 (for cable length 3 m)	e Fieldbus profile 212 = CANopen 221 = CANlift DS417 V1.01 f Options (service) 2 = no options 3 = SET button
b Shaft (ø x L), with flat 1 = 6 x 10 mm [0.24 x 0.39"]¹⁾ 2 = 10 x 20 mm [0.39 x 0.79"]²⁾ 3 = 1/4" x 7/8" 4 = 3/8" x 7/8"		
c Interface / power supply 2 = CANopen DS301 V4.02, 10 ... 30 V DC 5 = CANopen DS301 V4.02, 10 ... 30 V DC with 2048 ppr incremental track (TTL-compatible) ³⁾	Optional on request - Ex 2/22 ⁴⁾ - surface protection salt spray tested - seawater resistant (stainless steel V4A)	Salt spray tested / stainless steel V4A as standard types (deliverable as from 1 unit) <div>  salt spray tested: 8.5868.3222.2122-C </div> <div>  stainless steel V4A: 8.5868.3222.2122-V4A </div>




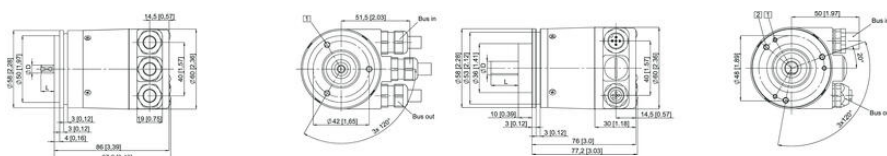

Order code		8.5888		.XXXXX		.XXXX	
Hollow shaft		Type		a	b	c	d
a Flange	1 = with spring element, long, IP65 2 = with spring element, long, IP67 3 = with stator coupling, IP65 ø 65 mm [2.56"] 4 = with stator coupling, IP67 ø 65 mm [2.56"] 5 = with stator coupling, IP65 ø 63 mm [2.48"] 6 = with stator coupling, IP67 ø 63 mm [2.48"]	d Type of connection removable bus terminal cover 1 = radial cable gland 2 = 2 x or 3 x M12 connector, 5-pin Fixed connection without bus terminal cover A = radial cable, 2 m [6.56'] PVC B = radial cable, special length PVC *) E = 1 x radial M12 connector, 5-pin F = 2 x radial M12 connector, 5-pin I = 1 x radial M23 connector, 12-pin J = 2 x radial M23 connector, 12-pin K = 1 x Sub-D connector, 9-pin *) Available special lengths (connection type B): 3, 5, 8, 10, 15 m [9.84, 16.40, 26.25, 32.80, 49.21'] order code expansion .XXXX = length in dm ex.: 8.5888.542B.2123.0030 (for cable length 3 m)	e Fieldbus profile 212 = CANopen 221 = CANlift DS417 V1.01				
b Blind hollow shaft (insertion depth max. 30 mm [1.18"])	3 = ø 10 mm [0.39"] 4 = ø 12 mm [0.47"] 5 = ø 14 mm [0.55"] 6 = ø 15 mm [0.59"] 8 = ø 3/8" 9 = ø 1/2"	f Options (service) 2 = no options 3 = SET button					
c Interface / power supply	2 = CANopen DS301 V4.02, 10 ... 30 V DC 5 = CANopen DS301 V4.02, 10 ... 30 V DC with 2048 ppr incremental track (TTL-compatible) ¹⁾	Optional on request - Ex 2/22 ²⁾ - surface protection salt spray tested - seawater resistant (stainless steel V4A)					
		Salt spray tested / stainless steel V4A as standard types (deliverable as from 1 unit)					
		 salt spray tested: 8.5888.2422.2122-C 8.5888.2522.2122-C	 stainless steel V4A: 8.5888.2422.2122-V4A				

TECHNICAL DATA

Connection	Cable, M12, M23 contact
Housing diameter	58 mm
IP class	IP65, IP67
Mounting	Shoulder
Output	CANopen
Resolution MT	Max. 12 bit
Resolution overall	28 bit (default: 25 bit)
Resolution ST	16 bit (default: 13 bit)
Sensor type	Absolute
Shaft diameter max	10 mm
Shaft diameter min	6 mm
Supply voltage dc max	30 V DC
Supply voltage dc min	10 V DC
Temperature operational max	80 °C
Temperature operational min	-40 °C
Version	Multiturn



Interface	Type of connection	Cable gland (bus terminal cover with terminal box)																																					
2,5	1	<table><tr><th colspan="2">Bus OUT</th><th colspan="2">Bus IN</th></tr><tr><td>Signal</td><td>CAN_GND CAN_L CAN_H</td><td>0V +V</td><td>0V +V CAN_L CAN_H CAN_GND</td></tr><tr><td>Abbreviation</td><td>CG CL CH</td><td>0V +V</td><td>0V +V CL CH CG</td></tr></table>	Bus OUT		Bus IN		Signal	CAN_GND CAN_L CAN_H	0V +V	0V +V CAN_L CAN_H CAN_GND	Abbreviation	CG CL CH	0V +V	0V +V CL CH CG																									
Bus OUT		Bus IN																																					
Signal	CAN_GND CAN_L CAN_H	0V +V	0V +V CAN_L CAN_H CAN_GND																																				
Abbreviation	CG CL CH	0V +V	0V +V CL CH CG																																				
Interface	Type of connection	Cable (insulate unused wires individually before initial start-up)																																					
2,5	A, B	<table><tr><th colspan="2">Bus IN</th><th colspan="2">Bus OUT</th></tr><tr><td>Signal</td><td>0V +V CAN_L CAN_H CAN_GND</td><td>0V +V</td><td>0V +V CAN_L CAN_H CAN_GND</td></tr><tr><td>Abbreviation</td><td>0V +V</td><td>0V +V</td><td>0V +V CAN_L CAN_H CAN_GND</td></tr><tr><td>Cable colour</td><td>WH BN VE GN</td><td>0V</td><td>0V</td></tr></table>	Bus IN		Bus OUT		Signal	0V +V CAN_L CAN_H CAN_GND	0V +V	0V +V CAN_L CAN_H CAN_GND	Abbreviation	0V +V	0V +V	0V +V CAN_L CAN_H CAN_GND	Cable colour	WH BN VE GN	0V	0V																					
Bus IN		Bus OUT																																					
Signal	0V +V CAN_L CAN_H CAN_GND	0V +V	0V +V CAN_L CAN_H CAN_GND																																				
Abbreviation	0V +V	0V +V	0V +V CAN_L CAN_H CAN_GND																																				
Cable colour	WH BN VE GN	0V	0V																																				
Interface	Type of connection	2 x M12 connector (3 x M12 connector with interface 5)																																					
2,5	3, F	<table><tr><th colspan="2">Bus OUT</th><th colspan="2">Bus IN</th></tr><tr><td>Signal</td><td>0V +V CAN_L CAN_H CAN_GND</td><td>0V +V</td><td>0V +V CAN_L CAN_H CAN_GND</td></tr><tr><td>Abbreviation</td><td>0V +V</td><td>0V +V</td><td>0V +V CAN_L CAN_H CAN_GND</td></tr><tr><td>Pin</td><td>3 3 5 4 1</td><td>3 3 5 4 1</td><td></td></tr><tr><td>Signal</td><td>0V +V CAN_L CAN_H CAN_GND</td><td>0V +V</td><td>0V +V CAN_L CAN_H CAN_GND</td></tr><tr><td>Abbreviation</td><td>0V +V</td><td>0V +V</td><td>0V +V CAN_L CAN_H CAN_GND</td></tr><tr><td>Pin</td><td>3 3 5 4 1</td><td>3 3 5 4 1</td><td></td></tr><tr><td>Signal</td><td>Incremental track</td><td>Incremental track</td><td></td></tr><tr><td>Pin</td><td>1 2 3 4 5</td><td>1 2 3 4 5</td><td></td></tr></table>	Bus OUT		Bus IN		Signal	0V +V CAN_L CAN_H CAN_GND	0V +V	0V +V CAN_L CAN_H CAN_GND	Abbreviation	0V +V	0V +V	0V +V CAN_L CAN_H CAN_GND	Pin	3 3 5 4 1	3 3 5 4 1		Signal	0V +V CAN_L CAN_H CAN_GND	0V +V	0V +V CAN_L CAN_H CAN_GND	Abbreviation	0V +V	0V +V	0V +V CAN_L CAN_H CAN_GND	Pin	3 3 5 4 1	3 3 5 4 1		Signal	Incremental track	Incremental track		Pin	1 2 3 4 5	1 2 3 4 5		
Bus OUT		Bus IN																																					
Signal	0V +V CAN_L CAN_H CAN_GND	0V +V	0V +V CAN_L CAN_H CAN_GND																																				
Abbreviation	0V +V	0V +V	0V +V CAN_L CAN_H CAN_GND																																				
Pin	3 3 5 4 1	3 3 5 4 1																																					
Signal	0V +V CAN_L CAN_H CAN_GND	0V +V	0V +V CAN_L CAN_H CAN_GND																																				
Abbreviation	0V +V	0V +V	0V +V CAN_L CAN_H CAN_GND																																				
Pin	3 3 5 4 1	3 3 5 4 1																																					
Signal	Incremental track	Incremental track																																					
Pin	1 2 3 4 5	1 2 3 4 5																																					
Interface	Type of connection	1 x M12 connector																																					
2,5	E	<table><tr><th colspan="2">Bus IN</th></tr><tr><td>Signal</td><td>0V +V CAN_L CAN_H CAN_GND</td></tr><tr><td>Abbreviation</td><td>0V +V</td></tr><tr><td>Pin</td><td>3 3 5 4 1</td></tr></table>	Bus IN		Signal	0V +V CAN_L CAN_H CAN_GND	Abbreviation	0V +V	Pin	3 3 5 4 1																													
Bus IN																																							
Signal	0V +V CAN_L CAN_H CAN_GND																																						
Abbreviation	0V +V																																						
Pin	3 3 5 4 1																																						
Interface	Type of connection	2 x M12 connector																																					
2,5	F	<table><tr><th colspan="2">Bus OUT</th><th colspan="2">Bus IN</th></tr><tr><td>Signal</td><td>0V +V CAN_L CAN_H CAN_GND</td><td>0V +V</td><td>0V +V CAN_L CAN_H CAN_GND</td></tr><tr><td>Abbreviation</td><td>0V +V</td><td>0V +V</td><td>0V +V CAN_L CAN_H CAN_GND</td></tr><tr><td>Pin</td><td>10 12 2 7 3</td><td>10 12 2 7 3</td><td></td></tr><tr><td>Signal</td><td>0V +V CAN_L CAN_H CAN_GND</td><td>0V +V</td><td>0V +V CAN_L CAN_H CAN_GND</td></tr><tr><td>Abbreviation</td><td>0V +V</td><td>0V +V</td><td>0V +V CAN_L CAN_H CAN_GND</td></tr><tr><td>Pin</td><td>10 12 2 7 3</td><td>10 12 2 7 3</td><td></td></tr></table>	Bus OUT		Bus IN		Signal	0V +V CAN_L CAN_H CAN_GND	0V +V	0V +V CAN_L CAN_H CAN_GND	Abbreviation	0V +V	0V +V	0V +V CAN_L CAN_H CAN_GND	Pin	10 12 2 7 3	10 12 2 7 3		Signal	0V +V CAN_L CAN_H CAN_GND	0V +V	0V +V CAN_L CAN_H CAN_GND	Abbreviation	0V +V	0V +V	0V +V CAN_L CAN_H CAN_GND	Pin	10 12 2 7 3	10 12 2 7 3										
Bus OUT		Bus IN																																					
Signal	0V +V CAN_L CAN_H CAN_GND	0V +V	0V +V CAN_L CAN_H CAN_GND																																				
Abbreviation	0V +V	0V +V	0V +V CAN_L CAN_H CAN_GND																																				
Pin	10 12 2 7 3	10 12 2 7 3																																					
Signal	0V +V CAN_L CAN_H CAN_GND	0V +V	0V +V CAN_L CAN_H CAN_GND																																				
Abbreviation	0V +V	0V +V	0V +V CAN_L CAN_H CAN_GND																																				
Pin	10 12 2 7 3	10 12 2 7 3																																					
Interface	Type of connection	1 x M12 connector																																					
2,5	G	<table><tr><th colspan="2">Bus IN</th></tr><tr><td>Signal</td><td>0V +V CAN_L CAN_H CAN_GND</td></tr><tr><td>Abbreviation</td><td>0V +V</td></tr><tr><td>Pin</td><td>10 12 2 7 3</td></tr></table>	Bus IN		Signal	0V +V CAN_L CAN_H CAN_GND	Abbreviation	0V +V	Pin	10 12 2 7 3																													
Bus IN																																							
Signal	0V +V CAN_L CAN_H CAN_GND																																						
Abbreviation	0V +V																																						
Pin	10 12 2 7 3																																						
Interface	Type of connection	Sub-D connector																																					
2,5	H	<table><tr><th colspan="2">Bus IN</th></tr><tr><td>Signal</td><td>0V +V CAN_L CAN_H CAN_GND</td></tr><tr><td>Abbreviation</td><td>0V +V</td></tr><tr><td>Pin</td><td>0 9 2 7 3</td></tr></table>	Bus IN		Signal	0V +V CAN_L CAN_H CAN_GND	Abbreviation	0V +V	Pin	0 9 2 7 3																													
Bus IN																																							
Signal	0V +V CAN_L CAN_H CAN_GND																																						
Abbreviation	0V +V																																						
Pin	0 9 2 7 3																																						

Interface	Type of connection	Cable gland (bus terminal cover with terminal box)																												
2,5	1	<table><tr><th colspan="2">Bus OUT</th><th colspan="2">Bus IN</th></tr><tr><td>Signal</td><td>CAN_GND CAN_L CAN_H</td><td>0V +V</td><td>0V +V CAN_L CAN_H CAN_GND</td></tr><tr><td>Abbreviation</td><td>CG CL CH</td><td>0V +V</td><td>0V +V CL CH CG</td></tr></table>	Bus OUT		Bus IN		Signal	CAN_GND CAN_L CAN_H	0V +V	0V +V CAN_L CAN_H CAN_GND	Abbreviation	CG CL CH	0V +V	0V +V CL CH CG																
Bus OUT		Bus IN																												
Signal	CAN_GND CAN_L CAN_H	0V +V	0V +V CAN_L CAN_H CAN_GND																											
Abbreviation	CG CL CH	0V +V	0V +V CL CH CG																											
Interface	Type of connection	Cable (insulate unused wires individually before initial start-up)																												
2,5	A, B	<table><tr><th colspan="2">Bus IN</th><th colspan="2">Bus OUT</th></tr><tr><td>Signal</td><td>0V +V CAN_L CAN_H CAN_GND</td><td>0V +V</td><td>0V +V CAN_L CAN_H CAN_GND</td></tr><tr><td>Cable colour</td><td>WH BN VE GN</td><td>0V</td><td>0V</td></tr></table>	Bus IN		Bus OUT		Signal	0V +V CAN_L CAN_H CAN_GND	0V +V	0V +V CAN_L CAN_H CAN_GND	Cable colour	WH BN VE GN	0V	0V																
Bus IN		Bus OUT																												
Signal	0V +V CAN_L CAN_H CAN_GND	0V +V	0V +V CAN_L CAN_H CAN_GND																											
Cable colour	WH BN VE GN	0V	0V																											
Interface	Type of connection	2 x M12 connector (3 x M12 connector with interface 5)																												
2,5	3, F	<table><tr><th colspan="2">Bus OUT</th><th colspan="2">Bus IN</th></tr><tr><td>Signal</td><td>0V +V CAN_L CAN_H CAN_GND</td><td>0V +V</td><td>0V +V CAN_L CAN_H CAN_GND</td></tr><tr><td>Pin</td><td>3 3 5 4 1</td><td>3 3 5 4 1</td><td></td></tr><tr><td>Signal</td><td>0V +V CAN_L CAN_H CAN_GND</td><td>0V +V</td><td>0V +V CAN_L CAN_H CAN_GND</td></tr><tr><td>Pin</td><td>3 3 5 4 1</td><td>3 3 5 4 1</td><td></td></tr><tr><td>Signal</td><td colspan="3">Incremental track</td></tr><tr><td>Pin</td><td colspan="3">1 2 3 4 5</td></tr></table> 	Bus OUT		Bus IN		Signal	0V +V CAN_L CAN_H CAN_GND	0V +V	0V +V CAN_L CAN_H CAN_GND	Pin	3 3 5 4 1	3 3 5 4 1		Signal	0V +V CAN_L CAN_H CAN_GND	0V +V	0V +V CAN_L CAN_H CAN_GND	Pin	3 3 5 4 1	3 3 5 4 1		Signal	Incremental track			Pin	1 2 3 4 5		
Bus OUT		Bus IN																												
Signal	0V +V CAN_L CAN_H CAN_GND	0V +V	0V +V CAN_L CAN_H CAN_GND																											
Pin	3 3 5 4 1	3 3 5 4 1																												
Signal	0V +V CAN_L CAN_H CAN_GND	0V +V	0V +V CAN_L CAN_H CAN_GND																											
Pin	3 3 5 4 1	3 3 5 4 1																												
Signal	Incremental track																													
Pin	1 2 3 4 5																													
Interface	Type of connection	1 x M12 connector																												
2,5	E	<table><tr><th colspan="2">Bus IN</th></tr><tr><td>Signal</td><td>0V +V CAN_L CAN_H CAN_GND</td></tr><tr><td>Pin</td><td>3 3 5 4 1</td></tr></table> 	Bus IN		Signal	0V +V CAN_L CAN_H CAN_GND	Pin	3 3 5 4 1																						
Bus IN																														
Signal	0V +V CAN_L CAN_H CAN_GND																													
Pin	3 3 5 4 1																													
Interface	Type of connection	2 x M12 connector																												
2,5	F	<table><tr><th colspan="2">Bus OUT</th><th colspan="2">Bus IN</th></tr><tr><td>Signal</td><td>0V +V CAN_L CAN_H CAN_GND</td><td>0V +V</td><td>0V +V CAN_L CAN_H CAN_GND</td></tr><tr><td>Pin</td><td>10 12 2 7 3</td><td>10 12 2 7 3</td><td></td></tr><tr><td>Signal</td><td>0V +V CAN_L CAN_H CAN_GND</td><td>0V +V</td><td>0V +V CAN_L CAN_H CAN_GND</td></tr><tr><td>Pin</td><td>10 12 2 7 3</td><td>10 12 2 7 3</td><td></td></tr></table> 	Bus OUT		Bus IN		Signal	0V +V CAN_L CAN_H CAN_GND	0V +V	0V +V CAN_L CAN_H CAN_GND	Pin	10 12 2 7 3	10 12 2 7 3		Signal	0V +V CAN_L CAN_H CAN_GND	0V +V	0V +V CAN_L CAN_H CAN_GND	Pin	10 12 2 7 3	10 12 2 7 3									
Bus OUT		Bus IN																												
Signal	0V +V CAN_L CAN_H CAN_GND	0V +V	0V +V CAN_L CAN_H CAN_GND																											
Pin	10 12 2 7 3	10 12 2 7 3																												
Signal	0V +V CAN_L CAN_H CAN_GND	0V +V	0V +V CAN_L CAN_H CAN_GND																											
Pin	10 12 2 7 3	10 12 2 7 3																												
Interface	Type of connection	1 x M12 connector																												
2,5	G	<table><tr><th colspan="2">Bus IN</th></tr><tr><td>Signal</td><td>0V +V CAN_L CAN_H CAN_GND</td></tr><tr><td>Pin</td><td>10 12 2 7 3</td></tr></table> 	Bus IN		Signal	0V +V CAN_L CAN_H CAN_GND	Pin	10 12 2 7 3																						
Bus IN																														
Signal	0V +V CAN_L CAN_H CAN_GND																													
Pin	10 12 2 7 3																													
Interface	Type of connection	Sub-D connector																												
2,5	H	<table><tr><th colspan="2">Bus IN</th></tr><tr><td>Signal</td><td>0V +V CAN_L CAN_H CAN_GND</td></tr><tr><td>Pin</td><td>0 9 2 7 3</td></tr></table> 	Bus IN		Signal	0V +V CAN_L CAN_H CAN_GND	Pin	0 9 2 7 3																						
Bus IN																														
Signal	0V +V CAN_L CAN_H CAN_GND																													
Pin	0 9 2 7 3																													