


## SOCKETS FOR C3 INDUSTRIAL RELAYS

3-pole

S3B

Socket For C3 Relay 11 Pin Screw

- Both DIN and EN connection numbering
- Semi-protected
- Can be equipped with S3BC code system
- Integrated retaining bow

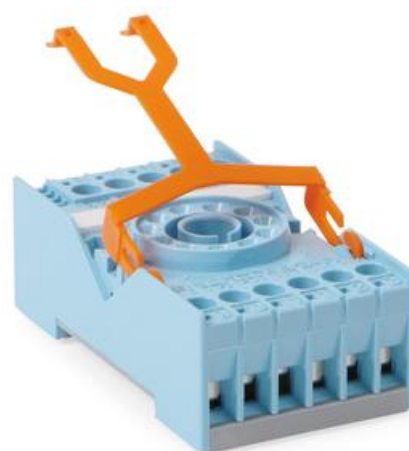

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### OUTPUT DATA

Breaking Voltage	250 V
Breaking capacity current	10 A

#### GENERAL DATA

Isolation connection/connection	2500 V
Isolation connection/rail	2500 V
Material	Lexan
Torque connection	0,7 Nm
Mounting	DIN-rail
Screw size	M3, Pozi
Connection area single wire	4 mm <sup>2</sup> / 2x2,25 mm <sup>2</sup>
Connection area multiple conductors	0,35-2,5 mm <sup>2</sup>
Temperature operational min	-40 °C
Storage temperature min	-40 °C
Storage temperature max	80 °C
Temperature operational max	60 °C
Weight	55 g

