



LED FLASHING BEACON/SOUNDER, CS1

C111621005

LED Alarm sounder, Red housing, Amber, 24 V dc, CS1

- Vertical or horizontal mount, cost effective beacon with sounder
- 86-106 dB Range
- Flashing beacon with 32 tones



PRODUCT DESCRIPTION

The CS1 is a cost effective combination-module with flashing LEDs. Tone selection and noise levels are set using internal dip-switches and the unit is IP65 for mounting both indoors and outdoors.


With 32 different tone settings available the CS1 is suitable for many signalling applications.

- cost effective LES flashing beacon electronic multitone siren
- 32 tones
- tone type and volume selectable via DIP switch
- low nominal current (11 - 37 mA)
- quick fit installation by bayonet fixing
- lateral cable entry possible

TECHNICAL DATA



Flash frequency	1 Hz
Housing Colour	Red
IP class	IP65
Lens colour	Orange
Light source	LED
Light type	Orange LED
Mounting	Horizontal, Vertical
Nominal current max	0.041 A
Nominal current min	0.014 A
Number of tones	32

Sound control	Yes
Sound level max	109 dB
Sound level min	88 dB
Supply voltage	24 V
Supply voltage ac/dc max	35 V
Supply voltage ac/dc min	18 V
Temperature operational max	70 °C
Temperature operational min	-20 °C
Tone frequency max	2900 Hz
Tone frequency min	440 Hz
Weight	258 g

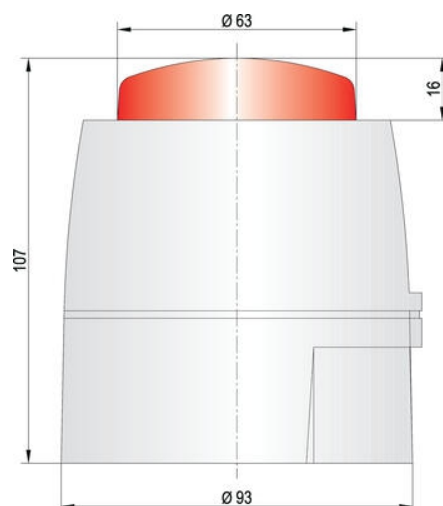

Tontabelle / Tone table

No.	Sound	Tone frequency	DR-switch	2nd stage alarm (Hz)
1	1 F Siren	800 Hz on 0.5 sec	11111	800 cont
2	Overhead tone BS standard	1020 Hz on 24s	11110	800 cont
3	Warning tone BS standard	800 Hz on 0.5 sec	11101	800 cont
4	Overhead tone US standard	1020 Hz on 24s	11100	800 cont
5	1 F Back up horn/alarms	1020 Hz on 0.5 sec on/off	11011	200 cont
6	1 F Back up alarm	1020 Hz on 1.0 sec on/off	11010	800 cont
7	1 F Back up horn/alarms - Int	1020 Hz on 1.0 sec on/off	11001	800 cont
8	1 F Cordless tone BS/US	800 Hz cont	11000	Same tone
9	Overhead tone 1190	1020 Hz on 11s	10111	800 cont
10	Australian slow whoop	Intermittent 970Hz 0.625ms on/0.625ms off	10110	1.75 sec on 0.5 sec off 800-5000
11	Dutch sweep tone	970Hz cont	10101	1.5 sec on 0.5 sec off 800-5000
12	Overhead tone tone	1020 Hz on 24s	10100	800 cont
13	Overhead tone 24s	1020 Hz on 24s	10011	800 cont
14	Overhead 1F also siren	1020 Hz on 24s	10010	200 cont
15	Test/E-Alarm	1020 Hz on 24s	10001	200 cont
16	US Temporal Pattern 1F	250Hz for 0.5 sec on 0.5 sec off x3	10000	800 cont
17	Intermittent tone BS standard	Intermittent tone 800Hz on 0.5 sec on/off	01111	800 cont
18	250 BS/1 F BS/527 P1 1 1 1 1	Intermittent tone 800Hz on 0.5 sec on/off	01110	Same tone
19	Intermittent tone standard	1000 Hz on 0.5 sec on/off	01101	800 cont
20	SC800 1F	Intermittent 2024 Hz on 0.5 sec on/off	01100	Same tone
21	Continuous tone	800 Hz cont	01011	Same tone
22	1 F Siren	800 Hz on 0.5 sec	01010	800 cont
23	1 F Cordless	800 Hz	01001	200 cont
24	Overhead tone 24s	1020 Hz on 24s	01000	800 cont
25	Overhead 1F tone	Intermittent 1020 Hz on 0.5 sec	00111	800 cont
26	Overhead tone 24s	Intermittent 1020 Hz on 24s	00110	Same tone
27	French tone BS/US	Intermittent 1020 Hz on 0.5 sec on/off	00101	800 cont
28	Overhead tone 24s	Intermittent 1020 Hz on 24s	00100	Same tone
29	US Temporal Pattern 1F	250 Hz for 0.5 sec on 0.5 sec off x3	00011	200 cont
30	Siren 2 sec ramp 1/short	800 Hz on 2 sec then 1020 Hz on 0.5 sec	00010	800 cont
31	1 F Siren	800 Hz on 0.5 sec	00001	800 cont
32	Siren 2 sec ramp 1/long	800 Hz on 2 sec then 1020 Hz on 0.5 sec	00000	800 cont

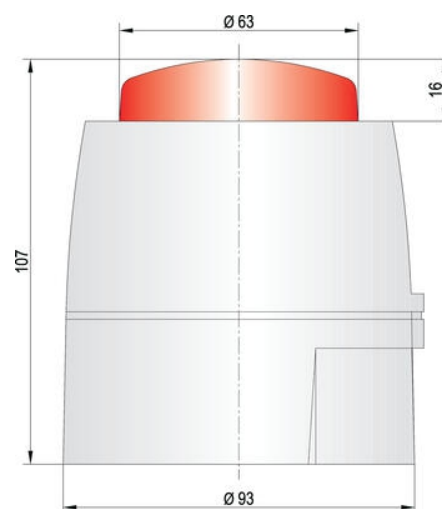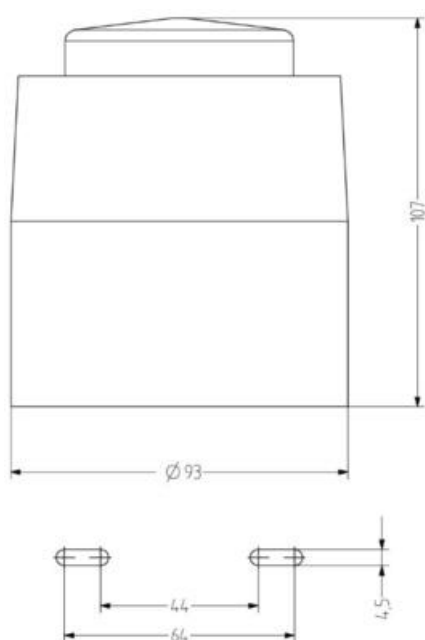

Nr.	Sound	Tone frequency	DR-switch	2nd stage alarm (Hz)
1	LF Buzzer	800 - 1000Hz at 0.5 sec	111111	800 cont
2	Alarm tone with 100 Hz signal	800/900Hz at 2Hz	111110	800 cont
3	Warning tone 100 Hz signal	800/1000Hz at 0.5 sec	111101	800 cont
4	Alarm tone with 100 Hz signal	800/900Hz at 2Hz	111100	800 cont
5	LF Buzzer with 100 Hz signal	800Hz at 1.0 sec on/off	110111	800 cont
6	LF Buzzer with 100 Hz signal	800Hz at 1.0 sec on/off	110110	800 cont
7	LF Buzzer with 100 Hz signal	800Hz at 1.0 sec on/off	110011	800 cont
8	LF Buzzer with 100 Hz signal	800Hz at 1.0 sec on/off	110010	800 cont
9	Alarm tone 100 Hz	800/900Hz at 1Hz	101111	800 cont
10	Australian slow whoop	Intermittent 970Hz 0.425ms on/0.425ms off	101110	800/900 3.75 sec on 0.425 sec off
11	Dutch sweep tone	970Hz cont	101011	0.5 sec on 0.5 sec off
12	Alarm tone 100 Hz	800/900Hz at 2Hz	101010	800 cont
13	Alarm tone 100 Hz	800/900Hz at 2Hz	100111	800 cont
14	Alarm tone 100 Hz	800/900Hz at 2Hz	100110	800 cont
15	Alarm tone 100 Hz	800/900Hz at 2Hz	100011	800 cont
16	US Temporal Pattern 1F	800Hz for 0.5 sec on 0.5 sec off	100010	800 cont
17	Intermittent tone 800 Hz	Intermittent tone 800Hz at 0.5 sec on/off	011111	800 cont
18	Intermittent tone 800 Hz	Intermittent tone 800Hz at 0.5 sec on/off	011110	800 cont
19	Intermittent tone 800 Hz	Intermittent tone 800Hz at 0.5 sec on/off	011101	800 cont
20	Intermittent tone 800 Hz	Intermittent tone 800Hz at 0.5 sec on/off	011100	800 cont
21	Intermittent tone 800 Hz	Intermittent tone 800Hz at 0.5 sec on/off	011011	800 cont
22	Intermittent tone 800 Hz	Intermittent tone 800Hz at 0.5 sec on/off	011010	800 cont
23	Intermittent tone 800 Hz	Intermittent tone 800Hz at 0.5 sec on/off	011001	800 cont
24	Intermittent tone 800 Hz	Intermittent tone 800Hz at 0.5 sec on/off	011000	800 cont
25	Intermittent tone 800 Hz	Intermittent tone 800Hz at 0.5 sec on/off	010111	800 cont
26	Intermittent tone 800 Hz	Intermittent tone 800Hz at 0.5 sec on/off	010110	800 cont
27	Intermittent tone 800 Hz	Intermittent tone 800Hz at 0.5 sec on/off	010101	800 cont
28	Intermittent tone 800 Hz	Intermittent tone 800Hz at 0.5 sec on/off	010100	800 cont
29	Intermittent tone 800 Hz	Intermittent tone 800Hz at 0.5 sec on/off	010011	800 cont
30	Intermittent tone 800 Hz	Intermittent tone 800Hz at 0.5 sec on/off	010010	800 cont
31	Intermittent tone 800 Hz	Intermittent tone 800Hz at 0.5 sec on/off	010001	800 cont
32	Intermittent tone 800 Hz	Intermittent tone 800Hz at 0.5 sec on/off	010000	800 cont

