

## LUMEL - S4AO ANALOGUE OUTPUT CONVERTER - 4 CHANNEL

S4AO1100E0

S4AO, RS-485 convertor, 4x 0-20mA Outputs, 85-253V ac, 90-300V dc Supply


- Conversion of RS-485 MODBUS data into standard analogue signals
- Two independent communication ports
- Possibility to work as Master/Slave
- Master Modbus function dedicated to read out data from RS-485 devices
- Slave Modbus function to set the signal on analog outputs



### PRODUCT DESCRIPTION

We are pleased to announce the launch of the Lumel S4AO analogue output converter

- The output signals are divided into 2 sets of 2 outputs, which are isolated from one another.
- RS-485 and USB ports are isolated from output signals and the supply.
- The module setting can be easily done through USB or one of the RS-485 interfaces using the free e-Con program.
- The main advantages which distinguish our product from other products of the same kind
- Possibility to connect a number modules through RS485 in order to increase the number of analog outputs.
- 2 independent RS-485 ports with Modbus protocol (possibility to work as Master/Slave).
- Master Modbus function dedicated to read out data from other RS-485 devices and to scale analog value.
- Slave Modbus function to set the signal on analog outputs.
- Output work time counter for values above and below a certain threshold.
- The module can be programmed through USB without the need to connect the power supply.
- The module has modular design and is dedicated to be mounted on the S-type rail acc. to EN 62208 ( module's width is equal to 3 standard modules). It is perfect to be mounted in a switchboard cabinets.

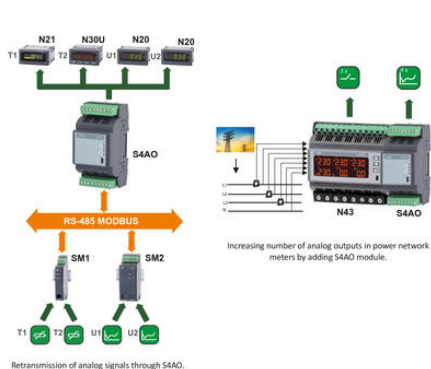

ORDERING CODE:				
S4AO	X	X	X	X
Outputs:				
4 current outputs, 0/4...20 mA	1			
4 voltage outputs, 0...30 V	2			
2 sets of 1 voltage + 1 current output: 0...30 V and 0/4...20 mA	3			
set to customer's requirements*	X			
Supply voltage:				
85...253 V a.c./90...300 V d.c.	1			
20...40 V a.c./20...60 V d.c.	2			
Version:				
standard	00			
custom-made*	XX			
Language:				
Polish	P			
English	E			
other*	X			
Acceptance tests:				
without extra quality requirements	0			
with an extra quality inspection certificate	1			
acc. to customer's requirements*	X			
* - After agreeing with the manufacturer				

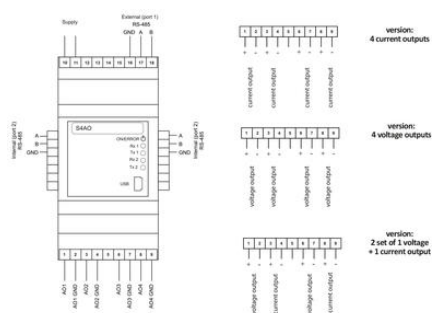


Fig. 1 Electrical connections of the S4AO module.

Fig. 2 Analog outputs versions.