OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

MINI CAM SWITCHES

223505
Mini Cam Switch 10A - Changeover With Off - 1 Pole



- Switching current 10A
- Compact size
- Mounting Ø 22.5mm or Ø 16mm
- IP65

PRODUCT DESCRIPTION

Miniature cam switches rated at 10A in a compact size ideal for applications with limited available space.

The mounting is simple with only a single hole required in either Ø16 mm or Ø22 mm.


The terminal screws are mounted at a 45º angle making electrical connection easier if the switch has already been mounted.

Each switch is supplied complete with engraved legend plate, frame and handle.


TECHNICAL DATA


1333_Plate (mm)	30x30
Angle	45°
Cable area max	2x1,5 mm²
Cable area min	1x0,5 mm²
Conventional free air thermal current Ith	10 A
Function	Stable
Mounting	Single hole mounting Ø16mm/22.5mm
Number of contacts	2
Number of poles	1
Positions	3
Protection rating front of panel	IP65
Protection rating rear of panel	IP20


Rated insulation voltage Ui	500 V
Rated operating current Ie (AC15/230V)	2.5 A
Rated operating current Ie (AC21A/22A)	10 A
Rated operating current Ie (DC-1/24 VDC)	10 A
Rated operating power (AC23A/3x230V)	1.8 kW
Rated operating power (AC23A/3x400V)	3 kW
Rated operating power (AC3/3x230V)	1.8 kW
Rated operating power (AC3/3x400V)	2.2 kW
Standards	CE, CSA 22.2, IEC 60947-3 , IEC 60947-1, UL, UL 508
Temperature operational max	50 °C
Temperature operational min	-20 °C
Type	Changeover switch
Weight	32 g

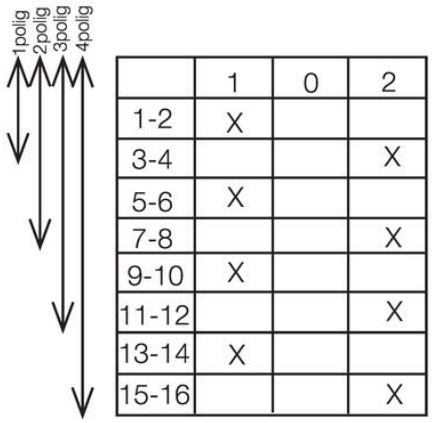


	1	0	2
1-2	X		
3-4			X
5-6	X		
7-8			X
9-10	X		
11-12			X
13-14	X		
15-16			X

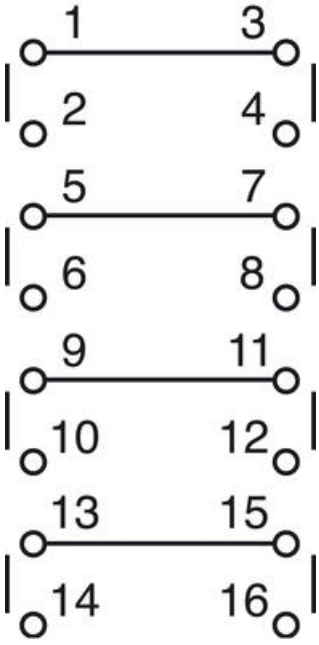

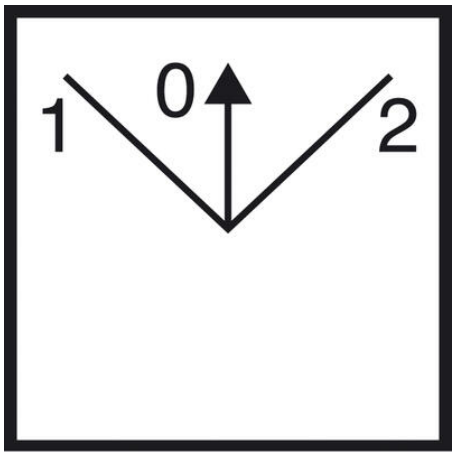

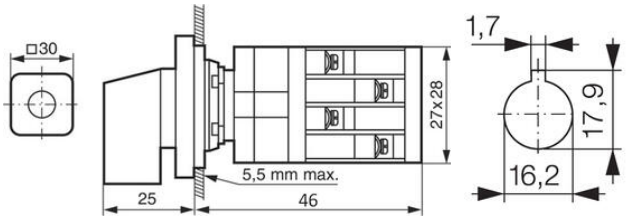



► CHANGE-OVER SWITCH WITH "OFF" POSITION

