OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

DUELCO NST-2009D SAFETY RELAY WITH TIMED OUTPUTS

42080021
NST2009D Cat 4 E-Stop Relay 24Vac/dc with Delayed Outputs



- Safety Category 4 (PLe)
- 2 NO safety outputs + 1 NC signal output
- 2 NO delayed outputs (0 - 600 sec)
- Status-/fault indication via LEDs
- Short circuit monitoring

PRODUCT DESCRIPTION

Flexible safety relay with time delayed outputs for the highest safety category.

TECHNICAL DATA

SUPPLY VOLTAGE

Supply voltage	24V AC/DC
Tolerance	±10%

INPUT AND OUTPUT

Safety outputs NO	4
Signal output NC	1


HOUSING

IP class housing	IP40
IP class connection	IP20
Temperature operational min	-25 °C
Temperature operational max	50 °C

APPROVALS

Safety category	4

PL	e
Mechanical life expectancy	1 million
Approvals	CE, cULus




TIME DELAY TABLE - 0 - 600 SEC.


	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
ON	0,05	0,1	0,2	0,3	0,4	0,5	0,6	0,7	0,8	0,9	1	1,1	1,2	1,3	1,4	1,5
ON	0,25	0,5	1	1,5	2	2,5	3	3,5	4	4,5	5	6	7	8	9	10
ON	1,5	3	6	9	12	15	18	21	24	27	30	36	42	48	54	60
ON	15	30	60	90	120	150	180	210	240	270	300	360	420	480	540	600


STATUS TABLE, LED'S


LED Ub	LED K1	LED K2	LED K3	LED K4	Interpretation / Possible Fault (depends on which connection example is being used)
ON	OFF	OFF	OFF	OFF	Supply OK
OFF	OFF	OFF	OFF	OFF	Supply not connected or missing / bad connection
ON	Blinking	Blinking	Blinking	Blinking	Monitoring circuit has not detected any faults and the relay is ready for reset
ON	ON	ON	ON	ON	Relay activated
ON	OFF	OFF	ON	ON	Emergency stop activated, time delay still active

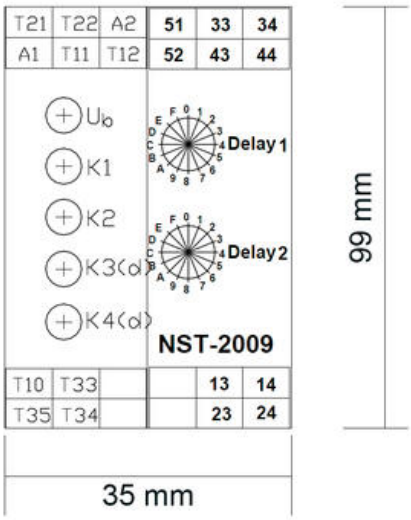



Depth 114,50mm

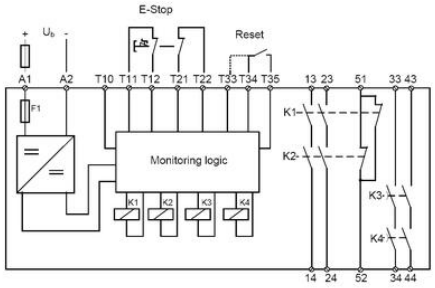


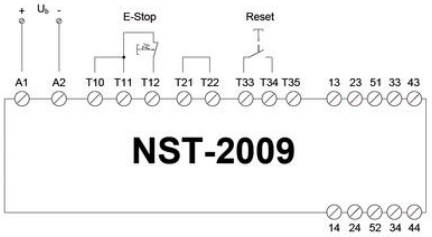


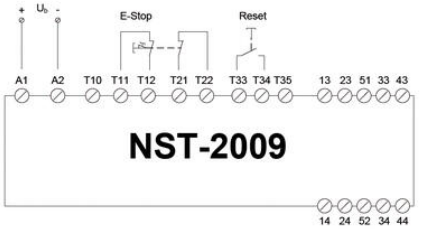

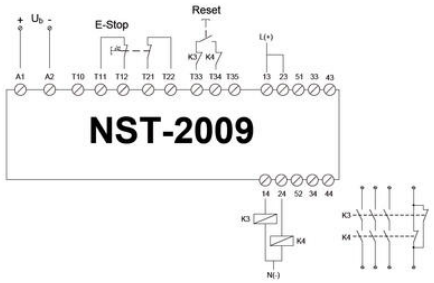

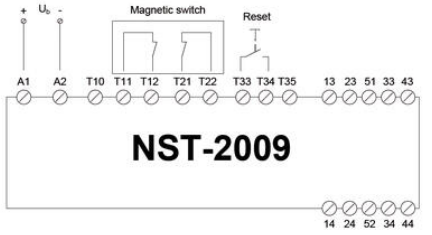

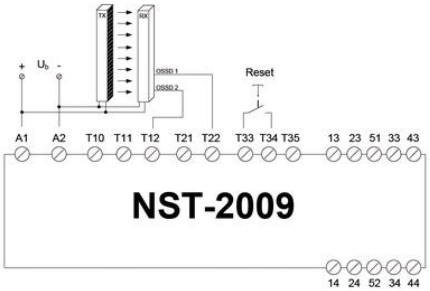

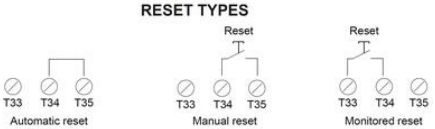


TIME DELAY TABLE - 0 - 600 SEC.

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
ON	0,05	0,1	0,2	0,3	0,4	0,5	0,6	0,7	0,8	0,9	1	1,1	1,2	1,3	1,4	1,5
ON	0,25	0,5	1	1,5	2	2,5	3	3,5	4	4,5	5	6	7	8	9	10
ON	1,5	3	6	9	12	15	18	21	24	27	30	36	42	48	54	60
ON	15	30	60	90	120	150	180	210	240	270	300	360	420	480	540	600

STATUS TABLE, LED'S

LED Ub	LED K1	LED K2	LED K3	LED K4	Interpretation / Possible Fault (depends on which connection example is being used)
ON	OFF	OFF	OFF	OFF	Supply OK
OFF	OFF	OFF	OFF	OFF	Supply not connected or missing / bad connection
ON	Blinking	Blinking	Blinking	Blinking	Monitoring circuit has not detected any faults and the relay is ready for reset
ON	ON	ON	ON	ON	Relay activated
ON	OFF	OFF	ON	ON	Emergency stop activated, time delay still active

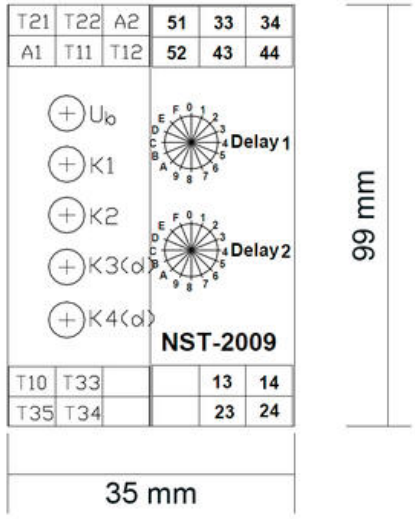

Depth 114,50mm

