**OEM Automatic Ltd**
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

# SYNTEC NICKEL PLATED BRASS

Syntec®

1045.40.280
Gland Syntec NPB, M40, ø19…28mm



- Trapezoidal strain relief
- Lamellar technology
- -40°C…+100°C
- Polyamide PA 6 insert
- IP68

**PRODUCT DESCRIPTION**

# TECHNICAL DATA

## GENERAL DATA

| | |
|---|---|
| **Thread Size (G)** | M40 |
| **Insert Type** | One-Piece |
| **Cable diameter min** | 19 mm |
| **Cable diameter max** | 28 mm |
| **IP class** | IP 68 |

## DIMENSIONS

| | |
|---|---|
| **Thread pitch** | 1.5 |
| **Thread length** | 8 mm |
| **Height (H)** | 40 mm |
| **Spanner width (AF)** | 46 mm |

## MATERIALS

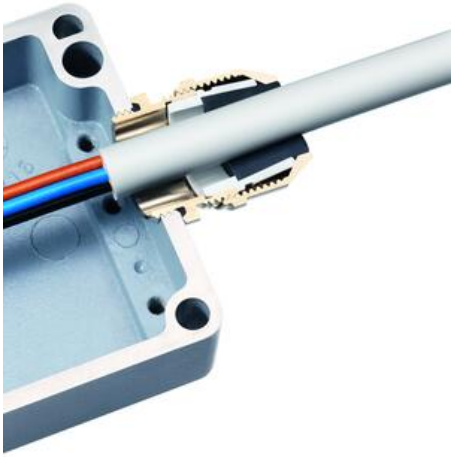
| | |
|---|---|
| **Materials O-ring** | NBR |
| **Lamellar insert material** | Polyamide |
| **sealing ring material** | TPE |
| **Temperature range** | -40°C ... +100°C |

## APPROVALS

| | |
|---|---|
| **Approvals** | CE, cRUus, DNV, EAC, VDE |
| **Strain relief** | Version A acc. to EN 62444 |

## ADDITIONAL DATA

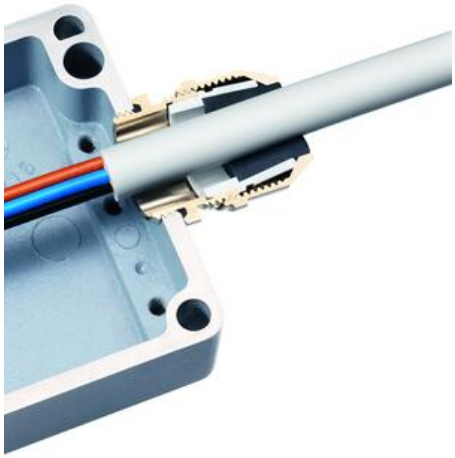
| | |
|---|---|
| **Pack size** | 10 |
| **Country of origin** | CH |
| **Tariff code** | 74199949 |
| **Weight** | 143.8 g |





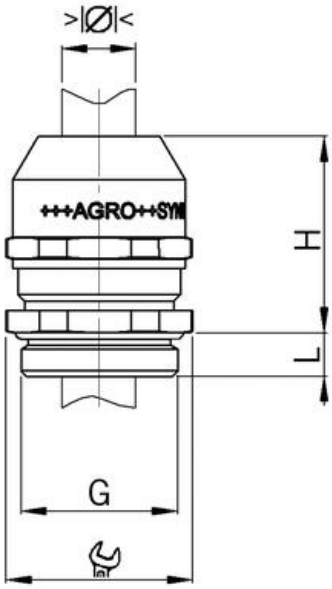









>|Ø|<
AGRO
H
L
G