OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

SYNTEC NICKEL PLATED BRASS

Syntec®

1045.17.100
Gland Syntec NPB, M16, ø4.5…10mm



- Trapezoidal strain relief
- Lamellar technology
- -40°C…+100°C
- Polyamide PA 6 insert
- IP68

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Thread Size (G)	M16
Insert Type	One-Piece
Cable diameter min	4.5 mm
Cable diameter max	10 mm
IP class	IP 68

DIMENSIONS

Thread pitch	1.5
Thread length	5 mm
Height (H)	20 mm
Spanner width (AF)	18 mm

MATERIALS


Materials O-ring	NBR
Lamellar insert material	Polyamide
sealing ring material	TPE
Temperature range	-40°C ... +100°C

APPROVALS

Approvals	CE, cRUus, DNV, EAC, VDE
Strain relief	Version A acc. to EN 62444

ADDITIONAL DATA


Pack size	50
Country of origin	CH
Tariff code	74199949
Weight	16.14 g

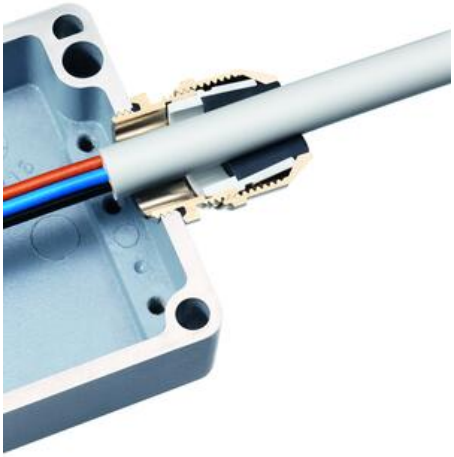








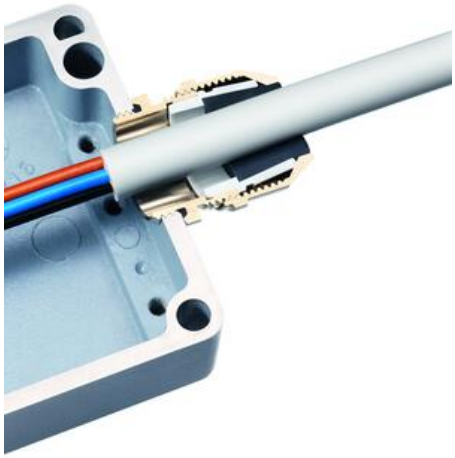



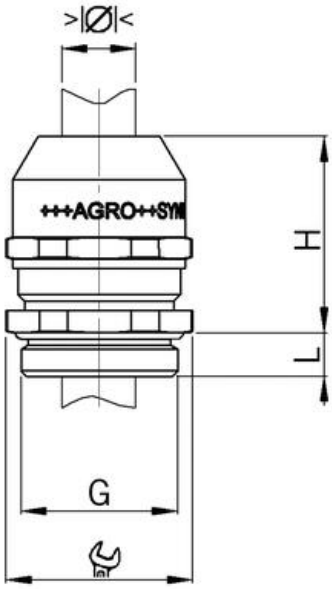


>|Ø|<
AGRO
H
L
G