


SYNTEC NICKEL PLATED BRASS

Syntec®

1045.20.080

Gland Syntec NPB, M20, ø3.5...8mm

- Trapezoidal strain relief
- Lamellar technology
- -40°C...+100°C
- Polyamide PA 6 insert
- IP68

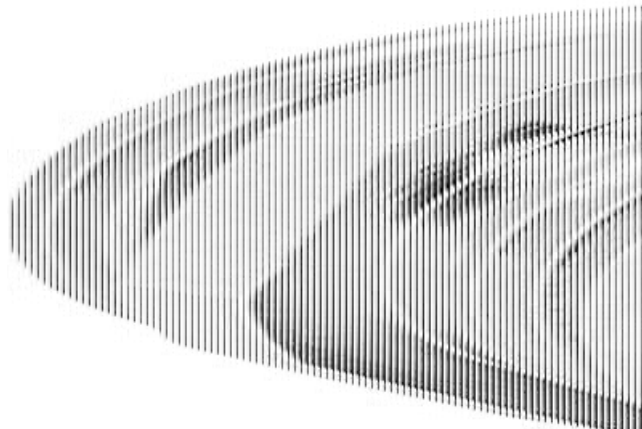

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Thread Size (G)	M20
Insert Type	One-Piece
Cable diameter min	3.5 mm
Cable diameter max	8 mm
IP class	IP 68

DIMENSIONS

Thread pitch	1.5
Thread length	6 mm
Height (H)	25 mm
Spanner width (AF)	22 mm

MATERIALS

Materials O-ring	NBR
Lamellar insert material	Polyamide
sealing ring material	TPE

Temperature range	-40°C ... +100°C
-------------------	------------------

APPROVALS

Approvals	CE, cRUus, DNV, EAC, VDE
Strain relief	Version A acc. to EN 62444

ADDITIONAL DATA

Pack size	50
Country of origin	CH
Tariff code	74199949
Weight	28.7 g

