


EMC - CONTACT SLEEVE

Progress® MS EMC

1080.07.075

Gland EMC NPB, sleeve, Pg 7, $\varnothing 6 \dots 7.5$ mm

- Permanent contact pressure
- 360° contact sleeve construction
- -40°C...+100°C
- IP68 up to 10 bar, IP69K

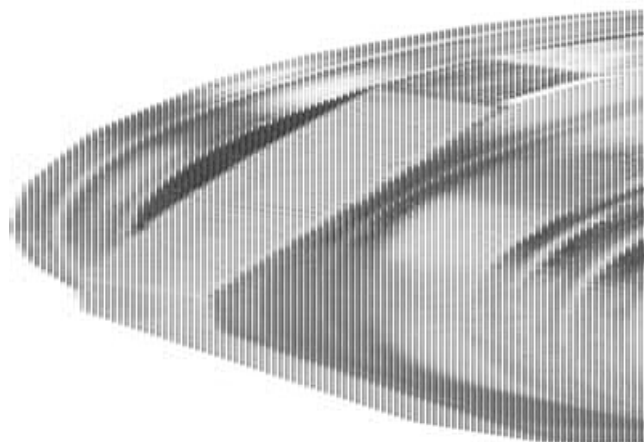

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Thread Size (G)	PG 7
Insert Type	One-Piece
Cable diameter min	6 mm
Cable diameter max	7.5 mm
IP class	IP 68 (up to 10 bar), IP 69 further protection

DIMENSIONS

Thread length	6 mm
Height (H)	20 mm
Spanner width (AF)	15 mm

MATERIALS

Material	Nickel-plated brass
Materials O-ring	NBR
Material of seals	TPE
Contact sleeve material	Nickel-plated brass

Temperature range	-40°C ... +100°C
-------------------	------------------

APPROVALS

Approvals	cRUus, EAC
-----------	------------

ADDITIONAL DATA

Pack size	50
Country of origin	CH
Tariff code	74199949
Weight	15.14 g