


EMC HIGH TEMPERATURE - CONTACT SLEEVE

Progress® MS EMC HT

1080.29.91.230
Gland EMC NPB, sleeve, High temp, Pg 29, ø19...
23mm

- Permanent contact pressure
- 360° contact sleeve construction
- -40°C...+200°C
- IP68 up to 10 bar, IP69K

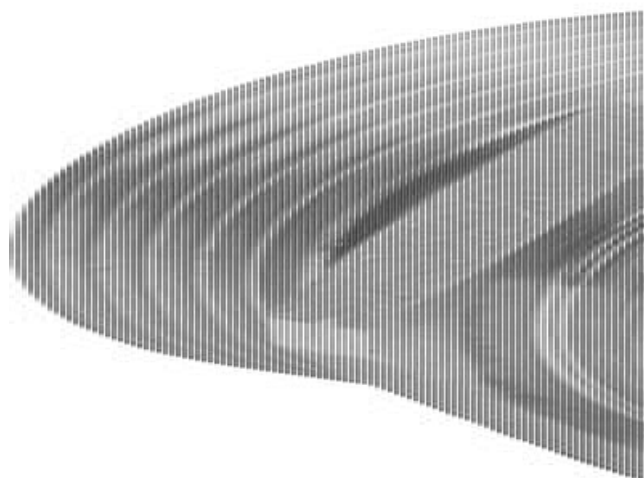

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Thread Size (G)	PG 29
Insert Type	One-Piece
Cable diameter min	19 mm
Cable diameter max	23 mm
IP class	IP 68 (up to 10 bar), IP 69 further protection

DIMENSIONS

Thread length	8 mm
Height (H)	33 mm
Spanner width (AF)	38 mm

MATERIALS

Material	Nickel-plated brass
Materials O-ring	FPM
Material of seals	FPM
Contact sleeve material	Nickel-plated brass

Temperature range	-40°C ... +200°C
-------------------	------------------

APPROVALS

Approvals	EAC
-----------	-----

ADDITIONAL DATA

Pack size	25
-----------	----

Country of origin	CH
-------------------	----

Tariff code	74199949
-------------	----------

Weight	132 g
--------	-------