


## EMC RAPID

### Progress® EMC Rapid

1081.32.210

Gland EMC Rapid, contact disc, M32, ø18...21mm

- Quick assembly
- Contact disc shield connection
- Low contact resistance
- -40°C...+100°C
- IP 68 up to 10 bar, IP69K

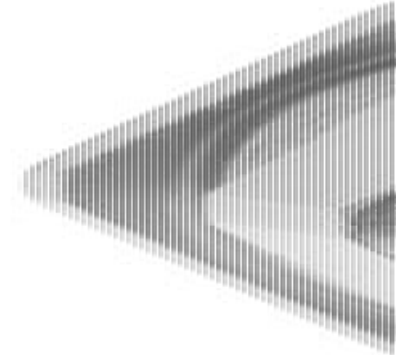

#### PRODUCT DESCRIPTION

#### TECHNICAL DATA

##### GENERAL DATA

Thread Size (G)	M32
Insert Type	One-Piece
Cable diameter min	18 mm
Cable diameter max	21 mm
IP class	IP 68 (up to 10 bar), IP 69 further protection

##### DIMENSIONS

Thread pitch	1.5
Thread length	8 mm
Height (H)	32 mm
Spanner width (AF)	36 mm

##### MATERIALS

Material	Nickel-plated brass
Materials O-ring	NBR
Material of seals	TPE

<b>Contact sleeve material</b>	Nickel-plated brass
<b>Contact disc material</b>	Stainless steel A2
<b>Temperature range</b>	-40°C ... +100°C

## APPROVALS

<b>Approvals</b>	SEV, CE, cRUus, DNV, EAC, VDE
<b>Strain relief</b>	Version A acc. to EN 62444

## ADDITIONAL DATA

<b>Pack size</b>	25
<b>Country of origin</b>	CH
<b>Tariff code</b>	74199949
<b>Weight</b>	106.72 g