


## EMC RAPID

### Progress® EMC Rapid

1081.25.190

Gland EMC Rapid, contact disc, M25, ø16...19mm

- Quick assembly
- Contact disc shield connection
- Low contact resistance
- -40°C...+100°C
- IP 68 up to 10 bar, IP69K

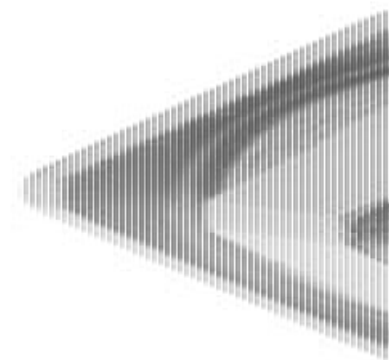

## PRODUCT DESCRIPTION

## TECHNICAL DATA

### GENERAL DATA

|                    |                                                |
|--------------------|------------------------------------------------|
| Thread Size (G)    | M25                                            |
| Insert Type        | One-Piece                                      |
| Cable diameter min | 16 mm                                          |
| Cable diameter max | 19 mm                                          |
| IP class           | IP 68 (up to 10 bar), IP 69 further protection |

### DIMENSIONS

|                    |       |
|--------------------|-------|
| Thread pitch       | 1.5   |
| Thread length      | 7 mm  |
| Height (H)         | 33 mm |
| Spanner width (AF) | 30 mm |

### MATERIALS

|                   |                     |
|-------------------|---------------------|
| Material          | Nickel-plated brass |
| Materials O-ring  | NBR                 |
| Material of seals | TPE                 |

|                         |                     |
|-------------------------|---------------------|
| Contact sleeve material | Nickel-plated brass |
| Contact disc material   | Stainless steel A2  |
| Temperature range       | -40°C ... +100°C    |

**APPROVALS**

|               |                               |
|---------------|-------------------------------|
| Approvals     | SEV, CE, cRUus, DNV, EAC, VDE |
| Strain relief | Version A acc. to EN 62444    |

**ADDITIONAL DATA**

|                   |          |
|-------------------|----------|
| Pack size         | 25       |
| Country of origin | CH       |
| Tariff code       | 74199949 |
| Weight            | 69.6 g   |