OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

SYNTEC NICKEL PLATED BRASS

Syntec®

1145.20.080
Gland Syntec NPB, M20, long, ø3.5…8mm



- Trapezoidal strain relief
- Lamellar technology
- -40°C…+100°C
- Polyamide PA 6 insert
- IP68

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Thread Size (G)	M20
Insert Type	One-Piece
Cable diameter min	3.5 mm
Cable diameter max	8 mm
IP class	IP 68

DIMENSIONS

Thread pitch	1.5
Thread length	12 mm
Height (H)	25 mm
Spanner width (AF)	22 mm

MATERIALS


Materials O-ring	NBR
Lamellar insert material	Polyamide
sealing ring material	TPE
Temperature range	-40°C ... +100°C

APPROVALS

Approvals	CE, cRUus, DNV, EAC, VDE
Strain relief	Version A acc. to EN 62444

ADDITIONAL DATA


Pack size	50
Country of origin	CH
Tariff code	74199949
Weight	32.6 g

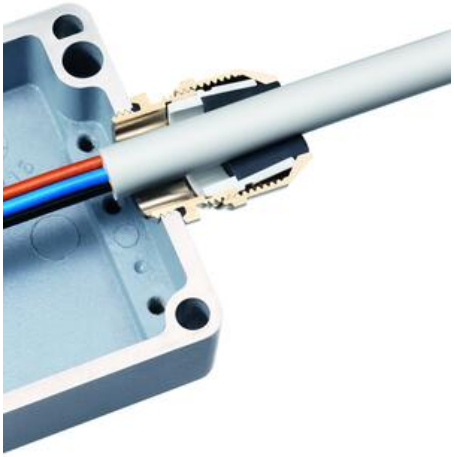








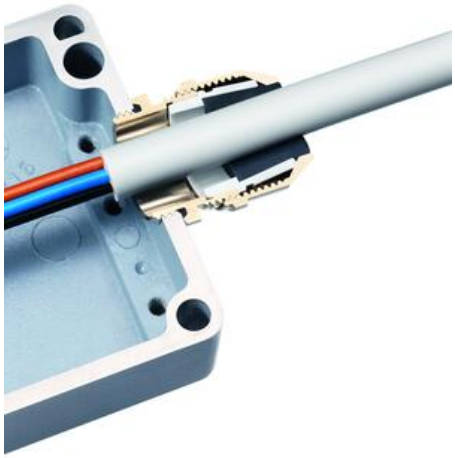



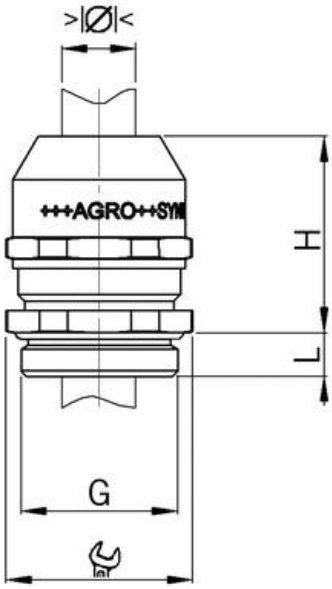


>|Ø|<
AGRO
H
L
G