OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

SYNTEC NICKEL PLATED BRASS

Syntec®

1145.17.100
Gland Syntec NPB, M16, long, ø4.5…10mm



- Trapezoidal strain relief
- Lamellar technology
- -40°C…+100°C
- Polyamide PA 6 insert
- IP68

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Thread Size (G)	M16
Insert Type	One-Piece
Cable diameter min	4.5 mm
Cable diameter max	10 mm
IP class	IP 68

DIMENSIONS

Thread pitch	1.5
Thread length	12 mm
Height (H)	20 mm
Spanner width (AF)	18 mm

MATERIALS


Materials O-ring	NBR
Lamellar insert material	Polyamide
sealing ring material	TPE
Temperature range	-40°C ... +100°C

APPROVALS

Approvals	CE, cRUus, DNV, EAC, VDE
Strain relief	Version A acc. to EN 62444

ADDITIONAL DATA


Pack size	50
Country of origin	CH
Tariff code	74199949
Weight	18.86 g

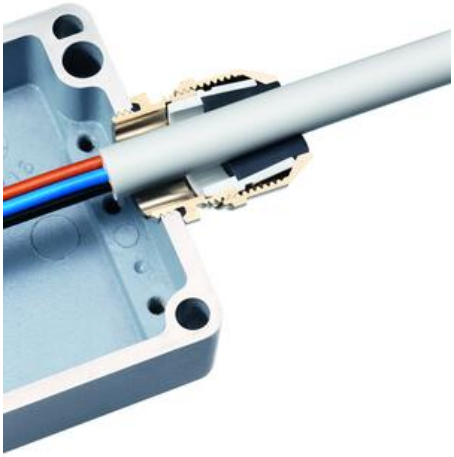








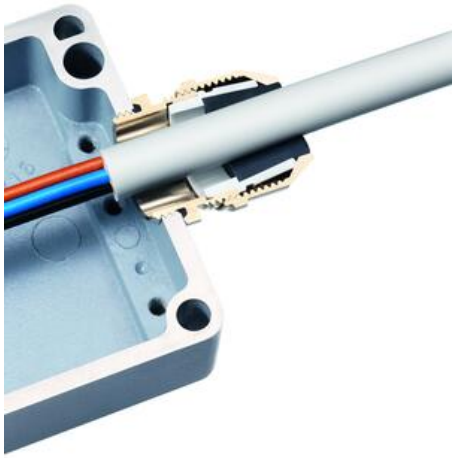



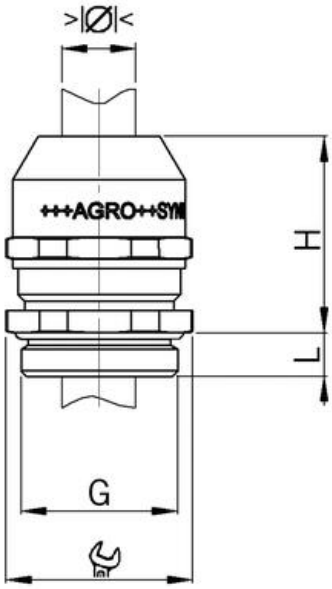


>|Ø|<
AGRO
H
L
G