


## EMC - CONTACT SLEEVE

Progress® MS EMC

1180.10.060

Gland EMC NPB, sleeve, M10, long, ø4...6mm

- Permanent contact pressure
- 360° contact sleeve construction
- -40°C...+100°C
- IP68 up to 10 bar, IP69K

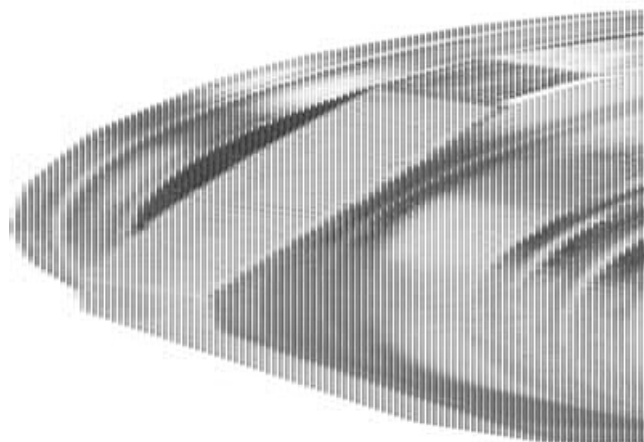

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

|                    |                                                |
|--------------------|------------------------------------------------|
| Thread Size (G)    | M10                                            |
| Insert Type        | One-Piece                                      |
| Cable diameter min | 4 mm                                           |
| Cable diameter max | 6 mm                                           |
| IP class           | IP 68 (up to 10 bar), IP 69 further protection |

#### DIMENSIONS

|                    |       |
|--------------------|-------|
| Thread pitch       | 1.5   |
| Thread length      | 10 mm |
| Height (H)         | 16 mm |
| Spanner width (AF) | 13 mm |

#### MATERIALS

|                   |                     |
|-------------------|---------------------|
| Material          | Nickel-plated brass |
| Materials O-ring  | NBR                 |
| Material of seals | TPE                 |

|                         |                     |
|-------------------------|---------------------|
| Contact sleeve material | Nickel-plated brass |
| Temperature range       | -40°C ... +100°C    |

APPROVALS

|               |                               |
|---------------|-------------------------------|
| Approvals     | SEV, CE, cRUus, DNV, EAC, VDE |
| Strain relief | Version A acc. to EN 62444    |

ADDITIONAL DATA

|                     |                                                   |
|---------------------|---------------------------------------------------|
| Pack size           | 50                                                |
| Country of origin   | CH                                                |
| Tariff code         | 74199949                                          |
| Weight              | 11.86 g                                           |
| Additional features | Metric coarse-pitch thread (with VDE test report) |