


## EMC HIGH TEMPERATURE - CONTACT SLEEVE

Progress® MS EMC HT

1180.17.91.080  
Gland EMC NPB, sleeve, High temp, M16, long, ø8...  
10mm

- Permanent contact pressure
- 360° contact sleeve construction
- -40°C...+200°C
- IP68 up to 10 bar, IP69K

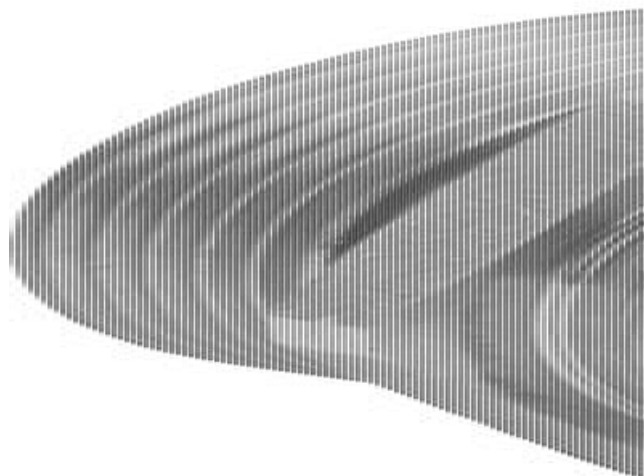

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

|                    |                                                |
|--------------------|------------------------------------------------|
| Thread Size (G)    | M16                                            |
| Insert Type        | One-Piece                                      |
| Cable diameter min | 6 mm                                           |
| Cable diameter max | 8 mm                                           |
| IP class           | IP 68 (up to 10 bar), IP 69 further protection |

#### DIMENSIONS

|                    |       |
|--------------------|-------|
| Thread pitch       | 1.5   |
| Thread length      | 10 mm |
| Height (H)         | 23 mm |
| Spanner width (AF) | 18 mm |

#### MATERIALS

|                   |                     |
|-------------------|---------------------|
| Material          | Nickel-plated brass |
| Materials O-ring  | FPM                 |
| Material of seals | FPM                 |

|                         |                     |
|-------------------------|---------------------|
| Contact sleeve material | Nickel-plated brass |
| Temperature range       | -40°C ... +200°C    |

APPROVALS

|               |                            |
|---------------|----------------------------|
| Approvals     | EAC                        |
| Strain relief | Version A acc. to EN 62444 |

ADDITIONAL DATA

|                   |          |
|-------------------|----------|
| Pack size         | 50       |
| Country of origin | CH       |
| Tariff code       | 74199949 |
| Weight            | 27.58 g  |