


## EMC - CONTACT SLEEVE

Progress® MS EMC

1180.07.075

Gland EMC NPB, sleeve, Pg 7, long,  $\varnothing 6 \dots 7.5$  mm

- Permanent contact pressure
- 360° contact sleeve construction
- -40°C...+100°C
- IP68 up to 10 bar, IP69K

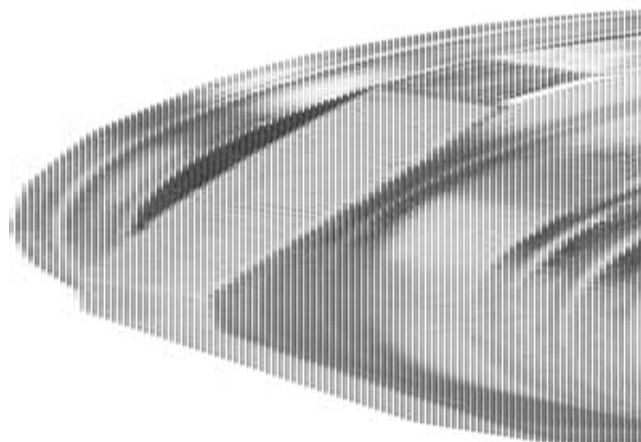

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

|                    |                                                |
|--------------------|------------------------------------------------|
| Thread Size (G)    | PG 7                                           |
| Insert Type        | One-Piece                                      |
| Cable diameter min | 6 mm                                           |
| Cable diameter max | 7.5 mm                                         |
| IP class           | IP 68 (up to 10 bar), IP 69 further protection |

#### DIMENSIONS

|                    |       |
|--------------------|-------|
| Thread length      | 10 mm |
| Height (H)         | 20 mm |
| Spanner width (AF) | 15 mm |

#### MATERIALS

|                         |                     |
|-------------------------|---------------------|
| Material                | Nickel-plated brass |
| Materials O-ring        | NBR                 |
| Material of seals       | TPE                 |
| Contact sleeve material | Nickel-plated brass |

|                   |                  |
|-------------------|------------------|
| Temperature range | -40°C ... +100°C |
|-------------------|------------------|

**APPROVALS**

|           |            |
|-----------|------------|
| Approvals | cRUus, EAC |
|-----------|------------|

**ADDITIONAL DATA**

|                   |          |
|-------------------|----------|
| Pack size         | 50       |
| Country of origin | CH       |
| Tariff code       | 74199949 |
| Weight            | 17.14 g  |