


## GENERAL PURPOSE GFK

### Progress® GFK

1540.32

Gland synthetic, black, M32, ø17...21mm

- Polyamide Glass Fibre Reinforced
- Halogen free
- -20°C...+100°C
- IP68

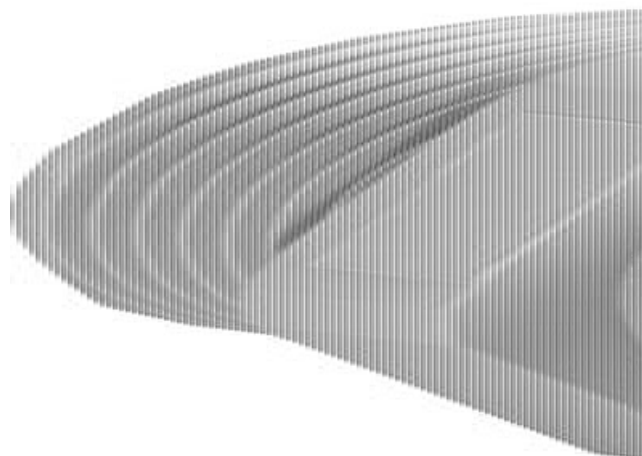

## PRODUCT DESCRIPTION

## TECHNICAL DATA

### GENERAL DATA

|                          |                |
|--------------------------|----------------|
| Thread Size (G)          | M32            |
| Insert Type              | Two-Piece      |
| Cable diameter inner min | 17 mm          |
| Cable diameter inner max | 21 mm          |
| Cable diameter min       | 21 mm          |
| Cable diameter max       | 25.5 mm        |
| IP class                 | IP 68          |
| Colour                   | Black RAL 9005 |

### DIMENSIONS

|                    |       |
|--------------------|-------|
| Thread pitch       | 1.5   |
| Thread length      | 15 mm |
| Height (H)         | 35 mm |
| Spanner width (AF) | 41 mm |

### MATERIALS

|                          |                                 |
|--------------------------|---------------------------------|
| <b>Material</b>          | Fiberglass reinforced polyamide |
| <b>Material of seals</b> | TPE                             |
| <b>Temperature range</b> | -20°C ... +100°C                |

**APPROVALS**

|                      |                            |
|----------------------|----------------------------|
| <b>Approvals</b>     | SEV, CE, DNV, EAC, VDE     |
| <b>Strain relief</b> | Version A acc. to EN 62444 |

**ADDITIONAL DATA**

|                          |          |
|--------------------------|----------|
| <b>Pack size</b>         | 25       |
| <b>Country of origin</b> | CH       |
| <b>Tariff code</b>       | 39269000 |
| <b>Weight</b>            | 43.32 g  |