**OEM Automatic Ltd**
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

# SYNTEC POLYAMIDE PA 6

Syntec®

1555.N0500.12
Gland Syntec synthetic, NPT 1/2, ø5.5…12mm



- Trapezoidal strain relief
- Lamellar technology
- -30°C…+100°C
- Halogen free
- IP68

**PRODUCT DESCRIPTION**

# TECHNICAL DATA

## GENERAL DATA

| | |
|---|---|
| **Thread Size (G)** | NPT 1/2" |
| **Insert Type** | One-Piece |
| **Cable diameter min** | 5.5 mm |
| **Cable diameter max** | 12 mm |
| **IP class** | IP 54, IP 68 further protection if entry thread is sealed |
| **Colour** | Grey RAL 7035 |

## DIMENSIONS

| | |
|---|---|
| **Thread length** | 15 mm |
| **Height (H)** | 26 mm |
| **Spanner width (AF)** | 24 mm |

## MATERIALS

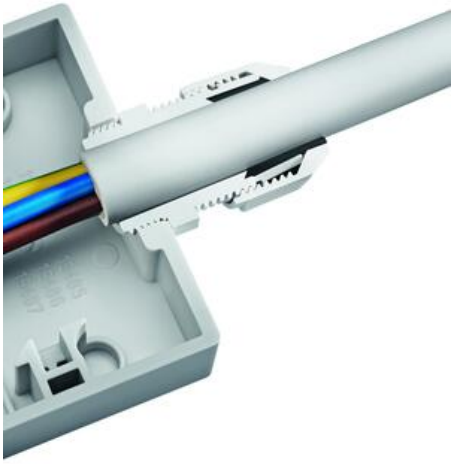
| | |
|---|---|
| **Material** | Polyamide |
| **sealing ring material** | Neoprene |
| **Temperature range** | -30°C ... +100°C |

## APPROVALS

| | |
|---|---|
| **Approvals** | cRUus, cULus, EAC |

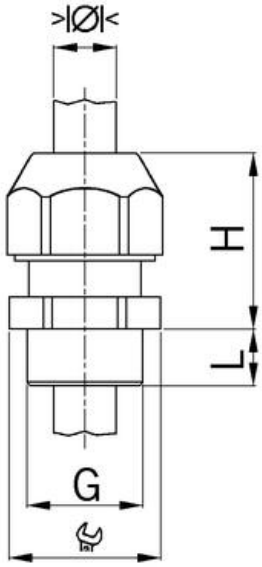
## ADDITIONAL DATA

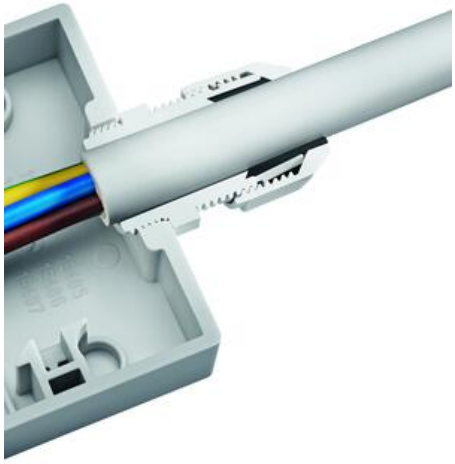
| | |
|---|---|
| **Pack size** | 50 |
| **Country of origin** | DE |
| **Tariff code** | 39269000 |
| **Weight** | 13.48 g |





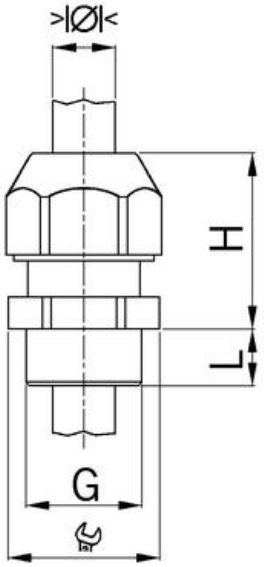









>IØI<
H
L
G