


## SYNTEC POLYAMIDE PA 6

Syntec®

1555.32.25

Gland Syntec synthetic, M32, ø17...25mm

- Trapezoidal strain relief
- Lamellar technology
- -30°C...+100°C
- Halogen free
- IP68

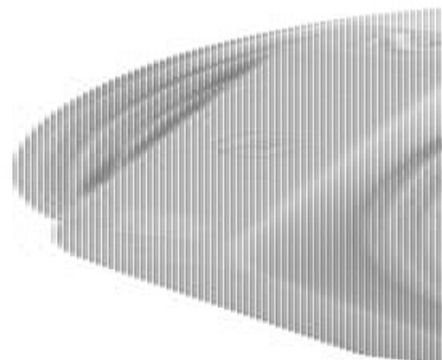

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

|                    |               |
|--------------------|---------------|
| Thread Size (G)    | M32           |
| Insert Type        | One-Piece     |
| Cable diameter min | 17 mm         |
| Cable diameter max | 25 mm         |
| IP class           | IP 68         |
| Colour             | Grey RAL 7035 |

#### DIMENSIONS

|                    |       |
|--------------------|-------|
| Thread pitch       | 1.5   |
| Thread length      | 10 mm |
| Height (H)         | 36 mm |
| Spanner width (AF) | 42 mm |

#### MATERIALS

|                       |           |
|-----------------------|-----------|
| Material              | Polyamide |
| sealing ring material | TPE       |

|                   |                  |
|-------------------|------------------|
| Temperature range | -30°C ... +100°C |
|-------------------|------------------|

## APPROVALS

|               |                                 |
|---------------|---------------------------------|
| Approvals     | CE, cRUus, cULus, DNV, EAC, VDE |
| Strain relief | Version A acc. to EN 62444      |

## ADDITIONAL DATA

|                   |          |
|-------------------|----------|
| Pack size         | 20       |
| Country of origin | DE       |
| Tariff code       | 39269000 |
| Weight            | 41.4 g   |

