


90° ELBOW GLANDS AND 45°/90° ELBOWS

Progress® Elbow

5210.12

Gland NPB, 90° elbow, M12, long, ø5...6.5mm

- Nickel plated brass
- Ideal for tight spaces
- thread adaptor versions
- -40°C...+100°C
- up to IP68

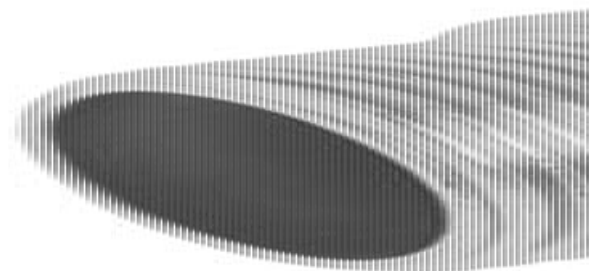

PRODUCT DESCRIPTION

The popular Progress® range of nickel-plated brass are also available with 90° elbow, so ideal for tight spaces.

In addition to the glands, there are also a range of 90° and 45° elbows with internal & external threads to give additional flexibility.

TECHNICAL DATA

GENERAL DATA

| | |
|--------------------|-----------|
| Thread Size (G) | M12 |
| Insert Type | One-Piece |
| Cable diameter min | 5 mm |
| Cable diameter max | 6.5 mm |
| IP class | IP 68 |

DIMENSIONS

| | |
|--------------------|-------|
| Thread pitch | 1.5 |
| Thread length | 12 mm |
| Height (H) | 30 mm |
| Spanner width (AF) | 15 mm |
| Width (B) | 32 mm |
| Centres (A) | 11 mm |

MATERIALS

| | |
|-------------------|---------------------|
| Material | Nickel-plated brass |
| Material of seals | TPE |
| Temperature range | -40°C ... +100°C |

APPROVALS

| | |
|-----------------------|----------------------------------|
| Approvals | SEV, CE, DNV, EAC, VDE |
| Strain relief | Version A acc. to EN 62444 |
| Entry thread IP class | IP 68, if entry thread is sealed |

ADDITIONAL DATA

| | |
|-------------------|----------|
| Pack size | 50 |
| Country of origin | CH |
| Tariff code | 74199949 |
| Weight | 24.42 g |

