


## 90° ELBOW GLANDS AND 45°/90° ELBOWS

Progress® Elbow

5215.40

Gland NPB, 90° elbow, M40, long, locknut, ø24...33mm

- Nickel plated brass
- Ideal for tight spaces
- thread adaptor versions
- -40°C...+100°C
- up to IP68

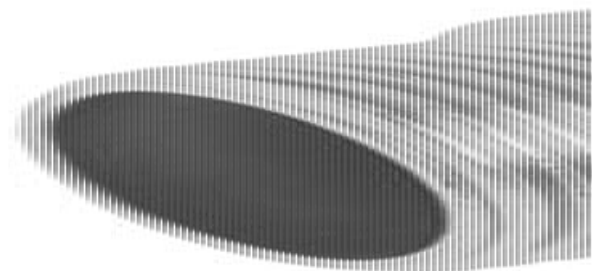

### PRODUCT DESCRIPTION

The popular Progress® range of nickel-plated brass are also available with 90° elbow, so ideal for tight spaces.

In addition to the glands, there are also a range of 90° and 45° elbows with internal & external threads to give additional flexibility.

## TECHNICAL DATA

### GENERAL DATA

Thread Size (G)	M40
Insert Type	Two-Piece
Cable diameter inner min	24 mm
Cable diameter inner max	28.5 mm
Cable diameter min	28.5 mm
Cable diameter max	33 mm
IP class	IP 68

### DIMENSIONS

Thread pitch	1.5
Thread length	16 mm
Height (H)	66 mm
Spanner width (AF)	46 mm

Width (B)	72 mm
Centres (A)	28 mm

**MATERIALS**

Material	Nickel-plated brass
Materials O-ring	NBR
Material of seals	TPE
Temperature range	-40°C ... +100°C

**APPROVALS**

Approvals	SEV, CE, DNV, EAC, VDE
Strain relief	Version A acc. to EN 62444
Entry thread IP class	IP 68, if entry thread is sealed

**ADDITIONAL DATA**

Pack size	10
Country of origin	CH
Tariff code	74199949
Weight	351.2 g