


NICKEL PLATED EX E II - CONTACT SLEEVE

Progress® MS EX

EX1000.40.285
Gland Ex NPB, Ex e II, M40, ø24...28.5mm

- Ex e II
- -60°...+100°C
- IECEx approvals
- IP68 up to 10 bar

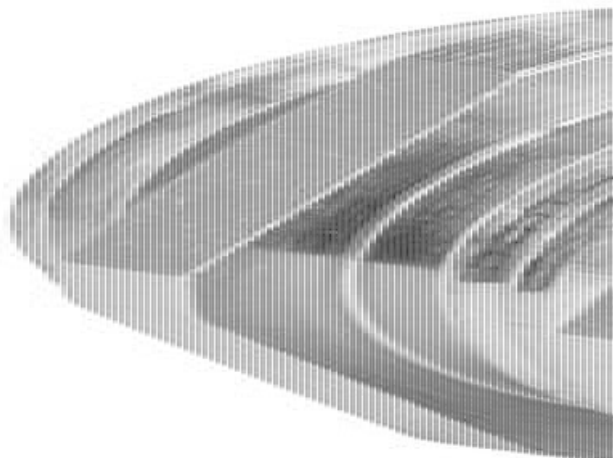

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Thread Size (G)	M40
Insert Type	One-Piece
Cable diameter min	24 mm
Cable diameter max	28.5 mm
IP class	IP 66 / IP 68 (up to 10 bar)

DIMENSIONS

Thread pitch	1.5
Thread length	8 mm
Height (H)	31 mm
Spanner width (AF)	46 mm

MATERIALS

Material	Nickel-plated brass
Materials O-ring	FPM
Material of seals	TPE

Temperature range	-60°C ... +100°C
-------------------	------------------

APPROVALS

Approvals	CE, DNV, EX, IECEx
Test standard	IEC EN 60079-0 / IEC EN 60079-7 / IEC EN 60079-31
Ex zones	Gas 1 and 2 / dust 21 and 22
Ex-Zone gas	II 2G Ex eb IIC Gb
EX-zone dust	II 2D Ex tb IIC Db
IECEX certificate	IECEX SEV 15.0019X
Certificate	SEV 15 ATEX 0152X

ADDITIONAL DATA

Pack size	10
Country of origin	CH
Tariff code	74199949
Weight	157 g

