


## SYNTHETIC GFK EX - EX E II, EX I II

Progress GFK Ex

EX1530.40.285

Gland Ex synthetic, Ex e II, Ex i II, blue, M40, ø27...  
28.5mm

- Ex e II, Ex i II
- Intrinsically Safe - Blue
- -20°C...+85°C
- IECEx approved
- IP66/IP68 up to 10 bar

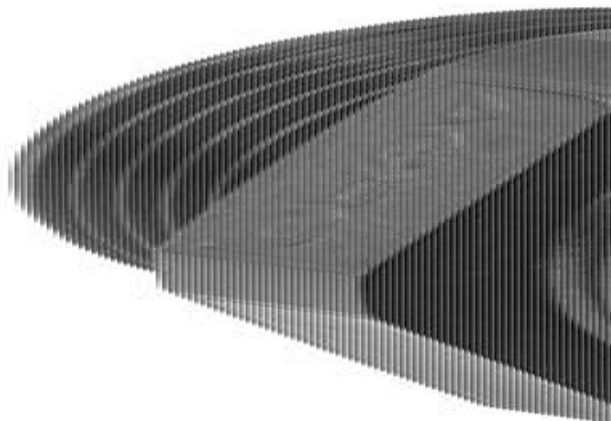

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

|                    |                              |
|--------------------|------------------------------|
| Thread Size (G)    | M40                          |
| Insert Type        | One-Piece                    |
| Cable diameter min | 27 mm                        |
| Cable diameter max | 28.5 mm                      |
| IP class           | IP 66 / IP 68 (up to 10 bar) |
| Colour             | Black / light blue           |

#### DIMENSIONS

|                    |       |
|--------------------|-------|
| Thread pitch       | 1.5   |
| Thread length      | 15 mm |
| Height (H)         | 40 mm |
| Spanner width (AF) | 50 mm |

#### MATERIALS

|                   |                                 |
|-------------------|---------------------------------|
| Material          | Fiberglass reinforced polyamide |
| Material of seals | NBR, TPE                        |

|                   |                 |
|-------------------|-----------------|
| Temperature range | -20°C ... +85°C |
|-------------------|-----------------|

## APPROVALS

|                       |                                                   |
|-----------------------|---------------------------------------------------|
| Approvals             | CE, DNV, EX, IECEx                                |
| Test standard         | IEC EN 60079-0 / IEC EN 60079-7 / IEC EN 60079-31 |
| Ex zones              | Gas 0, 1 and 2 / dust 20, 21 and 22               |
| Ex-Zone gas           | II 2G Ex eb IIC Gb                                |
| EX-zone dust          | II 2D Ex tb IIIC Db                               |
| Intrinsic safety gas  | II 2G Ex ia IIC Ga                                |
| Intrinsic safety dust | II 2D Ex ia IIIC Da                               |
| IECEx certificate     | IECEx SEV 15.0019X                                |
| Certificate           | SEV 15 ATEX 0152X                                 |

## ADDITIONAL DATA

|                   |          |
|-------------------|----------|
| Pack size         | 10       |
| Country of origin | CH       |
| Tariff code       | 39269000 |
| Weight            | 73.32 g  |