

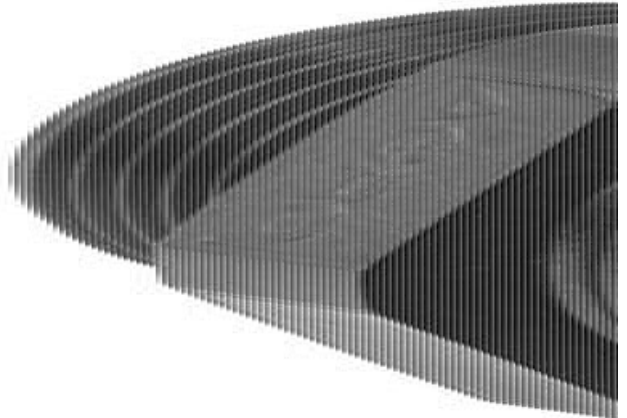
SYNTHETIC GFK EX - EX E II, EX I II

Progress GFK Ex

EX1530.40.270

Gland Ex synthetic, Ex e II, Ex i II, blue, M40, ø25.5...
27mm

- Ex e II, Ex i II
- Intrinsically Safe - Blue
- -20°C...+85°C
- IECEx approved
- IP66/IP68 up to 10 bar

**PRODUCT DESCRIPTION****TECHNICAL DATA****GENERAL DATA**

Thread Size (G)	M40
Insert Type	One-Piece
Cable diameter min	25.5 mm
Cable diameter max	27 mm
IP class	IP 66 / IP 68 (up to 10 bar)
Colour	Black / light blue

DIMENSIONS

Thread pitch	1.5
Thread length	15 mm
Height (H)	40 mm
Spanner width (AF)	50 mm

MATERIALS

Material	Fiberglass reinforced polyamide
Material of seals	NBR, TPE

Temperature range	-20°C ... +85°C
-------------------	-----------------

APPROVALS

Approvals	CE, DNV, EX, IECEx
-----------	--------------------

Test standard	IEC EN 60079-0 / IEC EN 60079-7 / IEC EN 60079-31
---------------	---

Ex zones	Gas 0, 1 and 2 / dust 20, 21 and 22
----------	-------------------------------------

Ex-Zone gas	II 2G Ex eb IIC Gb
-------------	--------------------

EX-zone dust	II 2D Ex tb IIIC Db
--------------	---------------------

Intrinsic safety gas	II 2G Ex ia IIC Ga
----------------------	--------------------

Intrinsic safety dust	II 2D Ex ia IIIC Da
-----------------------	---------------------

IECEX certificate	IECEX SEV 15.0019X
-------------------	--------------------

Certificate	SEV 15 ATEX 0152X
-------------	-------------------

ADDITIONAL DATA

Pack size	10
-----------	----

Country of origin	CH
-------------------	----

Tariff code	39269000
-------------	----------

Weight	72.6 g
--------	--------