


## SYNTHETIC GFK EX E II

Progress® GFK Ex

EX1571.36.350

Gland Ex synthetic, Ex e II, Pg 36, ø32.5...35mm

- Ex e II
- -20°C...+85°C
- IECEx approved
- IP66/IP68 up to 10 bar

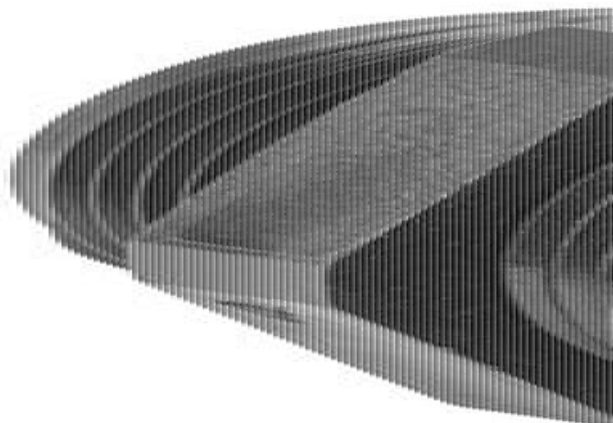

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

|                    |               |
|--------------------|---------------|
| Thread Size (G)    | PG 36         |
| Insert Type        | One-Piece     |
| Cable diameter min | 32.5 mm       |
| Cable diameter max | 35 mm         |
| IP class           | IP 66 / IP 68 |
| Colour             | Grey RAL 7035 |

#### DIMENSIONS

|                    |       |
|--------------------|-------|
| Thread length      | 16 mm |
| Height (H)         | 42 mm |
| Spanner width (AF) | 55 mm |

#### MATERIALS

|                   |                                 |
|-------------------|---------------------------------|
| Material          | Fiberglass reinforced polyamide |
| Material of seals | NBR, TPE                        |
| Temperature range | -20°C ... +85°C                 |

APPROVALS

|                   |                                                   |
|-------------------|---------------------------------------------------|
| Approvals         | CE, DNV, EX, IECEx                                |
| Test standard     | IEC EN 60079-0 / IEC EN 60079-7 / IEC EN 60079-31 |
| Ex zones          | Gas 1 and 2 / dust 21 and 22                      |
| Ex-Zone gas       | II 2G Ex eb IIC Gb                                |
| EX-zone dust      | II 2D Ex tb IIIC Db                               |
| IECEx certificate | IECEx SEV 15.0019X                                |
| Certificate       | SEV 15 ATEX 0152X                                 |

ADDITIONAL DATA

|                   |          |
|-------------------|----------|
| Pack size         | 10       |
| Country of origin | CH       |
| Tariff code       | 39269000 |
| Weight            | 86.6 g   |