


SYNTHETIC GFK EX E II

Progress® GFK Ex

EX1571.29.6.065

Gland Ex synthetic, Ex e II, Pg 29, multi, 6 x ø5.5...
6.5mm

- Ex e II
- -20°C...+85°C
- IECEx approved
- IP66/IP68 up to 10 bar

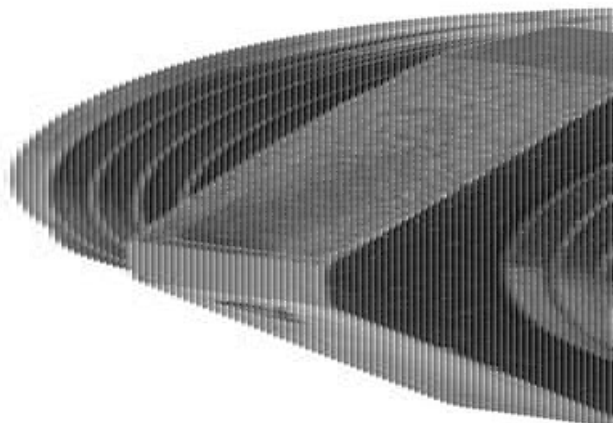

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Thread Size (G)	PG 29
Insert Type	One-Piece
Cable diameter min	5.5 mm
Cable diameter max	6.5 mm
Number of cables	6
IP class	IP 66 / IP 68
Colour	Grey RAL 7035

DIMENSIONS

Thread length	13 mm
Height (H)	36 mm
Spanner width (AF)	41 mm

MATERIALS

Material	Fiberglass reinforced polyamide
Material of seals	NBR

Temperature range	-20°C ... +85°C
-------------------	-----------------

APPROVALS

Approvals	CE, DNV, EX, IECEx
-----------	--------------------

Test standard	IEC EN 60079-0 / IEC EN 60079-7 / IEC EN 60079-31
---------------	---

Ex zones	Gas 1 and 2 / dust 21 and 22
----------	------------------------------

Ex-Zone gas	II 2G Ex eb IIC Gb
-------------	--------------------

EX-zone dust	II 2D Ex tb IIIC Db
--------------	---------------------

IECEx certificate	IECEx SEV 15.0019X
-------------------	--------------------

Certificate	SEV 15 ATEX 0152X
-------------	-------------------

ADDITIONAL DATA

Pack size	25
-----------	----

Country of origin	CH
-------------------	----

Tariff code	39269000
-------------	----------

Weight	52.2 g
--------	--------