


FLAMEPROOF COMPACT NICKEL PLATED

Flameproof Compact

EX1826.25.180

Gland Ex Compact NPB, clamped, Ex d IIC, Ex e II,
M25, ø15.5...18mm

- Ex d IIC/ Ex e II
- -60°C...+105°C
- Clamped versions
- IECEx approved
- IP68 up to 30 bar

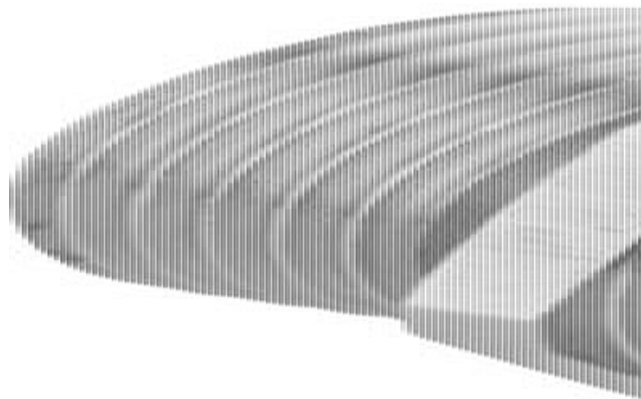

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Thread Size (G)	M25
Insert Type	One-Piece
Cable diameter min	12.5 mm
Cable diameter max	18 mm
IP class	IP 68 (30 bar)

DIMENSIONS

Thread pitch	1.5
Thread length	12 mm
Height (H)	37 mm
Spanner width (AF)	32 mm

MATERIALS

Material	Nickel-plated brass
Materials O-ring	FPM
Material of seals	NBR

Temperature range	-60°C ... +105°C
-------------------	------------------

APPROVALS

Approvals	CE, EX, IECEx
Test standard	IEC EN 60079-0 / IEC EN 60079-1 / IEC EN 60079-7 / IEC EN 60079-31
Ex zones	Gas 1 and 2 / dust 21 and 22
Ex-Zone gas	II 2G Ex db eb IIC Gb
EX-zone dust	II 2D Ex tb IIC Db
IECEx certificate	IECEx SEV 17.0017
Certificate	SEV 17 ATEX 0153

ADDITIONAL DATA

Pack size	20
Country of origin	CH
Tariff code	74199949
Weight	142.3 g

