

MINIMOTOR ACF COAXIAL GEAR MOTORS

ACF2T2B3-11.4
230/400V 3 ph 11.4rpm 5Nm B3 mount

- For clean environments
- IP67 as standard
- Up to 5Nm rated torque
- Minimal dirt trap points
- Epoxy coated with no external fan



PRODUCT DESCRIPTION

COAXIAL GEARED MOTOR

White epoxy coating for increased protection against chemicals and harsh working environments.
IP67 rated with no external fan.

MOTOR: Asynchronous three-phase motor with 2 poles, totally Class H winding in accordance with CEI EN 60034-1. .

GEAR UNIT: With casing in die-cast aluminium. Case-hardened and hardened bearings, output shaft in stainless steel on request. Lubrication with long-lasting oil (not toxic).


15 gear ratios (i) available, from 7,4 to 441,9. Rated torque from 0,8 to 5 Nm. Version B3 or B5.

The standard ACE version is also available with IP67 called ACEF

[Please click here for 2D and 3D drawings](#)

TECHNICAL DATA

4967_Rated current (A)	0.30Δ/0.17Y
Input voltage ac	230Δ/400Y
IP class	IP67
Nominal speed	11.4 rpm
Nominal torque	5
Output power	31 W
Ratio	245.5:1

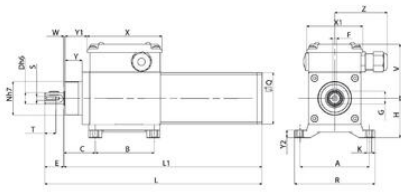

B3

	A	B	C	D	E	F	G	H	K	L	L1	N	Q	R	S	T	V	X	X1	Y	Y1	Y2	W	Z	Part weight approx. From kg
AC2P2D	74	63	33,5	12	20,5	4	13,6	43	5	29,5	212	26	35	86	M4	12	60	60	18	25	8	2	67	2,400	

AC2 model section

Please see product description above for 2D and 3D drawings

AC2 model section

Please see product description above for 2D and 3D drawings