

## MINIMOTOR ACF COAXIAL GEAR MOTORS

ACF2T2B3-11.4  
230/400V 3 ph 11.4rpm 5Nm B3 mount

- For clean environments
- IP67 as standard
- Up to 5Nm rated torque
- Minimal dirt trap points
- Epoxy coated with no external fan



### PRODUCT DESCRIPTION

COAXIAL GEARED MOTOR

White epoxy coating for increased protection against chemicals and harsh working environments.  
IP67 rated with no external fan.

MOTOR: Asynchronous three-phase motor with 2 poles, totally Class H winding in accordance with CEI EN 60034-1. .

GEAR UNIT: With casing in die-cast aluminium. Case-hardened and hardened bearings, output shaft in stainless steel on request. Lubrication with long-lasting oil (not toxic).


15 gear ratios (i) available, from 7,4 to 441,9. Rated torque from 0,8 to 5 Nm. Version B3 or B5.

The standard ACE version is also available with IP67 called ACEF

[Please click here for 2D and 3D drawings](#)

### TECHNICAL DATA

4967_Rated current (A)	0.30Δ/0.17Y
Input voltage ac	230Δ/400Y
IP class	IP67
Nominal speed	11.4 rpm
Nominal torque	5
Output power	31 W
Ratio	245.5:1

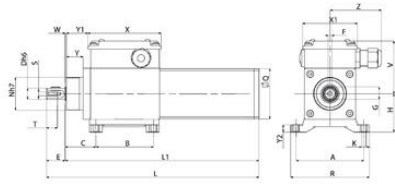

B3

	A	B	C	D	E	F	G	H	K	L	L1	N	Q	R	S	T	V	X	X1	Y	Y1	Y2	W	Z	
ACPTZ	74	63	33,5	12	20,5	4	13,6	43	5	32,3	212	36	55	86	144	12	60	80	60	18	25	8	2	87	2,400

2D model selection



Electric motor

15.06.2017



Geared motor

15.06.2017



Worm gear motors

15.06.2017



Brushless servomotors

15.06.2017



Clean products

15.06.2017



Drives

Please see product description above for 2D and 3D drawings

3D model selection



Electric motor

15.06.2017



Geared motor

15.06.2017



Worm gear motors

15.06.2017



Brushless servomotors

15.06.2017



Clean products

15.06.2017



Drives

Please see product description above for 2D and 3D drawings