


## MINIMOTOR MCFBS WORM GEAR MOTOR

MCFBS 55/50-15 B3  
230V 200rpm 4.1 Nm B3 mount

- For clean environments
- IP67 as standard
- Up to 13Nm rated torque
- 4 pole brushless motor
- Fitted with sealed connector

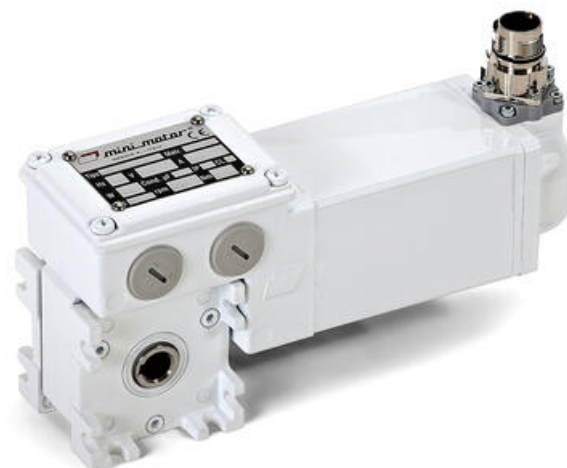

### PRODUCT DESCRIPTION

White epoxy coating for increased protection against chemicals and harsh working environments.  
IP67 rated with no external fan.

MOTOR: 4 poles sinusoidal brushless motor, totally enclosed. Rotor with NdFeB magnets. Safety circuit breaker. Class H winding in accordance with CEI EN 60034-1. IP67 standard protection in accordance with CEI EN 60529. Feedback with 2 pole resolver. Reduced clearance bearings with special grease for high temperatures.


GEARUNIT: with die-cast aluminium casing. Centre distance 26 mm. CARO bronze ring, 120÷160 HB hardness. Worm gear in hardened steel with grinding thread rotating on ball and roller bearings, output shaft in stainless steel on request.

Lubrication with special long-lasting oil. Sealing rings made in special rubber for high temperatures. 10 gear ratios (i) available, from 5 to 80. Rated torque 9 Nm. Version B3 or B5. B5/S left version - B5/D right version.

[Please click here for 2D and 3D drawings](#)

### TECHNICAL DATA

Nominal speed	200 rpm
Nominal torque	4.4
Ratio	15:1

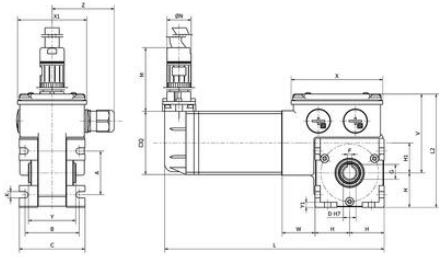

B3

Motor Type	A	B	C	D	F	G	H	H1	K	L	L2	Q	V	X	X1	Y	Y1	W	Z	Note: Mounting bracket from B3
MOFBS 55/90	38	47	58	11	4	12,8	30	26	5,5	190,5	99	55	69	80	60	41	4,5	28,5	56	1,90

**CM model selection**



Electric motors

15.06.2017



Gear motor

15.06.2017



Worm gearmotors

15.06.2017



Brushless servomotors

15.06.2017



Clean products

15.06.2017



Drives

15.06.2017

Please see product description above for 2D and 3D drawings

**CM model selection**



Electric motors

15.06.2017



Gear motor

15.06.2017



Worm gearmotors

15.06.2017



Brushless servomotors

15.06.2017



Clean products

15.06.2017



Drives

15.06.2017

Please see product description above for 2D and 3D drawings