

MINIMOTOR PAF COAXIAL GEAR MOTORS

PAF4T2B5-159
230/400V 3 ph 159rpm 7.3 Nm B5 mount

- For clean environments
- IP67 as standard
- Up to 20Nm rated torque
- Minimal dirt trap points
- Epoxy coated with no external fan



PRODUCT DESCRIPTION

COAXIAL GEARED MOTOR

White epoxy coating for increased protection against chemicals and harsh working environments.
IP67 rated with no external fan.

MOTOR: Asynchronous three-phase motor with 2 poles, totally Class H winding in accordance with CEI EN 60034-1.

GEAR UNIT: With casing in die-cast aluminium. Case-hardened and hardened bearings, output shaft in stainless steel on request. Lubrication with long-lasting oil (not toxic).




15 gear ratios (i) available, from 6.48 to 372.8. Rated torque from 2.8 to 20 Nm. Version B3 or B5.

The standard PAE version is also available with IP67 called PAEF

[Please click here for 2D and 3D drawings](#)

TECHNICAL DATA

4967_Rated current (A)	0.65Δ/0.38Y
Input voltage ac	230Δ/400Y
IP class	IP67
Nominal speed	159 rpm
Nominal torque	7.3
Output power	130 W
Ratio	17.6:1

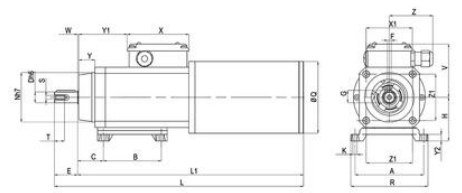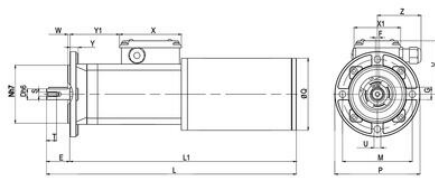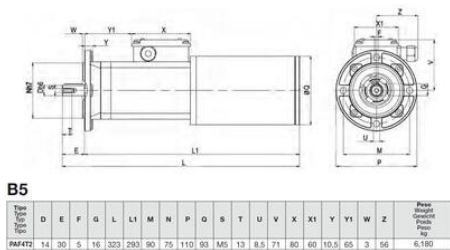

COU model selection

Electric motors
15.06.2017

Inverted motor
15.06.2017



Worm gearmotors
15.06.2017

Brushless servomotors
15.06.2017

Clean products
15.06.2017

Others

Please see product description above for 2D and 3D drawings

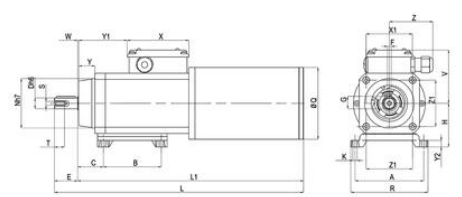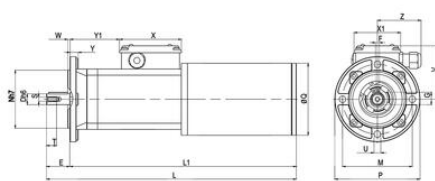

COU model selection

Electric motors
15.06.2017

Inverted motor
15.06.2017

Worm gearmotors
15.06.2017

Brushless servomotors
15.06.2017

Clean products
15.06.2017

Others

Please see product description above for 2D and 3D drawings