

MINIMOTOR - PCEF WORM GEARED MOTOR WITH FURTHER PLANETARY GEAR

PCEF4T2B5-20

- For clean environments
- IP67 as standard
- Up to 90Nm rated torque
- Minimal dirt trap points
- Epoxy coated with no external fan



PRODUCT DESCRIPTION

White epoxy coating for increased protection against chemicals and harsh working environments.
IP67 rated with no external fan.


MOTOR: Asynchronous single or three phase with 2 poles, totally enclosed. Thermal safety feature. Class H winding.

GEAR UNIT: Die-cast aluminium casing in the first reduction stage, with worm screw and steel casing in the second planetary stage, with three internal planetary gears. Wheel rim in bronze 120-160 HB hardness. Hardened steel screw with ground threads rotating on ball and roller bearings. Output shaft available in stainless steel upon request.

Lubrication with special long life oil. Sealing rings made in special rubber for high temperatures. . Rated torque 90 Nm. Version B3 or B5. B5/S left version - B5/D right version.

TECHNICAL DATA


Input voltage ac	230Δ/400Y
IP class	IP67
Nominal speed	20 rpm
Nominal torque	46
Output power	130 W
Rated current	0.65Δ/0.38Y
Ratio	142.5:1

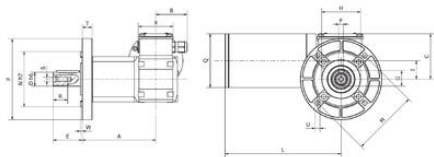

B5/S


Type Type Type Type	A	B	C	D	E	F	G	H	I	L	M	N	P	Q	R	S	T	U	V	W	X	Peak Weight Gross Peak kg
PCE4 4T2	127	56	80	24	50	8	27	67	32	200	115	95	140	93	25	M8	17	9	3	60	8,400	
PCE4 5T2	127	56	80	24	50	8	27	67	32	222	115	95	140	130	25	M8	17	9	3	60	13,800	

CEC model selection




Electric motor

15.06.2017



Gear motor

15.06.2017




Worm gear motor

15.06.2017




Brushless servomotor

15.06.2017



Clean products

15.06.2017



Drives

Please see product description
above for 2D and 3D drawings

CAD model selection



Electric motor

15.06.2017



Gear motor

15.06.2017



Worm gear motor

15.06.2017



Brushless servomotor

15.06.2017



Clean products

15.06.2017



Drives

Please see product description
above for 2D and 3D drawings