

## MINIMOTOR - PAE - COAXIAL GEAR MOTOR WITH ADITIONAL PLANETARY GEAR

PAE 140M2TB3-16.5  
 230/400V 3 ph 16.5rpm 18 Nm B3 mount



- Single or three phase
- 34 to 180W delivered power
- Up to 90Nm rated torque
- B3 foot or B5 flange mounting
- IP65 as standard

### PRODUCT DESCRIPTION

High quality, designed from the ground up to IP65 rated compact gear motor.

Physically smaller than the majority of similar powered gear motors due to the use of high quality components in precision manufacturing.

Ideally suited to many applications, including label and packaging machines, conveyors, pharmaceutical and medical machinery


**MOTOR:** Asynchronous single or three phase with 2 or 4 poles, totally enclosed with external ventilation. Thermal safety cutout on single phase model. Class F winding. IP65 protection according to CEI EN 60529.

**GEAR UNIT:** First stage with die-cast aluminium casing, second stage in steel. Case-hardened and hardened gear pairs with shafts rotating on roller bearings. Lubrication with long life oil. Sealing rings made in special rubber for high temperatures. 13 gear ratios (i) available, from 48.7 to 1770.9. Rated torque 90 Nm. Version B3 or B5.

[Please click here for 2D and 3D drawings](#)

## TECHNICAL DATA

|                        |             |
|------------------------|-------------|
| 4967_Rated current (A) | 0.33Δ/0.19Y |
| Input voltage ac       | 230/400V    |
| Nominal speed          | 16.5 rpm    |
| Nominal torque         | 18          |
| Output power           | 38 W        |
| Ratio                  | 83.6:1      |

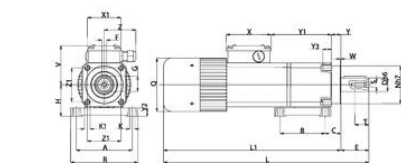

**B3**

| Type   | A   | B  | C  | D  | E  | F | G  | H  | K | K1        | L  | L1 | N   | R  | S  | T  | Y  | X  | X1 | Y1  | V2 | V3 | W  | Z  | Z1    | Price |
|--------|-----|----|----|----|----|---|----|----|---|-----------|----|----|-----|----|----|----|----|----|----|-----|----|----|----|----|-------|-------|
| PAE_M2 | 100 | 80 | 28 | 24 | 50 | 8 | 27 | 56 | 9 | M10267317 | 67 | 95 | 120 | M8 | 22 | 71 | 80 | 60 | 17 | 108 | 15 | 1  | 56 | 60 | 6,990 |       |
| PAE_M3 | 100 | 80 | 28 | 24 | 50 | 8 | 27 | 56 | 9 | M10390342 | 67 | 95 | 120 | M8 | 22 | 71 | 80 | 60 | 17 | 108 | 15 | 1  | 56 | 60 | 7,750 |       |

**LDI model selection**

|                |                |                 |                       |                 |
|----------------|----------------|-----------------|-----------------------|-----------------|
|                |                |                 |                       |                 |
| Electric motor | Inverted motor | Worm gearmotors | Brushless servomotors | Direct products |

15.06.2017

**LDI model selection**

|                |                |                 |                       |                 |
|----------------|----------------|-----------------|-----------------------|-----------------|
|                |                |                 |                       |                 |
| Electric motor | Inverted motor | Worm gearmotors | Brushless servomotors | Direct products |

15.06.2017

**LDI model selection**

|        |
|--------|
|        |
| Direct |

15.06.2017

Please see product description above for 2D and 3D drawings

**LDI model selection**

|        |
|--------|
|        |
| Direct |

15.06.2017

Please see product description above for 2D and 3D drawings

