


## EARTH TERMINALS - PSL 1.5-10MM

PSL

27013.2

PSL 4/2A, 4mm<sup>2</sup> Push-in Earth feed through

- Snap on
- 2 to 4 connections
- Pluggable cross connectors
- Push button cable release
- Test pick off point

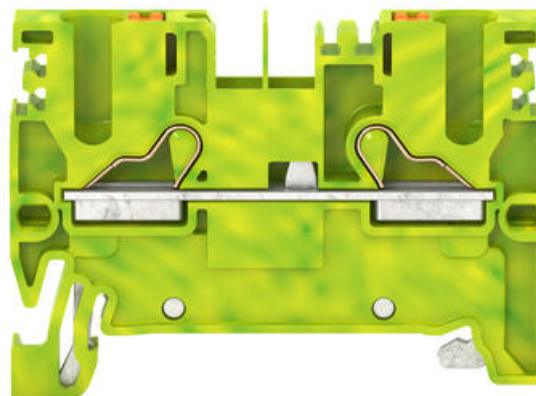

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

Rated wire cross section	4 mm <sup>2</sup>
Colour	Green/yellow
Mounting	Mounting rail TS 35/7.5
Rated impulse voltage	8 kV
Overvoltage category	III
Contamination degree	3

#### DIMENSIONS

Length	56 mm
Width	6.1 mm
Height TS 35/7.5	36.7 mm
Height	35.2 mm

#### CONNECTION DATA

Connections	2
Number of levels	1

Plug gauge acc. EN 60 947-1	A4
Cross connect channels	1
Cross section single wire from	0.2 mm <sup>2</sup>
Cross section single wire to	6 mm <sup>2</sup>
Cross section stranded wire from	0.2 mm <sup>2</sup>
Cross section stranded wire to	4 mm <sup>2</sup>
Cross section stranded with ferrule from	0.25 mm <sup>2</sup>
Cross section stranded with ferrule to	4 mm <sup>2</sup>
Rated wire cross section from	24 AWG
Rated wire cross section to	10 AWG
Stripping length	12 mm

## MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C

## ADDITIONAL DATA

Tariff code	85369010
Country of origin	CZ
Weight	12.2 g
Pack size	50
Number of terminals per level	2

