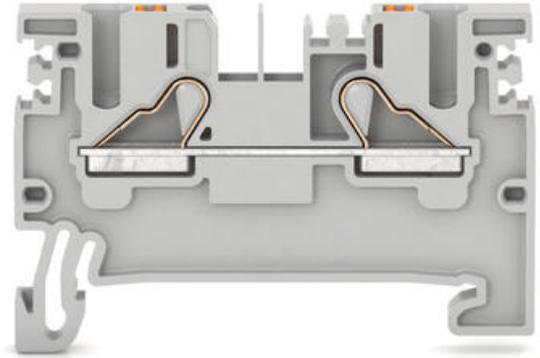


**FEED THROUGH TERMINALS - PRK  
16MM**

PRK, PSL

27033.2  
PSL 16/3A, 16mm<sup>2</sup> Push-in Earth feed through, 1 in, 2  
out

- 16mm Feed through
- up to 4 connections on one level
- Plug In Cross Connectors

**PRODUCT DESCRIPTION****TECHNICAL DATA****GENERAL DATA**

Rated wire cross section	16 mm <sup>2</sup>
Colour	Green/yellow
Mounting	Mounting rail TS 35/7.5
Rated impulse voltage	8 kV
Overvoltage category	III
Contamination degree	3

**DIMENSIONS**

Length	100 mm
Width	12.1 mm
Height TS 35/7.5	49.5 mm
Height	48 mm

**CONNECTION DATA**

Connections	3
Number of levels	1

Plug gauge acc. EN 60 947-1	A7
Cross connect channels	1
Cross section single wire from	0.5 mm <sup>2</sup>
Cross section single wire to	25 mm <sup>2</sup>
Cross section stranded wire from	0.5 mm <sup>2</sup>
Cross section stranded wire to	16 mm <sup>2</sup>
Cross section stranded with ferrule from	0.5 mm <sup>2</sup>
Cross section stranded with ferrule to	16 mm <sup>2</sup>
Rated wire cross section from	20 AWG
Rated wire cross section to	4 AWG
Stripping length	18 mm

## MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C

## ADDITIONAL DATA

Tariff code	85369010
Country of origin	DE
Weight	1 g
Pack size	50
Number of terminals per level	3