


FEED THROUGH TERMINALS - PRK 16MM

PRK, PSL

27034.6

PRK 16/4A Grey, 16mm² Push-in feed through, 2 in, 2 out

- 16mm Feed through
- up to 4 connections on one level
- Plug In Cross Connectors

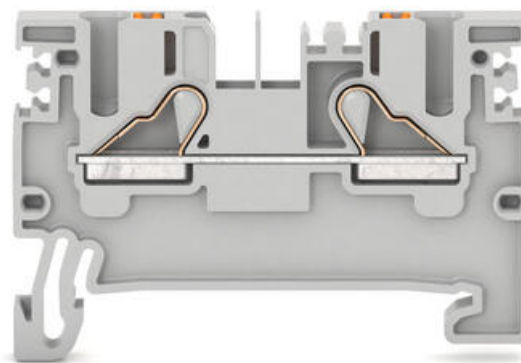

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Rated wire cross section	16 mm ²
Colour	Grey
Rated voltage IEC	1000 V
Rated current IEC	85 A
Mounting	Mounting rail TS 35/7.5
Rated impulse voltage	8 kV
Overvoltage category	III
Contamination degree	3

DIMENSIONS

Length	123 mm
Width	12.1 mm
Height TS 35/7.5	49.5 mm
Height	48 mm

CONNECTION DATA

Connections	4
Number of levels	1
Plug gauge acc. EN 60 947-1	A7
Cross connect channels	2
Cross section single wire from	0.5 mm ²
Cross section single wire to	25 mm ²
Cross section stranded wire from	0.5 mm ²
Cross section stranded wire to	16 mm ²
Cross section stranded with ferrule from	0.5 mm ²
Cross section stranded with ferrule to	16 mm ²
Rated wire cross section from	20 AWG
Rated wire cross section to	4 AWG
Stripping length	18 mm

MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C

ADDITIONAL DATA

Tariff code	85369010
Country of origin	DE
Weight	1 g
Pack size	50
Number of terminals per level	4