OEM AUTOMATIC

OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

CONTACLIP

EARTH TERMINALS - PSL 1.5-16MM

Push In Earth Terminals -PSL

27035.2
PSL 16/4A, 16mm² Push-in Earth feed through, 2 in, 2 out

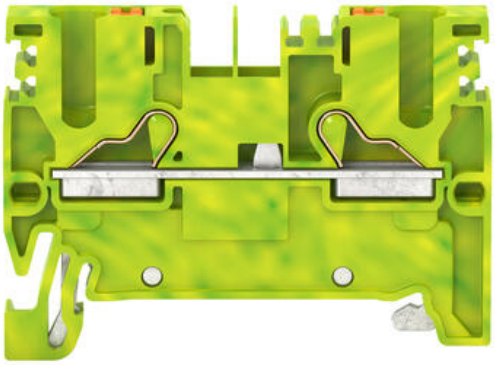

- Snap on
- 2 to 4 connections
- Pluggable cross connectors
- Push button cable release
- Test pick off point

PRODUCT DESCRIPTION

Snap on range of Push In Earth Terminals from 1.5mm² to 16mm², in 2 , 3 and 4 connections that clamps to both sides of the TS35 DIN Rail.

TECHNICAL DATA

GENERAL DATA

Rated wire cross section	16 mm²
Colour	Green/yellow
Mounting	Mounting rail TS 35/7.5
Rated impulse voltage	8 kV
Overvoltage category	III
Contamination degree	3

DIMENSIONS

Length	123 mm
Width	121 mm
Height TS 35/7.5	495 mm
Height	48 mm

CONNECTION DATA

Connections	4
Number of levels	1

Plug gauge acc. EN 60 947-1	A7
Cross connect channels	1
Cross section single wire from	5 mm²
Cross section single wire to	25 mm²
Cross section stranded wire from	5 mm²
Cross section stranded wire to	16 mm²
Cross section stranded with ferrule from	5 mm²
Cross section stranded with ferrule to	16 mm²
Rated wire cross section from	20 AWG
Rated wire cross section to	4 AWG
Stripping length	18 mm

MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C

ADDITIONAL DATA

Tariff code	85369010
Country of origin	CZ
Weight	72.22 g
Pack size	50

Number of terminals per level	4