


MINIATURE TERMINALS TS15/32/35 - RK 1.5-4, SRK 2.5

RK1.5-4, SRK 2.5

1010.4

RK1.5 4/15 Black, 4mm² Miniature feed through, TS15

- Compact - ideal for small enclosures
- TS15/TS32 & TS35 range
- up to 4mm² cables
- cross connectable
- Polymide 6.6-V2

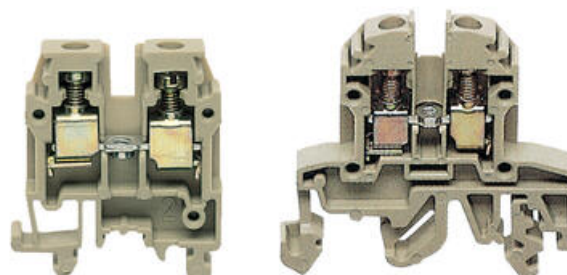

PRODUCT DESCRIPTION

This mixed range of compact terminals is ideal for applications where space is at a premium.

The SRK2.5/15 range is the most compact, sitting only 29.5mm high when mounted on TS15 rail.

Alternatively, if you do not want din rail mounted terminals, the BKA rang are also compact, but can be mounted directly in the enclosure or back plate.

TECHNICAL DATA

GENERAL DATA

| | |
|--------------------------|----------------------------|
| Rated wire cross section | 4 mm ² |
| Colour | Black |
| Rated voltage IEC | 500 V |
| Rated current IEC | 32 A |
| Mounting | TS 15 |
| Rated impulse voltage | 6 kV |
| Overvoltage category | III |
| Contamination degree | 3 |
| Approvals | UL, CSA, GL, KEMA KUR, EAC |

DIMENSIONS

| | |
|------------------|---------|
| Length | 27 mm |
| Width | 6 mm |
| Height TS 15/5.5 | 34.5 mm |

CONNECTION DATA

| | |
|--|---------------------|
| Connections | 2 |
| Number of levels | 1 |
| Plug gauge acc. EN 60 947-1 | A4 |
| Cross connect channels | 1 |
| Number of test pick off options | 2 |
| Cross section single wire from | 0.2 mm ² |
| Cross section single wire to | 4 mm ² |
| Cross section stranded wire from | 0.2 mm ² |
| Cross section stranded wire to | 4 mm ² |
| Cross section stranded with ferrule from | 0.2 mm ² |
| Cross section stranded with ferrule to | 4 mm ² |
| Rated wire cross section from (AWG) | 22 |
| Rated wire cross section to (AWG) | 10 |
| Stripping length | 9 mm |
| Screw size | M 3 |
| Screw type | Slotted |
| Torque min | 0.5 |
| Torque max | 1 |

MATERIALS

| | |
|----------------------------|---------------|
| Insulation material | Polyamide 6.6 |
| Flammability class | UL94-V2 |
| Operating temperature from | -40 °C |
| Operating temperature to | 105 °C |

APPROVALS

| | |
|-------------------------|--------------------|
| UL test standard | UL 1059 |
| Rated voltage CSA | 300 V |
| Rated current CSA | 40 A |
| CSA test standard | C22.2 No 158 |
| GL test standard | IEC 60947-7-1:2002 |
| EAC test standard | TR ZU 004/2011 |
| KEMA KEUR test standard | EN 60947-7-1:2009 |

ADDITIONAL DATA

| | |
|-------------|----------|
| Tariff code | 85369010 |
|-------------|----------|

| | |
|-------------------|--------|
| Country of origin | CZ |
| Weight | 5.64 g |
| Pack size | 100 |

