

EARTH TERMINALS - SNAP ON - SSL


2.5-35 MM²

SSL

87806.2

SSL6/2A, Snap on 6mm Ex certified earth terminal

- Snap on construction
- Secure fixings on both sides of the rail
- Can be cross connected
- Material polyamide 6.6- UL94-V0
- emperature resistance -40 °C...+120 °C

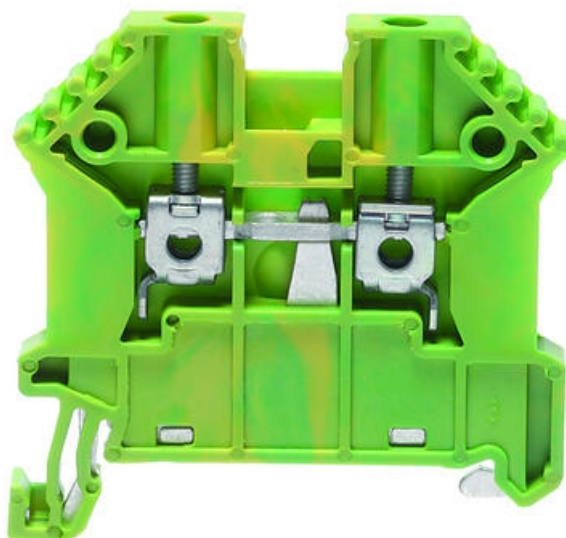

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Rated wire cross section	10 mm ²
Colour	Green/yellow
Mounting	TS 35
Overvoltage category	III
Contamination degree	3
Approvals	UL, CSA, GL, CSA US, cUL, KEMA KUR, EAC
Explosion proof	Yes

DIMENSIONS

Length	48 mm
Width	10 mm
Height TS 35/7.5	47 mm

CONNECTION DATA

Connections	2
Number of levels	1
Plug gauge acc. EN 60 947-1	B7

Cross connect channels	1
Number of test pick off options	1
Cross section single wire from	0.2 mm ²
Cross section single wire to	16 mm ²
Cross section stranded wire from	0.2 mm ²
Cross section stranded wire to	16 mm ²
Cross section stranded with ferrule from	0.2 mm ²
Cross section stranded with ferrule to	10 mm ²
Rated wire cross section from (AWG)	18
Rated wire cross section to (AWG)	6
Stripping length	10 mm
Screw size	M 4
Screw type	Slotted
Torque min	1.2
Torque max	2.4

MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C

APPROVALS

UL test standard	UL 1059
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
cUL test standard	C22.2 No 158
GL test standard	IEC 60947-7-2:2009
EAC test standard	TR ZU 004/2011
KEMA KEUR test standard	EN 60947-7-2:2009

ADDITIONAL DATA

Tariff code	85369010
Country of origin	CZ
Weight	28.11 g
Pack size	100

Type of terminal

Screw Terminals, DIN Rail terminals