

EARTH TERMINALS - SNAP ON - SSL


2.5-35 MM²

SSL

17147.2

SSL 35/2A/IS, Snap on 35mm earth terminal, Allen Key screw

- Snap on construction
- Secure fixings on both sides of the rail
- Can be cross connected
- Material polyamide 6.6- UL94-V0
- emperature resistance -40 °C...+120 °C

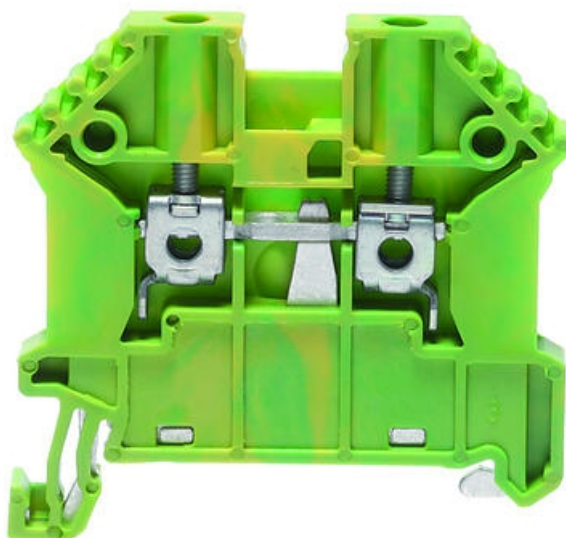

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Rated wire cross section	35 mm ²
Colour	Green/yellow
Mounting	TS 35
Overvoltage category	III
Contamination degree	3
Approvals	UL, CSA, CSA US, KEMA KUR, EAC
Additional information	with allen screws

DIMENSIONS

Length	59 mm
Width	16.1 mm
Height TS 35/7.5	65.5 mm

CONNECTION DATA

Connections	2
Number of levels	1
Plug gauge acc. EN 60 947-1	B9

Cross connect channels	1
Number of test pick off options	1
Cross section single wire from	1.5 mm ²
Cross section single wire to	50 mm ²
Cross section stranded wire from	1.5 mm ²
Cross section stranded wire to	50 mm ²
Cross section stranded with ferrule from	1.5 mm ²
Cross section stranded with ferrule to	35 mm ²
Rated wire cross section from (AWG)	16
Rated wire cross section to (AWG)	1/0
Stripping length	18 mm
Screw size	M 6
Screw type	Hexagon/Allen key
Torque min	3.2
Torque max	3.7

MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C

APPROVALS

UL test standard	UL 1059
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
EAC test standard	TR ZU 004/2011
KEMA KEUR test standard	EN 60947-7-2:2009

ADDITIONAL DATA

Tariff code	85369010
Country of origin	DE
Weight	86.7 g
Pack size	20
Type of terminal	Screw Terminals, DIN Rail terminals

