


## DOUBLE DECK TERMINALS - FRKD/FSLD 2.5MM<sup>2</sup>

FRKD,FSLD,

3206.2  
FRKD 2,5/3A BG

- Wiring without tools
- Internally linked versions
- Colour coded options
- 2 and 3 connections
- Electronic component versions

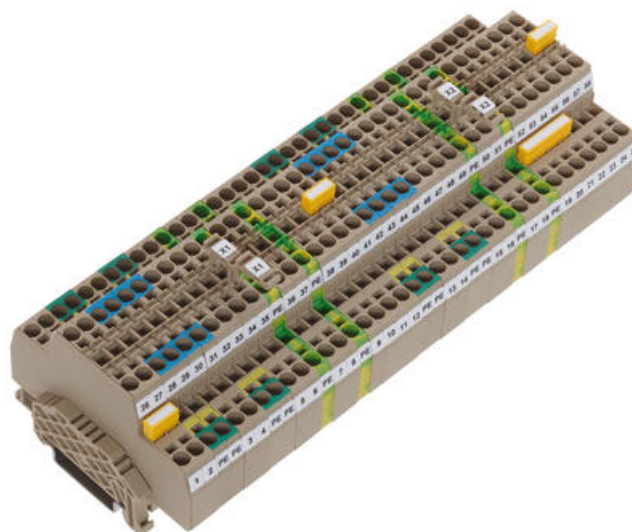

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

|                          |                     |
|--------------------------|---------------------|
| Rated wire cross section | 2.5 mm <sup>2</sup> |
| Colour                   | Beige               |
| Rated voltage IEC        | 500 V               |
| Rated current IEC        | 24 A                |
| Mounting                 | TS 35               |
| Rated impulse voltage    | 6 kV                |
| Overvoltage category     | III                 |
| Contamination degree     | 3                   |
| Approvals                | KEMA KUR, EAC       |

#### DIMENSIONS

|                  |         |
|------------------|---------|
| Length           | 97.5 mm |
| Width            | 5.1 mm  |
| Height TS 35/7.5 | 52.5 mm |

#### CONNECTION DATA

|                  |       |
|------------------|-------|
| Connections      | 2 x 3 |
| Number of levels | 2     |

|  |                     |
|--|---------------------|
| Plug gauge acc. EN 60 947-1              | A3                  |
| Cross connect channels                   | 2                   |
| Cross section single wire from           | 0.2 mm <sup>2</sup> |
| Cross section single wire to             | 4 mm <sup>2</sup>   |
| Cross section stranded wire from         | 0.2 mm <sup>2</sup> |
| Cross section stranded wire to           | 4 mm <sup>2</sup>   |
| Cross section stranded with ferrule from | 0.2 mm <sup>2</sup> |
| Cross section stranded with ferrule to   | 2.5 mm <sup>2</sup> |
| Rated wire cross section from (AWG)      | 26                  |
| Rated wire cross section to (AWG)        | 14                  |
| Stripping length                         | 12 mm               |

## MATERIALS

|                            |               |
|----------------------------|---------------|
| Insulation material        | Polyamide 6.6 |
| Flammability class         | UL94-V0       |
| Operating temperature from | -40 °C        |
| Operating temperature to   | 120 °C        |

## APPROVALS

|                         |                   |
|-------------------------|-------------------|
| EAC test standard       | TR ZU 004/2011    |
| KEMA KEUR test standard | EN 60947-7-1:2009 |

## ADDITIONAL DATA

|                   |          |
|-------------------|----------|
| Tariff code       | 85369010 |
| Country of origin | BG       |
| Weight            | 18.42 g  |
| Pack size         | 50       |